


# T2832 WALL PANEL

CONDENSED  
TECHNICAL  
REFERENCE

## WALL PANEL

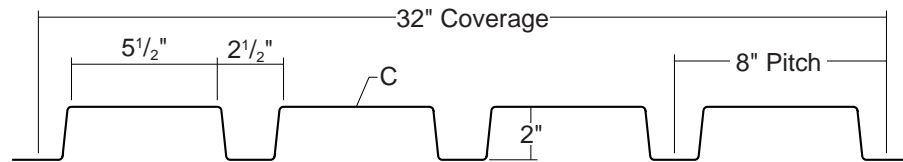

ARCHITECTURAL  
COMMERCIAL  
INDUSTRIAL  
PANEL

DIRECT  
FASTEN


32"  
COVERAGE

WALL  
PANEL

OPEN FRAMING OR  
SOLID SUBSTRATE

## PANEL OVERVIEW

- ▶ Finishes: Kynar 500 (PVDF) standard, optional; multi-pass Kynar, Marblique, Plastisol, Polyester, and MS Colorfast45® (SMP)
- ▶ Gauges: 24ga, 22ga, 20ga, and 18ga
- ▶ 32" panel coverage, 2" rib height
- ▶ Trapezoidal ribs on 8" centers
- ▶ Optional material availability: Stainless Steel, Copper, and Aluminum
- ▶ Custom capabilities include:
  - Perforated panels for wind screens and liner panels
- ▶ Exposed Fastened Panel

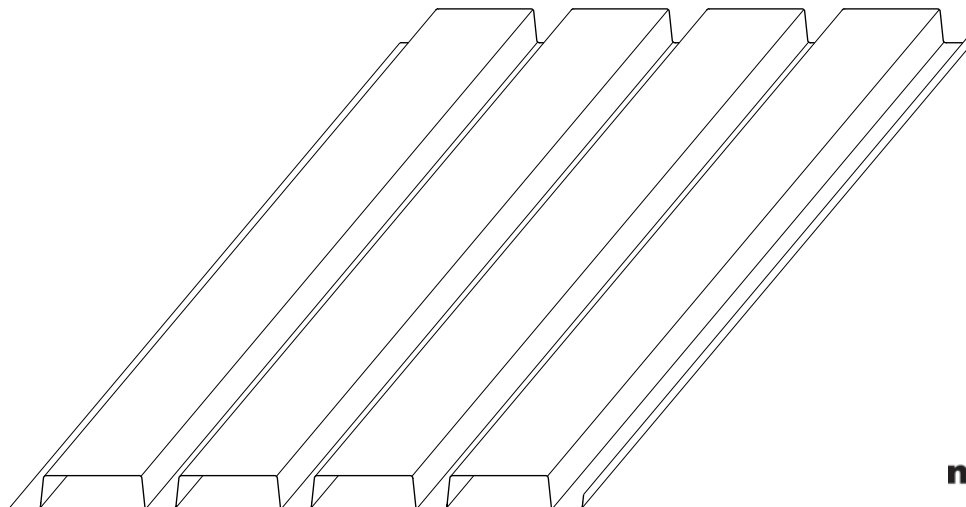


metal sales  
manufacturing corporation



# T2832 WALL PANEL


## CONDENSED TECHNICAL REFERENCE

### ATTACHMENT DETAIL

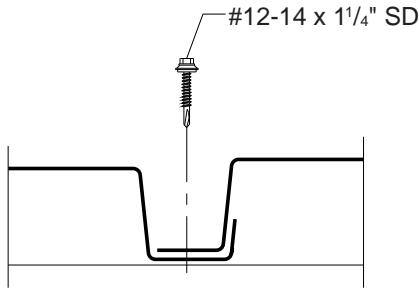


### FASTENING PATTERNS

#### Ends of Panel

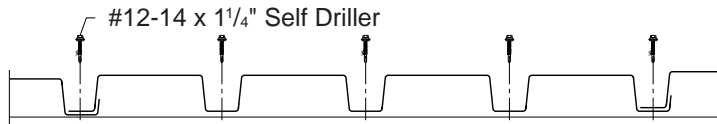

#### Field of Panel

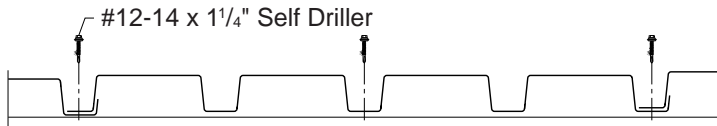

### GENERAL INFORMATION

#### ► Substructure

T2832 Panel is designed to be utilized over open structural framing, or a solid substrate.

#### ► Coverage

T2832 Panels are available in a 2" depth with a 32" width coverage.

#### ► Length

Minimum factory cut length is 5'-0".  
Maximum recommended panel length is 32'-0".

#### ► Fasteners

The fastener selection guide should be consulted for choosing the proper fastener for specific applications. Quantity and type of fastener must meet necessary loading and code requirements.

*NOTE: All panels are subject to surface distortion due to improperly applied fasteners. Overdriven fasteners will cause stress and induce oil canning across the face of the panel at or near the point of attachment.*

#### ► Availability

Finishes: Kynar 500 (PVDF) standard; optional: multi-pass Kynar, Marblique, Plastisol, Polyester, and MS Colorfast45® (SMP)  
Gauges: 24ga, 22ga, 20ga, and 18ga

### SECTION PROPERTIES

### ALLOWABLE UNIFORM LOADS PSF (3 or More Equal Spans)

Ga.	Width (in.)	Yield KSI	Weight PSF	Top in Compression				Bottom in Compression				Inward Load						Outward Uplift Load					
				Ixx		Sxx		Ixx		Sxx													
				In <sup>4</sup> /ft	In <sup>3</sup> /ft	In <sup>4</sup> /ft	In <sup>3</sup> /ft	In <sup>4</sup> /ft	In <sup>3</sup> /ft	6'	7'	8'	10'	12'	14'	6'	7'	8'	10'	12'	14'		
24	32"	50	1.35	0.1534	0.1320	0.2033	0.1451	92	68	52	34	23	16	84	62	48	31	21	16				
22	32"	50	1.78	0.2190	0.1964	0.2955	0.2188	140	103	79	51	34	22	126	93	71	46	32	22				
20	32"	33	2.11	0.2888	0.2783	0.3825	0.2951	124	91	70	45	31	23	117	86	66	43	30	22				
18	32"	33	2.78	0.4200	0.4065	0.5488	0.4144	173	128	98	63	44	32	170	126	97	62	43	32				

- Theoretical section properties have been calculated per AISI 2001 "Specification for the Design of Cold-formed Steel Structural Members." Ixx and Sxx are effective section properties for deflection and bending.
- Allowable load is calculated in accordance with AISI 2001 specifications considering bending, shear, combined bending and shear, deflection, and applicable testing when available. Allowable load considers the worst case of 3 and 4 equal span conditions. Allowable load does not address web crippling or fasteners/support connection and panel weight is not considered.
- Deflection consideration is limited by a maximum deflection ratio of L/180 of span.
- Allowable loads do not include a 1/3 stress increase in uplift.

metal sales  
manufacturing corporation



Kent, WA (800) 431-3470  
Temple, TX (800) 543-4415  
Longmont, CO (800) 289-7663  
Antioch, TN (800) 251-8508  
Woodland, CA (800) 759-6019  
Rogers, MN (800) 328-9316  
Spokane, WA (800) 572-6565

Jefferson, OH (800) 321-5833  
Rock Island, IL (800) 747-1206  
Sellersburg, IN (800) 999-7777  
Jacksonville, FL (800) 394-4419  
Orwigsburg, PA (800) 544-2577  
Independence, MO (800) 747-0012  
Fontana, CA (800) 782-7953

Anchorage, AK (866) 640-7663  
Bay City, MI (888) 777-7640  
Detroit Lakes, MN (888) 594-1394  
Mocksville, NC (800) 228-6119

©MST2832W/11-2008