


# T7-A WALL PANEL

CONDENSED  
TECHNICAL  
REFERENCE

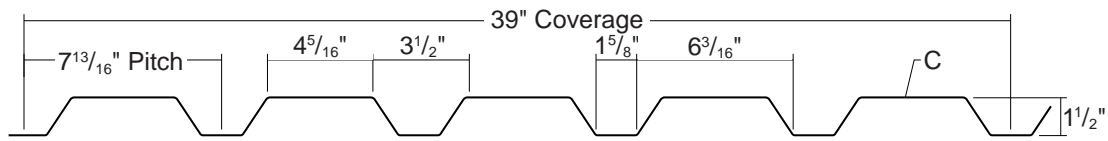

ARCHITECTURAL  
COMMERCIAL  
INDUSTRIAL  
PANEL

DIRECT  
FASTEN


39"  
COVERAGE

WALL  
PANEL

OPEN FRAMING OR  
SOLID SUBSTRATE

## PANEL OVERVIEW

- ▶ Finishes: Kynar 500 (PVDF) standard, optional; multi-pass Kynar, Marblique, Plastisol, Polyester, and MS Colorfast45<sup>®</sup> (SMP)
- ▶ Gauges: 24ga, 22ga, 20ga, and 18ga
- ▶ 39" panel coverage,  $1\frac{1}{2}$ " rib height
- ▶ Trapezoidal ribs on  $7\frac{13}{16}$ " centers
- ▶ Exposed Fastener Panel
- ▶ Optional material availability: Stainless Steel, Copper, and Aluminum
- ▶ Custom capabilities include:
  - Crimp curving (convex only)
  - Perforated panels for wind screens and liner panels

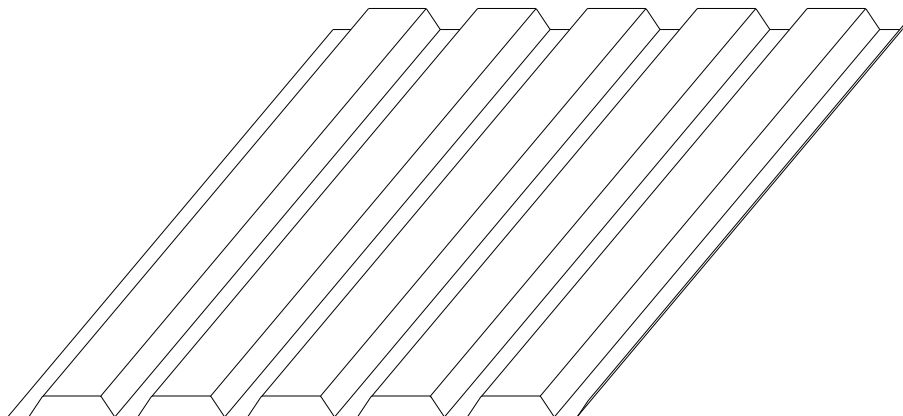

## TESTING

- ▶ ASTM E-331 Water Penetration
- ▶ ASTM E-283 Air Infiltration


metal sales  
manufacturing corporation



# T7-A WALL PANEL


## CONDENSED TECHNICAL REFERENCE

### ATTACHMENT DETAIL

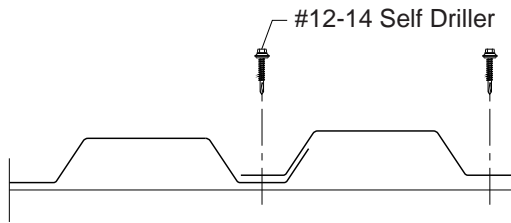


### FASTENING PATTERN

#### Ends of Panel



#### Field of Panel



### GENERAL INFORMATION

#### ► Substructure

T7-A Panels are designed to be utilized over open structural framing or a solid substrate.

#### ► Coverage

T7-A Panels are available in a 1 1/2" depth with a coverage width of 39".

#### ► Length

Minimum factory cut length is 5'-0".

Maximum recommended panel length is 31'-10".

#### ► Fasteners

The fastener selection guide should be consulted for choosing the proper fastener for specific applications. Quantity and type of fastener must meet necessary loading and code requirements.

*NOTE: All panels are subject to surface distortion due to improperly applied fasteners. Overdriven fasteners will cause stress and induce oil canning across the face of the panel at or near the point of attachment.*

#### ► Availability

Finishes: Kynar 500 (PVDF) standard; optional: multi-pass Kynar, Marblique, Plastisol, Polyester, and MS Colorfast45<sup>®</sup> (SMP)

Gauges: 24ga, 22ga, 20ga, and 18ga

### SECTION PROPERTIES

### ALLOWABLE UNIFORM LOADS PSF (3 or More Equal Spans)

Ga.	Width (in.)	Yield KSI	Weight PSF	Top in Compression		Bottom in Compression		Inward Load						Outward Load					
				Ixx In <sup>4</sup> /ft	Sxx In <sup>3</sup> /ft	Ixx In <sup>4</sup> /ft	Sxx In <sup>3</sup> /ft	5'	6'	7'	8'	10'	12'	5'	6'	7'	8'	10'	12'
24	39"	50	1.16	0.0794	0.0941	0.1046	0.1035	95	66	49	37	21	12	86	60	44	34	21	12
22	39"	50	1.54	0.1138	0.1413	0.1477	0.1508	139	97	71	55	28	16	130	91	67	51	28	16
20	39"	33	1.82	0.1508	0.1982	0.1938	0.2022	122	85	63	48	31	19	120	84	62	47	30	19
18	39"	33	2.40	0.2215	0.2680	0.2585	0.2711	163	114	84	65	42	25	162	113	83	64	41	25

- Theoretical section properties have been calculated per AISI 2001. "Specifications for the Design of Cold-formed Steel Structural Members." Ixx and Sxx are effective section properties for deflection and bending.
- Allowable load is calculated in accordance with AISI 2001 specifications considering bending, shear, combined bending and shear and deflection. Allowable load considers both 3 and 4 equal span conditions. Allowable load does not address web crippling or fasteners/support connection. Panel weight is not considered.
- Deflection consideration is limited by a maximum deflection ratio of L/180 of span.
- Allowable loads do not include a 1/3 stress increase in uplift.

**metal sales**  
manufacturing corporation



Kent, WA (800) 431-3470  
Temple, TX (800) 543-4415  
Longmont, CO (800) 289-7663  
Antioch, TN (800) 251-8508  
Woodland, CA (800) 759-6019  
Rogers, MN (800) 328-9316  
Spokane, WA (800) 572-6565

Jefferson, OH (800) 321-5833  
Rock Island, IL (800) 747-1206  
Sellersburg, IN (800) 999-7777  
Jacksonville, FL (800) 394-4419  
Orwigsburg, PA (800) 544-2577  
Independence, MO (800) 747-0012  
Fontana, CA (800) 782-7953

Anchorage, AK (866) 640-7663  
Bay City, MI (888) 777-7640  
Detroit Lakes, MN (888) 594-1394  
Mocksville, NC (800) 228-6119

©MST7-AW/11-2008