


SCHLAGE

Architectural guide



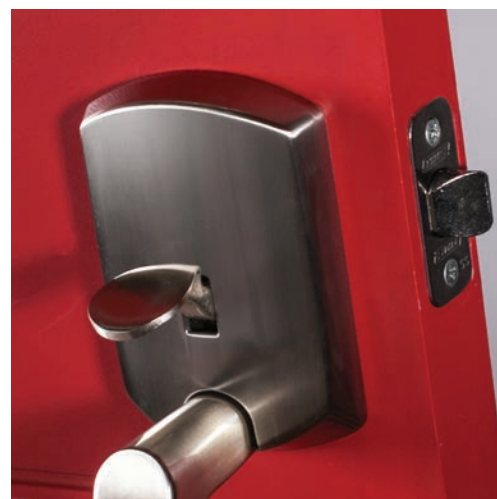

Contents

Residential programmable electronic deadbolt	5
Multi-family readers and credentials	6
Mechanical interconnected locks	7
Residential electronic deadbolts and locksets	8-9
BE Series and FE Series residential keypad deadbolts and locksets	10
B Series mechanical deadbolts	11
F Series handlesets	12
Decorative collections	13
F Series knobs and levers	14
Schlage J Series	15-16
Schlage builders hardware	17-18





For more than 90 years, Schlage has been creating the strongest and most technologically advanced security products for homes, multi-family, commercial and institutional buildings. From durable mechanical locks to comprehensive electronic access control solutions and biometrics, Schlage provides protection at critical moments – when property and personal security are at stake. In homes, public buildings and in the workplace at the end of the day Schlage stands for one thing: strong.

Residential door hardware

We've taken our experience in commercial door hardware and applied it to developing some of the toughest, most advanced door hardware for residential applications. From innovative electronic keypad locks to elegant high security handlesets, interior levers, knobs and decorative hardware, our residential products deliver reliable security and a wide variety of styles and finishes to complement any home design.





Strong has a name

For the past 90 years, Schlage has been creating the strongest and most technologically advanced products to help our consumers secure and monitor their homes and businesses.



Schlage residential programmable electronic deadbolt

The computer managed locking system for multi-family applications.

The Schlage programmable electronic deadbolt makes it easier than ever to provide controlled, credentialed access for residents, employees and service professionals throughout a multi-family community or building. This easy-to-use deadbolt can be managed and programmed using multi-family software and handheld HHD programmer, and is ideal for a variety of applications.

- Resident entry doors
- Office doors
- Clubhouse doors
- Laundry rooms
- Storage rooms
- Conference rooms
- Equipment rooms
- Fitness centers

Specifications

Latch	1" x 2 1/4" (25mm x 57mm) radius corner faceplate; 1" (25mm) housing diameter requires 1" (25mm) edge bore; 1" (25mm) throw with Triple Option™ square corner, radius corner and circular drive-in faceplates
Strikes	1 1/8" x 2 3/4" (29mm x 70mm), square corner, strike reinforcer
Backset	Adjustable backset, fits 2 3/8" to 2 3/4" (60mm - 70mm) backsets
Cylinder	5-pin, keyed 5-pin, C keyway, keyed different (KD)
Door range	1 3/8" to 1 3/4" (35mm - 44mm), thick door kit available for up to 2 1/2" (64mm)
Keys	5-pin, C-section
Hole distance	Minimum 5 1/2" (140mm) center-to-center distance between cross bore holes
Battery	9-volt battery included with average two-year battery life
Construction	All-metal chassis and escutcheons
Button	Silicone rubber, wear-resistant with LED backlight
Certifications	Available 3 hr. and 20 min. UL Listed; A 156.5-2001 Grade 2 auxiliary locks or Grade 2 ANSI/BHMA certified; FCC Part 15; CE mark



BE367 Series
Plymouth style



BE367 Series
Camelot style

More safety, security and convenience


Customize and control building access quickly, easily and as often as needed. The HHD programmer and our multi-family software allow you to manage your programmable electronic deadbolts with no new or additional hardwiring to support the system.

- Stores 500 users and the last 1000 audits on the lock
- Add or delete users and credentials quickly and easily
- Time zone settings control access hours for residents, employees and others
- Audit trail shows who accessed any deadbolt on the property and when
- Residents have just one credential to access their unit and common areas
- Only the property owner or manager can authorize additional or replacement credentials
- Schlage iButton credentials cannot be duplicated, so residents can be assured that only authorized persons have access to the building


Finishes




605
Bright brass



609
Antique brass



613
Oil-rubbed bronze




619
Satin nickel



620
Antique pewter



625
Bright chrome



626
Satin chrome



716
Aged bronze



Multi-family readers and credentials

All the tools you need to manage every opening in your building.

Credential readers

- Accommodates interior, exterior, metal and metal installation environments
- Recognizes most proximity credentials, magnetic stripe, proximity, and smart credentials including aptiQ MIFARE Classic and MIFARE DESFire EV1 credentials
- FIPS 201-1 compliant
- NFC compatible
- Quick-connect wiring harness for easy installation
- Simple wiring - color scheme is identical to most readers
- Easy-to-install mounting bracket
- Tri-state LED
- Wiegand output
- Multiple reader cover color options
- Limited lifetime warranty



Schlage multi-family software

- Lets you manage an entire facility with one software package
- Quick, easy adding or deleting of credential holders
- Set individual access rights based on time, location and more
- Offline lock interface for easy management of multiple lock products

Credentials

- User/resident credentials
 - Over three billion code combinations
 - Cannot be duplicated except by property manager and owner
- Programming credentials
 - Required for lock programming
 - Construction credential
 - Used during construction; operates all electronic locks that haven't been programmed
- Vendor credentials
 - Used to allow temporary access to employees and vendors in conjunction with the Schlage vendor access management system software



Electronic interconnected locks

Standard features

- Time and date controlled access
- 1000 event audit trail
- Manage up to 500 users
- Interconnect mechanism is adjustable
- Lever trim is non-handed and field reversible
- Split finishes and designs available
- Battery powered – no hard wiring required
- Hidden back-up mechanical key override



Specifications

ANSI/BHMA	Grade 2 certified
UL rating	UL 3-hour rating is standard
Latch	UL latch comes with 1" x 2 1/4" square and round corner face plans (square corner standard, round corner included in package. 1" edge bore required)
Strikes	1 1/8" x 2 3/4" square corner deadbolt strikes and 2 1/4" x 1 5/8" square corner full lip latch strikes reinforcer. Dust box not included.
Backset	Adjustable backset, fits 2 3/8" or 2 3/4" backsets
Levers	All lever trim is non-handed and field reversible
Stile width	Minimum 4 1/2" for 2 3/8" backset, minimum 5" stile for 2 3/4"
Return to door	Saturn (SAT) and Neptune (NEP) are return to door code compliant
Cylinder	5-pin solid brass, layered 5-pin, C keyway, keyed different (KD)
Keys	5-pin, C section
Door range	1 3/8" to 1 3/4" standard. 1 3/4" to 2 optional. Must be specified.
Center to center	Fits 4" or 5 1/2" center to center door preps
Battery	9V battery included
Credential	Deadbolt is operated using iButton credential (sold separately)


Finishes



505
Bright brass




609
Antique brass



619
Satin nickel



625
Bright chrome



626
Satin chrome



716
Aged bronze

Mechanical interconnected locks

The RS210F and CS210F mechanical interconnected locks provide panic-free, single motion egress and comply with the requirements of the National Fire Protection Association (NFPA) codes and local building codes.

To meet the demands of residents, the mechanical interconnect is available with several new features:

- Both the RS210F and CS210F accept a variety of commercial and all residential levers, to provide never before available suiting options for our Schlage interconnected product line
- Available in split lever designs and finishes
- Select levers are code-compliant with return to door requirements and meet ADA requirements
- The interconnect mechanism is adjustable to 4 and 5½ door preparations



Specifications

ANSI/BHMA	Grade 2 certified
UL rating	UL 3-hour rating is standard
Latch	UL latch comes with 1" x 2 1/4" square and round corner face plans (square corner standard, round corner included in package. 1" edge bore required.
Strikes	1 1/8" x 2 3/4" square corner deadbolt strikes and 2 1/4" x 1 5/8" square corner full lip latch strikes reinforcer. Dust box not included.
Backset	Adjustable backset, fits 2 3/8" or 2 3/4" backsets
Levers	All lever trim is non-handed and field reversible
Stile width	Minimum 4 1/2" for 2 3/8" backset, minimum 5" stile for 2 3/4"
Return to door	Saturn (SAT) and Neptune (NEP) lever styles are return to door code compliant
RS210F cylinder	5-pin solid brass, layered 5-pin, C keyway, keyed different (KD)
CS210F cylinder	6-pin solid brass, keyed 6-pin, C123 keyway, keyed different (KD), Keys are 6-pin, Everest C123 section.
Keys	5-pin, C section
Door range	1 3/8" to 1 3/4" standard. 1 3/4" to 2 optional. Must be specified
Center to center	Fits 4" or 5 1/2" center to center door preps

Benefits

- Single motion egress meets life and safety code requirements
- Ideal for both new construction and renovation/aftermarket projects
- Easy to install, fits standard door preparations


Markets

- Apartment communities
- Assisted living communities
- Student housing
- Light commercial
- Single family condominiums and town homes

Finishes



505
Bright brass




609
Antique brass



619
Satin nickel



625
Bright chrome



626
Satin chrome



716/643e
Aged bronze



Residential electronic deadbolts and locksets

Connected deadbolts & levers



BE469NX
Camelot (CAM)



BE369NX
Camelot (CAM)



FE599NX
Camelot x Accent Lever



BE469NX
Century x Elan Lever



FE469NX
Camelot x Accent Lever

Schlage connected locks use Z-Wave®, a wireless technology that makes your house smarter, safer, and far more convenient. When these locks are paired with a compatible Z-Wave® home automation system, homeowners can remotely control, manage, and monitor access to their home*.

ANSI A156.36-2010 Grade 1 (deadbolt only)

BE469NX - Connect™ deadbolt with alarm

- Autothrow deadbolt is activated from outside by pressing the Schlage button
- Deadbolt automatically retracted from outside by entering valid user code
- Key can be used to unlock as backup
- Built-in Alarm Technology alerts home owners to potential security threats

ANSI A156.2-2003 Grade 2

FE599NX - Connected keypad lever

- Locks manually operated from outside after entering valid user code

ANSI A156.36-2010 Grade 2

BE369NX - Connected keypad deadbolt

- Locks manually operated from outside after entering valid user code

*Home automation features are dependent upon the system provider
Z-Wave is a registered trademark of Zensys Inc, and/or its subsidiaries

Standard features / configurations

	Connect™ deadbolt BE469NX	Connected keypad deadbolt BE369NX	Connected keypad lever FE599NX
Certification:	ANSI A156.36-2010 Grade 1	ANSI A156.36-2010 Grade 2	ANSI A156.2-2003 Grade 2
Backset:	2 ³ / ₈ " or 2 ³ / ₄ "	2 ³ / ₈ " or 2 ³ / ₄ "	2 ³ / ₈ " or 2 ³ / ₄ "
Strike:	1 ¹ / ₈ " x 2 ³ / ₄ " round corners, strike reinforcer	1 ¹ / ₈ " x 2 ³ / ₄ " round corners, strike reinforcer	1 ³ / ₈ " x 2 ³ / ₄ " radius corner, full lip, latch strike
Key & cylinder:	1 key, 5-pin, C keyway	2 keys, 5-pin, C keyway	2 keys, 5-pin, C keyway
Door thickness:	1 ³ / ₈ " to 1 ³ / ₄ "; thick door kit extends 1 ¹ / ₈ " to 2 ¹ / ₂ "	1 ³ / ₈ " to 1 ³ / ₄ "	1 ³ / ₈ " to 1 ³ / ₄ "
Product dimensions: (wxhxd)	ext: 3" x 4 ³ / ₄ " x 1" int: 3" x 8" x 2"	ext: 3 ¹ / ₈ " x 5 ¹ / ₂ " x 2 ¹ / ₈ " int: 3 ¹ / ₄ " x 7 ¹ / ₂ " x 2 ¹ / ₄ "	ext: 6 ⁷ / ₈ " x 3" x 2 ³ / ₄ " int: 3 ¹ / ₄ " x 8 ¹ / ₄ " x 2 ³ / ₄ "
Communications:	900 MHz (Z-Wave® RF)**	900 MHz (Z-Wave® RF)**	900 MHz (Z-Wave® RF)**
Operating temps:	Ext: -35C to 66C Int: -10C to 49C	Ext: -30C to 66C Int: -10C to 49C	Ext: -30C to 66C Int: -10C to 49C
Battery:	4 AA	9V, 3AA	9V, 4AA
Codes:	Pre-set, unique 6-digit programming code, 2 pre-set unique 4-digit user codes, 30 user code capacity (4-8 digits)	Pre-set, unique 6-digit programming code, 2 pre-set unique 4-digit user codes, 19 code capacity	Pre-set, unique 6-digit programming code, 2 pre-set unique 4-digit user codes, 19 code capacity

** Z-Wave is a registered trademark of Zensys Inc, and/or its subsidiaries.

Residential electronic deadbolts and locksets

BE and FE Series Keypad deadbolt options



Convenient. Secure. Stylish.

Experience keyless freedom with Schlage keypad locks, revolutionary products that bring security to a new level. Our keypad locks combine the convenience of keyless entry with the superior quality you expect from Schlage.

Security and quality

- Grade 2 ANSI/BHMA certified
- Patented commercial-grade clutching motor drive; tested to one million cycles
- Vandal-resistant, free-spinning deadbolt turn and clutching knob/lever design
- Code control; 6-digit programming code required to add and delete user codes
- Warning sounds after four incorrect codes entered; keypad disabled for 30 seconds
- Mechanical key override; patent pending


Convenience

- Convenient keyless access; no keys to hide, lose or forget
- Fits standard door prep; no additional mounting holes required
- Pre-set with random 6-digit programming code and two random 4-digit user codes; no programming required
- 19-user code capacity; 10,000 user code combinations
- Easily programmed right at the keypad; no need to remove inside escutcheon
- Blue LEDs illuminate the keypad on demand for evening use
- Locks can be re-keyed to match existing locks
- 9-volt alkaline battery included, low battery warning and average 3-year life
- Easy access to replace battery
- FE595 model with Flex-lock feature easily switches between lock and passage modes
- FE575 model with Auto-lock feature locks automatically

Specifications

Applications:	Residential single- and multi-family doors
Keying:	5-pin tumbler with two keys per lock; stock locks are keyed 5-pin
Door range:	1 ³ / ₈ " to 1 ³ / ₄ " thick (35mm - 44mm) standard; thick door kit available on BE365
Backset:	Universal latches and deadbolts fit 2 ³ / ₈ " (60 mm) or 2 ³ / ₄ " (70 mm) backsets

Door preparation

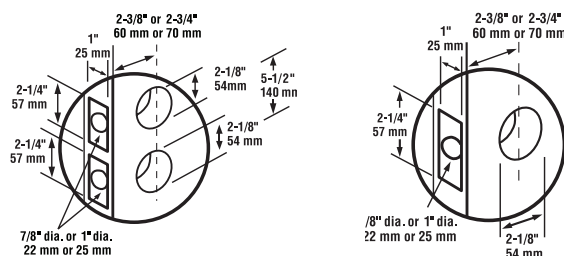



BE Series and FE Series residential keypad deadbolts and locksets

Keypad entry lock options



FE595 Series
Camelot x Accent lever



FE595 Series
Plymouth x Flair lever



FE595 Series
Plymouth x Plymouth knob



FE595 Series
Camelot x Plymouth Knob



FE575 Series
Camelot x Accent lever



FE575 Series
Plymouth x Elan lever



FE575 Series
Plymouth x Plymouth Knob

Standard features

- Lifetime limited mechanical and finish warranty, 1 year electronics warranty
- **Keypad lock latch:** 1" x 2 1/4" (25mm x 57mm) latch with radius corner faceplate, 7/8" (22mm) housing diameter, 1/2" (13mm) throw spring latch with square corner and circular drive-in faceplates
- **Keypad deadbolt latch:** 1" x 2 1/4" (25mm x 57mm) radius corner faceplate, 1" (25mm) housing diameter, requires 1" (25mm) edge bore, 1" (25mm) throw with square corner and circular drive-in faceplates
- **Latch strikes:** 1 5/8" x 2 1/4" (41mm x 57mm), square and radius corner, full lip
- **Deadbolt strike:** 2 3/4" (70mm), round corner, latch strike, metal strike reinforcer
- **Cylinder:** 5-pin solid brass, keyed 5-pin, C keyway, keyed different (KD)

General:

- Minimum 5 1/2" (140mm) center-to-center distance between cross bore holes
- 9-volt battery included with average three-year battery life
- Silicone rubber, wear-resistant buttons with LED backlight
- ANSI A 156.5-2001 Grade 2 auxiliary locks, ANSI A 156.2-2003 bored locks and latches
- FCC Part 15
- CE mark
- BE365 and FE285 available UL Listed (box pack only)

Finishes

BE and FE Series	505	609	613	619	620	625	626	716
BE365 Camelot	▪	▪	▪	▪	▪	▪	▪	▪
BE365 Plymouth	▪	▪	▪	▪	▪	▪	▪	▪
FE595 Camelot x Accent	▪	▪	▪	▪	▪	▪	▪	▪
FE595 Camelot x Georgian	▪	▪		▪				
FE595 Plymouth x Flair	▪	▪	▪	▪	▪	▪	▪	▪
FE595 Plymouth x Plymouth	▪							
FE575 Camelot x Accent	▪	▪	▪	▪	▪	▪	▪	▪
FE575 Plymouth x Flair	▪	▪	▪	▪	▪	▪	▪	▪
FE575 Plymouth x Elan							▪	
FE575 Plymouth x Jazz							▪	
FE575 Plymouth x Plymouth	▪							

See page 50 for finish samples

FE285 available in standard handleset and knob and lever finish options, see page 74 & 76.

B Series mechanical deadbolts

B60, B60R, B62R Series

Grade 1 for high-traffic residential or commercial use.

Shown: B60 single cylinder



Standard features

- Extra security with a full 1" (25mm) throw deadbolt with a concealed hardened steel roller to prevent cutting or sawing the bolt
- 5-minute, 3-step installation
- Anti-pick shield protects against hammer and crow bar attacks
- Available in single and double cylinder
- Available with full-sized interchangeable core (B60R, B62R)


Specifications

Certifications	Exceeds ANSI/BHMA certified A156.5 - 2001, Grade 1, UL Listed for 3-hour fire door (Grade 2 with FSIC)
Applications	Medium-traffic deadbolt, Grade 1 residential or commercial, exterior, new construction and retrofit applications
Deadbolt	1" x 2 1/4" (25mm x 57mm), square and round corner faceplate included, 1" (25mm) housing diameter, 1" (25mm) throw

B500 Series

Grade 2 for medium-traffic commercial and residential use.

Shown: B560P single cylinder



Standard features

- Higher security - 10 percent larger diameter deadbolt
- Tougher performance - seamless steel construction from beginning of latch to back of bolt
- Installation versatility - adjustable backset with lock-in-place helix design
- Available in single and double cylinder†

Specifications

Applications	High-traffic deadlatch, Grade 2 commercial exterior, new construction and retrofit applications
Deadlatch	1 1/8" x 2 1/4" (29mm x 57mm), square corner faceplate, 1" (25mm) housing diameter, 9/16" (14mm) throw
Standard strike	1 1/8" x 2 3/4" (29mm x 70mm), square corner, box

†Patented Primus® XP high security cylinders available.

Finishes


Series	505	605 US3	606 US4	609 US5	612 US10	613 US10B	619 US15	620 US15A	621 US17A	622 US19	625 US26	626 US26D	643/716 US11
B60	■	■		■		■	■	■	■	■	■	■	716
B60R	■	■					■						716
B62R	■	■					■						716
B250		■	■	■	■	■					■	■	
B500		■	■	■	■	■	■				■	■	643
B600		■	■	■	■	■	■				■	■	643

Complete finish chart on page 50

B600, B700, B800 Series

Grade 1 for high-traffic commercial use.

Shown: B660P single cylinder



Standard features

- Solid brass or bronze rotating trim rings
- Hardened steel balls protect mounting bolts from drill attack
- Available in single and double cylinder†


Specifications

Applications	High traffic deadbolt, Grade 1 commercial exterior, new construction and retrofit applications
Deadbolt	1 1/8" x 2 1/4" (29mm x 57mm), square corner faceplate, 1" (25mm) housing diameter, 1" (25mm) throw
Standard strike	1 1/8" x 2 3/4" (29mm x 70mm), square corner, box

B250 Series

Grade 2 for medium-traffic commercial and residential use.

Shown: B250PD deadlatch



Standard features

- Ideally suited for pool, condominium gates and utility panels
- Concealed wood frame reinforcer protects from kick-in attacks
- Holdback feature keeps the deadlatch in a retracted position
- Available in single and double cylinder

Specifications

Applications	High-traffic deadlatch, Grade 2 commercial exterior, new construction and retrofit applications
Deadlatch	1 1/8" x 2 1/4" (29mm x 57mm), square corner faceplate, 1" (25mm) housing diameter, 9/16" (14mm) throw
Standard strike	1 1/8" x 2 3/4" (29mm x 70mm), square corner, box

= Antimicrobial coating available on select finishes

= High-traffic applications

= BHMA certified

= ANSI tested

= Medium-traffic applications


= Helps meet LEED certification

= UL and/or cUL Listed




Residential lock sets F Series – handleset design options

*All F Series Schlage handlesets furnished with Grade 1 B Series deadbolt and feature adjustable through-bolt technology

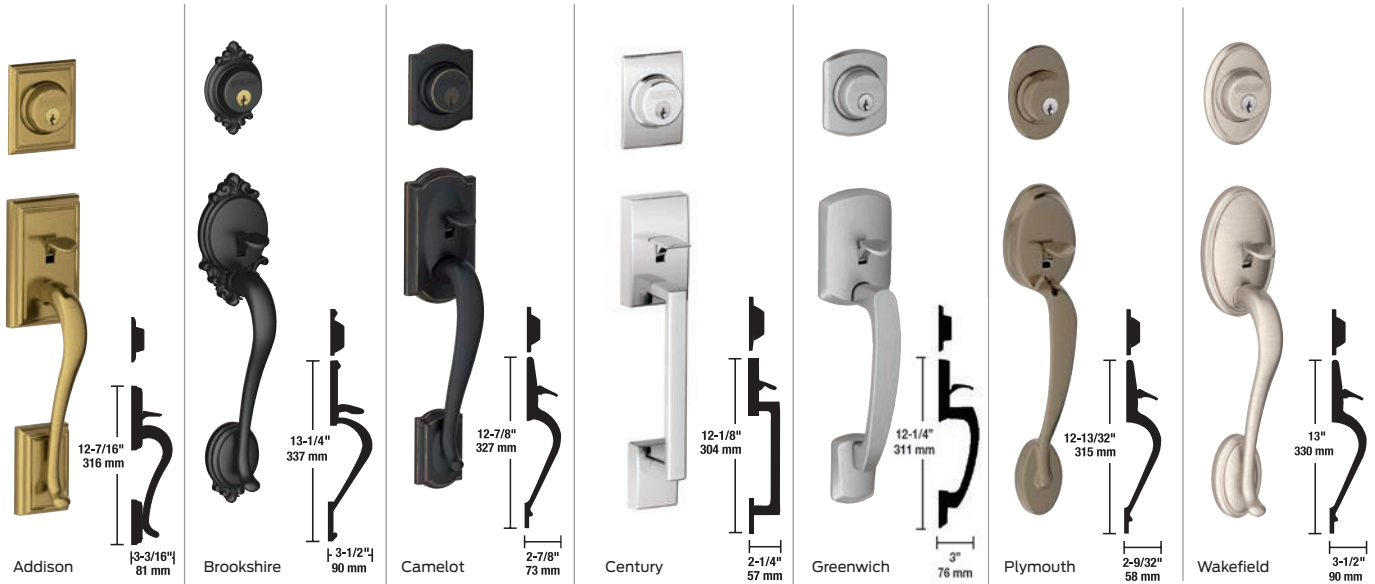

Door preparation

Two piece handleset

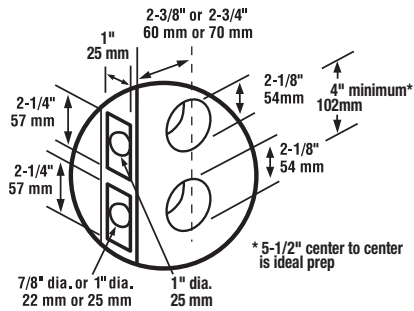

Finishes

Handlesets	505	605	609	613	619	620	621	622	625	626	716
Addison	■	■	■		■	■	■	■	■		■
Brookshire	■	■	■		■			■			■
Camelot	■	■	■	■	■	■		■	■	■	■
Century	■	■	■		■			■	■	■	■
Greenwich					■			■	■	■	■
Plymouth	■	■	■	■	■	■		■	■	■	■
Wakefield	■	■	■	■	■	■		■	■	■	■


Residential lock finishes




505
Bright brass
PVD finish



605
Bright brass



609
Antique brass



613
Oil rubbed
bronze




619
Satin nickel



620
Antique
pewter




621
Distressed
nickel



622
Matte black



625
Bright chrome



626
Satin chrome



716
Aged bronze




= Helps meet LEED certification

Schlage decorative collections F Series knobs and levers

Schlage decorative collections

Our exceptional collections are just the beginning of the expanded choices available both now and in the future — paired with lever and knob designs and finishes in a generous number of combinations to meet the style and security needs of this demanding market:

- Inspired design collections ranging from traditional to contemporary
- Numerous distinctive finishes to choose from
- Pair with your choice of complementing Schlage handlesets
- Solid die-cast construction for durability

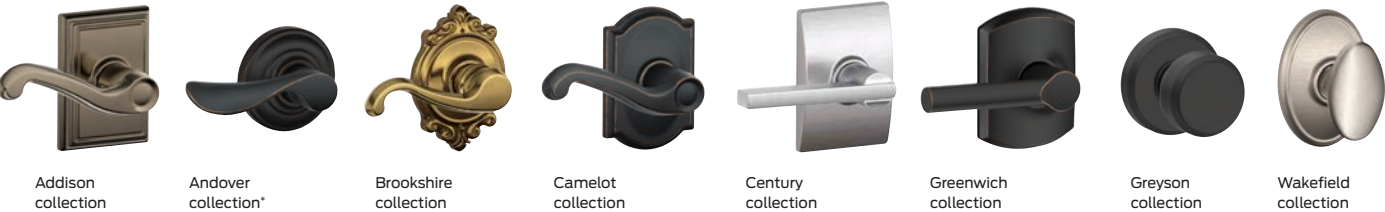

*Features concealed screws

Finishes



Knobs	505	605	609	613	619	620	621	622	625	626	716
Andover	■	■	■	■	■	■			■	■	■
Bell	■	■	■							■	
Bowery					■			■	■	■	■
Georgian	■	■	■		■	■	■	■	■		■
Orbit	■	■	■	■	■	■			■	■	
Plymouth	■	■	■	■	■	■		■	■	■	■
Siena	■	■	■	■	■	■		■	■	■	■
Levers											
Accent	■	■	■	■	■	■	■	■	■	■	■
Avanti	■	■	■	■	■	■			■		■
Avila	■	■	■		■				■	■	
Birmingham					■				■		■
Broadway					■			■	■	■	■
Callington	■	■	■	■	■	■		■	■	■	■
Champagne	■	■	■	■	■	■			■	■	■
Elan		■	■						■	■	■
Flair	■	■	■	■	■	■			■	■	■
Jazz		■	■		■					■	
Latitude					■			■	■	■	■
Manhattan	■	■			■				■	■	
Merano					■			■	■	■	■
Sacramento					■				■	■	■
St. Annes	■	■	■	■	■	■			■	■	■

See page 50 for finish samples


Finishes

Decorative collection	505	605	609	613	619	620	621	622	625	626	716
Addison	■	■	■			■	■	■	■		■
Brookshire	■	■	■		■			■			■
Camelot	■	■	■	■	■	■		■	■		■
Century	■	■			■			■	■	■	■
Greenwich					■			■	■	■	■
Greyson					■			■	■	■	■
Wakefield	■	■	■	■	■	■		■	■	■	■
Andover	■	■	■	■	■	■		■	■	■	■

Door Preparation



Schlage decorative collections F Series knobs and levers

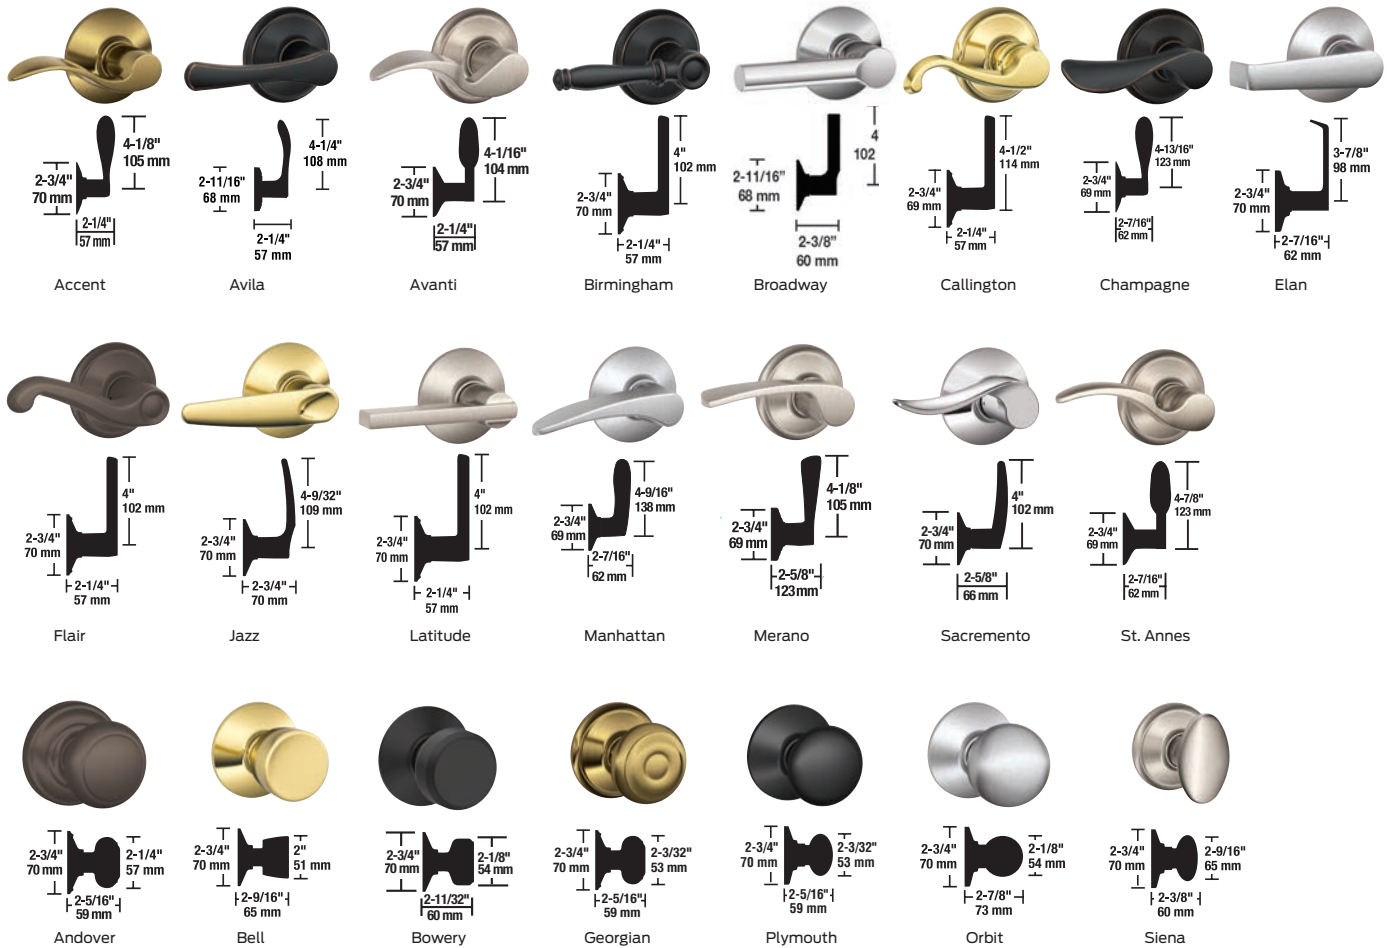

Specifications

Applications	Residential single-and multi-family use.
Certifications	ANSI A156.2, 1996, Series 4000 Grade 2. UL Listed locks for 3-hour fire doors are furnished with #10-001 T strike, 1 1/8" x 2 3/4" (29mm x 70mm), 1 1/8" (29mm) lip (also available with standard product). Assembled to order when specified with "F" suffix. Example: F51F
Exposed trim	Levers are plated to match finishes indicated.
Keying	5-pin tumbler C keyway with two keys. All F51 functions offer interior emergency exit feature.
Door range	1 3/8" to 1 3/4" (35mm to 44mm) standard.
Backset	Fits either 2 3/8" (60mm) or 2 3/4" (70mm) backset.

Standard features

- Lifetime limited mechanical and finish warranty
- Field-reversible levers on privacy, passage and keyed functions
- Key-removable outside knobs or levers for easy cylinder replacement
- Meets 400,000 cycle ANSI Grade 2 requirements
- Concealed screws on Andover-style rose


Latches and strikes

Latches: 1" x 2 1/4" (25mm x 57mm), 1/2" (13mm) throw standard. Dual option faceplates, including 1 1/8" (29mm) round corner and circular drive-in, are standard for passage and privacy functions. Square corner faceplates available.

Strikes: Full lip, 1/4" (6mm) radius corner, 1 5/8" x 2 1/4" (41mm x 57mm), 1 1/8" (29mm) lip, #10-027, standard. Optional strikes: full lip; square corner; circular drive-in, ANSI 1 1/4" x 4 7/8" (32mm x 124mm), 1 3/16" (30mm) lip. UL Listed locks are furnished with #10-001 T strike, 1 1/8" x 2 3/4" (29mm x 70mm), 1 1/8" (29mm) lip (also available with standard product).

Residential lock sets

Handleset/deadbolt design options

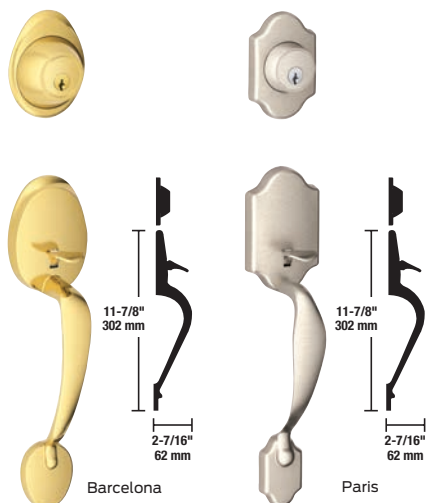

Handleset specifications

Applications	Residential single and multi-family doors.
Certifications	ANSI A156.5, 2001, Grade 3.
Exposed trim	Handlesets are solid forged brass.
Keying	Schlage C keyway with two brass keys. Locks are keyed 5-pin.
Door Range	1 ³ / ₈ " to 1 ³ / ₄ " (35mm to 44mm) standard.
Backset	Universal latch standard, fits either 2 ³ / ₈ " (60mm) or 2 ³ / ₄ " (70mm) backsets.
Warranty	Lifetime mechanical warranty, five-year finish warranty.
UL Listing	Single cylinder deadbolt/handleset available with UL Listing - box pack only.

Latches and strikes

Latches: 1" x 2¹/₄" (25 mm x 57 mm), 1/2" (13 mm) throw standard. Dual option faceplates including 1¹/₈" (29 mm) round corner and circular drive-in are standard for passage and privacy functions. Keyed functions also come with 1¹/₈" (29 mm) square corner faceplates standard, in addition to round corner and circular drive-in. 1¹/₈" (29 mm) faceplate adaptors available.

Strikes: Full lip, 1⁵/₈" x 2¹/₄" (41mm x 57mm), 1¹/₈" (29mm) lip, #10-026, standard. Optional strikes: full lip, 1/4" (6mm) radius round corner; circular drive-in, ANSI 1¹/₄" x 4⁷/₈" (32mm x 124mm), 1³/₁₆" (30mm) lip. UL Listed locks are furnished with #10-001 T strike, 1¹/₈" x 2³/₄" (29mm x 70mm), 1¹/₈" (29mm) lip (also available with standard product).



JD60
JD Series single cylinder



JD80
JD Series one-sided deadbolt



JD81
JD Series one-sided deadbolt
w/ exterior plate

Deadbolt specifications

Applications	Single family and multi-family doors.
Certification	ANSI A156.5, 2001 Grade 3.
Exposed trim	Wrought brass or bronze.
Keying	Schlage C keyway with two brass keys. Locks are keyed 5-pin.
Door range	1 ³ / ₈ " to 1 ³ / ₄ " (35mm to 44mm) standard.
Backset	Universal latch standard, fits either 2 ³ / ₈ " (60mm) or 2 ³ / ₄ " (70mm) backsets.
Warranty	Lifetime mechanical warranty, five-year finish warranty.
UL Listing	Single cylinder deadbolt product available with UL Listing - box pack only.

Finishes



Handlesets	605	609	619	620	625	630	716
Barcelona	■	■	■	■	■	■	■
Paris	■	■	■	■	■	■	■
Deadbolts							
JD60	■	■	■	■	■	■	■
JD80	■	■	■	■	■	■	■
JD81	■	■	■	■	■	■	■

See page 25 for finish samples

*Discontinued; available while supplies last


Door preparation

See templates.

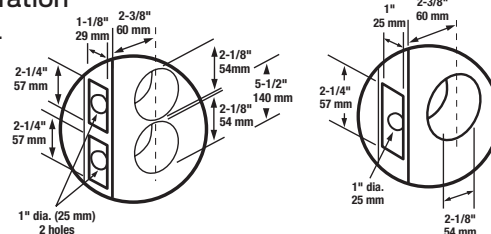

Residential lock sets

Knob/lever design options

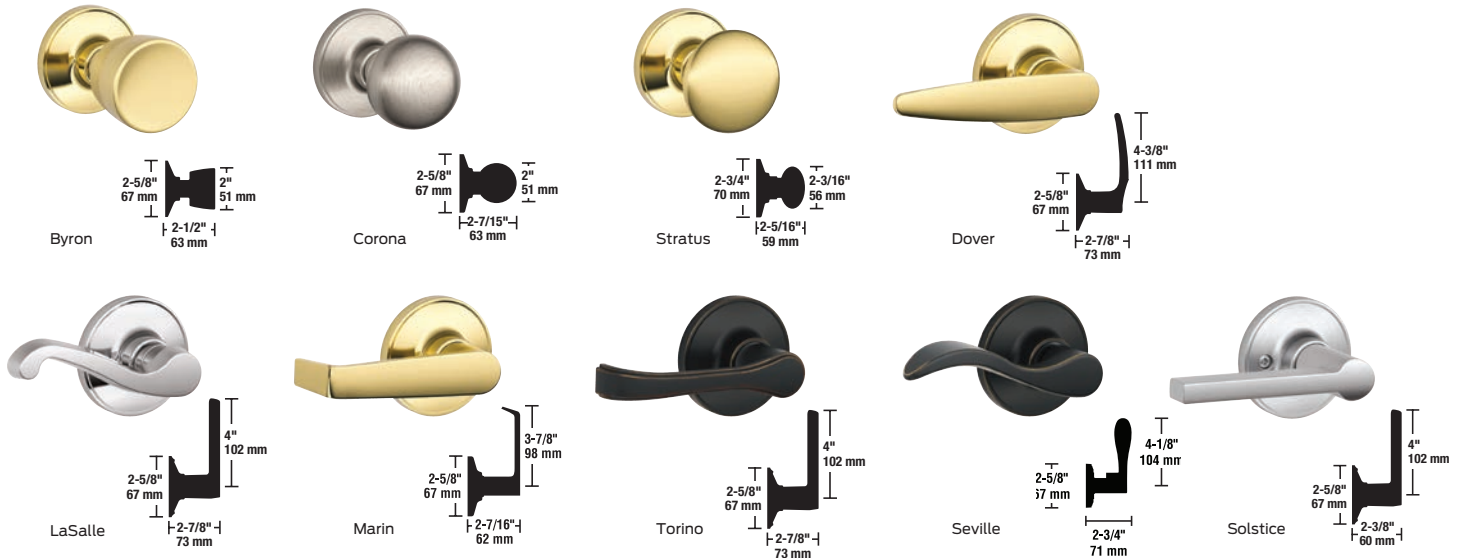

Dover, Marin and Torino lever designs are non-handed. LaSalle and Seville are reversible.

Specifications

Applications	Residential single and multi-family doors.
Certifications	ANSI A156.2, 1996, Series 4000 Grade 3.
Exposed trim	Levers are zinc-based; plated to match finishes indicated. Knobs are brass or stainless steel; plated to match finishes indicated.
Keying	5-pin tumbler Schlage C keyway with two brass keys.
Door range	1 ³ / ₈ " to 1 ³ / ₄ " (35mm to 44mm) standard.
Backset	Universal latch standard, fits either 2 ³ / ₈ " (60mm) or 2 ³ / ₄ " (70mm) backsets.
UL listing	Knobs/levers available with UL listing. Box pack only.

Finishes

Knobs	605	609	619	620	625	626	630	716
Byron	■	■					■	
Corona	■	■	■	■	■		■	■
Stratus	■	■	■		■		■	■
Dover	■	*					■	
LaSalle	■	■	■					■
Marin			■				■	
Torino	■	■	■	*	■		■	■
Seville	■	■	■		■			■
Solstice			■		■	■		■

See page 25 for finish samples

*Discontinued; available while supplies last

Standard features


- Lifetime mechanical warranty, five-year finish warranty
- Schlage C keyways can be keyed to Schlage locks for one-key convenience

Latches and strikes

Latches: 1" x 2¹/₄" (25 mm x 57 mm), 1/2" (13 mm) throw standard. Dual option faceplates, including 1¹/₈" (29 mm) round corner and circular drive-in, are standard for passage and privacy functions. Keyed functions also come with 1¹/₈" (29 mm) square corner faceplates standard, in addition to round corner and circular drive-in. 1¹/₈" (29 mm) faceplate adaptors available.

Strikes: Full lip, 1⁵/₈" x 2¹/₄" (41mm x 57mm), 1¹/₈" (29mm) lip, #10-026, standard. Optional strikes: full lip, 1/4" (6mm) radius round corner; circular drive-in, ANSI 1¹/₄" x 4⁷/₈" (32mm x 124mm), 1³/₁₆" (30mm) lip. UL Listed locks are furnished with #10-001 T strike, 1¹/₈" x 2³/₄" (29mm x 70mm), 1¹/₈" (29mm) lip (also available with standard product).

Door preparation

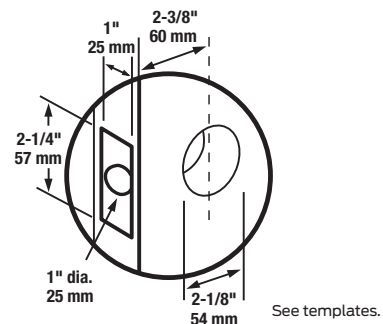

Builders hardware

Interior hardware



61 Solid door stop

- Made from aluminum or brass
- Projection: $3\frac{3}{16}$ " on aluminum units
- Finishes: A3, A5, A15, A14, A26D, A716, A-W, US3, US5, US15, US26, US26D, US716



63 Flex door stop

- Made from steel
- Projection: 3"
- Finishes: F3, F5, F15, F26D, F716



221 Flush pull

- Made from wrought brass
- Inside cup diameter: $2\frac{1}{8}$ "; overall diameter: $2\frac{7}{16}$ " depth: $\frac{7}{16}$ "
- Finishes: B3, B716, B5, B14, B15



262 and 265 manual flush bolt

- Made from solid brass
- Dimension: $6" \times \frac{3}{4}"$
- Finishes: B3, B5, B26, B26D, B716

Exterior hardware



U700 Eye viewer

- 120° angle of view
- For doors $1\frac{3}{8}"$ to $2\frac{1}{16}"$ thick
- UL Listed for use on fire door assemblies rated at 90 minutes
- Finishes: B4, B26D, B10B




U698 Eye viewer

- 190° angle of view
- For doors $1\frac{3}{8}"$ to $2\frac{1}{8}"$ thick
- U698 is UL Listed for use on fire door assemblies rated at 90 minutes
- Finishes: B3, B26, B10B

8400 — Residential grade kick plates

- .037 gauge



Finishes	Sizes
PA3	6" x 30", 6" x 34", 8" x 34"
PA619	6" x 30", 6" x 34", 8" x 34"
PA28	6" x 30", 6" x 34", 8" x 34"
PA716	6" x 30", 6" x 34", 8" x 34"



601/620 Mail slots

- 11" x 2" opening
- Finishes: B3, B5, 626, B15, B26, B716 and PA28

Builders hardware



059 Hand rail bracket

- Made from aluminum
- Base: 2 1/4" x 1 3/8"
- Finishes: A3, A5, A14, A15, A26D, A716, US3, US5, US15, US26, US26D, US716



59 Hand rail bracket

- Made from aluminum
- Brass base: 2 15/16" x 1 1/2"
- Finishes: A3, A5, A14, A15, A26D, A716, US3, US5, US15, US26, US26D, US716



436 Floor door stop

- Made from brass or aluminum
- Oval 1 3/4" x 2"
- Finishes: B3, B5, B15, B26, B26D, B716, PA3, PA5, PA14, PA15, PA92, PA716, US3, US5, US15, US26, US26D, US716



70 Hinge pin door stop

- Made from aluminum
- Removable bushings accommodate 1/4" to 5/16" diameter hinge pins
- Finishes: A3, A5, A15, A26, A26D, A716, AW, US3, US5, US15, US26, US26D, US716



07 Window lock

- Made from solid brass or aluminum
- Base: 15/16" x 2 9/16"
- Strike: 5/8" x 2 9/16"
- Finishes: aluminum-A3, A5, A14, A15, A92, AW, US3, US5, US15, US26, US26D, US716



026 Bar window lift

- Made from aluminum
- Base: 1 1/8" x 4"
- Finishes: B10B, B14, B15, aluminum-A3, A5, A14, A92, A5, A-716, US3, US5, US15, US26, US26D, US716



481 Door guard chain

- Made from brass or steel
- Meets design requirements of ANSI/BHMA A156.16
- Finishes: brass F26, F26D, F716, US3, US5, US15, US26, US26D, US716



990 Sliding door pull

- Made from aluminum or steel
- Doors 1 3/8" to 1 1/2"
- Size 1 3/4" x 2 1/4"
- Finishes: A3, A5, A15, A14, A92, A-716, F3, F5, F14, F92, F-716, US3, US5, US15, US26, US26D, US716



580 Ceiling hook

- Made from aluminum
- Base: 7/8" x 1 15/16, 2 1/4" projection
- Finishes: A3, A5, A14, A15, A26, A26D, A716



581 Single wardrobe hook

- Made from aluminum
- Base: 1 1/4" x 1/8", 1 5/8" projection
- Finishes: A3, A5, A14, A15, A26, A26D, A716, US3, US5, US15, US26, US26D, US716



582 Double wardrobe hook

- Made from aluminum
- Base: 1 1/16" x 1 1/4, 1 3/32" projection
- Finishes: A3, A5, A14, A15, A26, A26D, A716, US3, US5, US15, US26, US26D, US716



991 Sliding door lock

- Made from aluminum or steel
- Doors: 1 3/8" to 1 1/2"
- Size: 1 3/4" x 2 1/4"
- Strike: 1" x 2 1/4"
- Finishes: A3, A5, A15, A14, A92, A-716, F3, F5, F14, F92, F-716, , US3, US5, US15, US26, US26D, US716



347 Ball catch

- Made from wrought brass
- Face plate: 2 1/8" x 1"
- Strike: 2 1/8" x 1 1/16"
- Finishes: B3, B5, B15, B26, B26D, B716



349 Ball catch

- Made from wrought brass
- Face plate: 2 1/8" x 1"
- Strike: 2 1/8" x 1 3/8"
- Finishes: B3, B5, B15, B26, B26D, B716



WS407CVX Wall guard

- Made from wrought brass
- Convex rubber bumper
- Finishes: US3, US4, US5, US10, US10B, US14, US15, US26, US26D, US28, US32D



WS407CCV Wall guard

- Made from wrought brass
- Concave rubber bumper
- Finishes: US3, US4, US5, US10, US10B, US14, US15, US26, US26D, US28, US32D

About Allegion

Allegion (NYSE: ALLE) creates peace of mind by pioneering safety and security. As a \$2 billion provider of security solutions for homes and businesses, Allegion employs more than 8,000 people and sells products in more than 120 countries across the world. Allegion comprises 27 global brands, including strategic brands CISA®, Interflex®, LCN®, Schlage® and Von Duprin®. For more, visit **www.allegion.com**

aptiQ ■ LCN ■ **SCHLAGE** ■ STEELCRAFT ■ VON DUPRIN