


WRS-BF-FA-2HD Series Front Mounted Recessed Handicap Shower Panel w/(2) Fixed Shower Heads



(Unit may be shown with optional features)

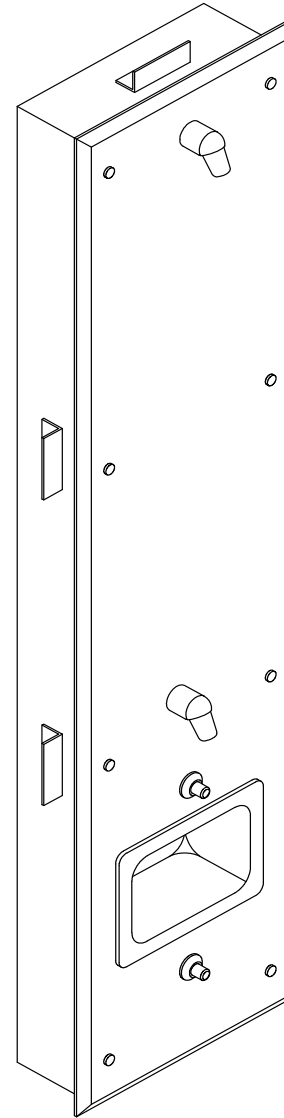

Recommended Specifications

Front Mounted, Recessed Handicap Shower Panel w/(2) Fixed Shower Heads shall be:
Willoughby Model No. **WRS-BF-FA-2HD**
(Select from model number and options list on next page)

Shower panel shall be fabricated from 14 GA, Type 304 stainless steel with exposed stainless surfaces polished to a #3 satin finish. Mounting frame shall be fabricated from 18 GA galvanized steel.

Standard equipment shall include:
- Shower valve (Select from Valve Selection options list)
- (2) (NPS) non-adjustable penel shower heads

Shower panel shall attach to mounting frame with security screws. Unit requires no chase area for installation and maintenance.

To specify fixture and accessories, use the Model Number and Options page.

Example: To specify a Front Mounted, Recessed Handicap Shower Panel w/(2) Fixed Shower Heads with single temp. pneumatic metering valves (manifolded), standard pneumatic push buttons, standard 2.5 GPM flow rate, standard (NPS) shower heads, in-line thermostatic mixing valve, and recessed mounted soap dish

Use the following Willoughby Model Number:

WRS-BF-FA-2HD-PML1-MA2-PPB-2.5GPM-NPS-TMV-RD



MODEL NUMBER AND OPTIONS:

1.) Base Model Number:

- WRS-BF-FA-2HD Front Mounted, Recessed Handicap Shower Panel w/(2) Fixed Shower Heads

2.) Valve Selection:

- NV No Valve
 PML1 Single Temp. Pneumatic Metering
 PML2 Dual Temp. Pneumatic Metering
 E1L1 Single Temp. Electronic (Pick Control)*
 E1L2 Dual Temp. Electronic (Pick Control)*

Valve Manifold Option:

Pneumatic or Electronic Valves Only:

(See the Manifold Option Page at the end of Catalog Section **S5** for further information)

- MA2

5.) Electronic Controls (Must Use Electronic Push Button):

- Pneutronic WITS WMS II

6.) Shower Head Selection:

- NPS Non-adjustable Penal Shower Heads (Standard)
 APS Adjustable Penal Shower Heads

7.) Options:

- TMV In-line Thermostatic Mixing Valve
 TF24 Transformer, 110V to 24V
 RD Recessed Mounted Soap Dish
 SD Surface Mounted Soap Dish
 Other _____
 Other _____

*(Req. 110V power through ground fault interrupter (GFCI) receptacle)

3.) Push Button Selection:


Pneumatic or Electronic Valves Only:

- PPB Pneumatic Push Buttons
 EPB Electronic Push Buttons*
 PZPB Piezo Push Buttons*

4.) Flow Rates:

- 2.5 GPM (Standard)
 2.0 GPM
 1.5 GPM

Approved For Manufacturing By: _____ Date: _____ Company: _____
 Wall Thickness: _____ Wall Type: _____

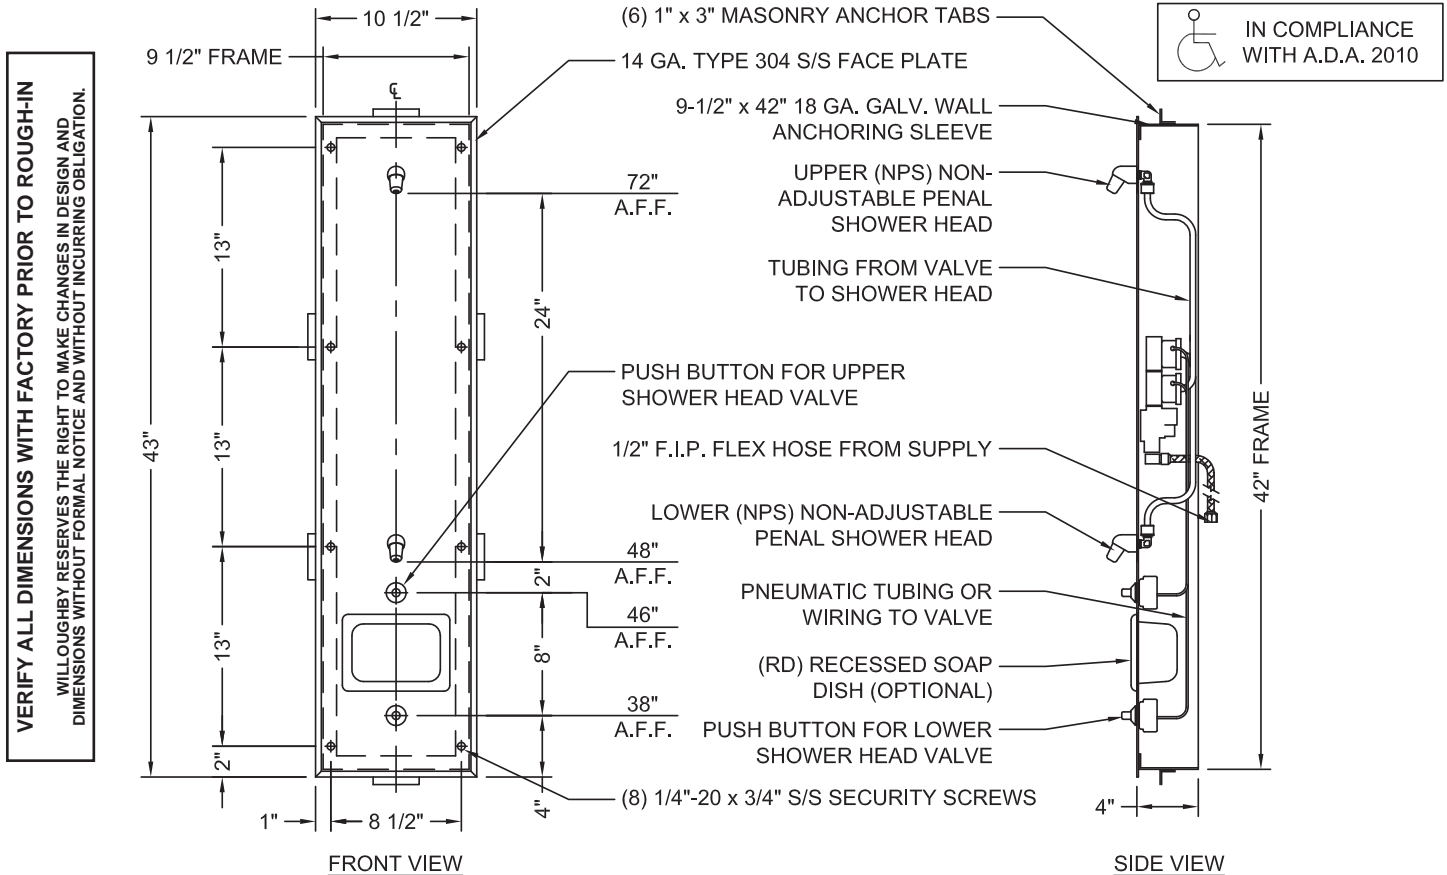

visit our website at www.willoughby-ind.com
 5105 West 78th Street • Indianapolis, IN. 46268
 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.