


DATA SHEET

Product Features

BALI® S3000™ MINI BLINDS

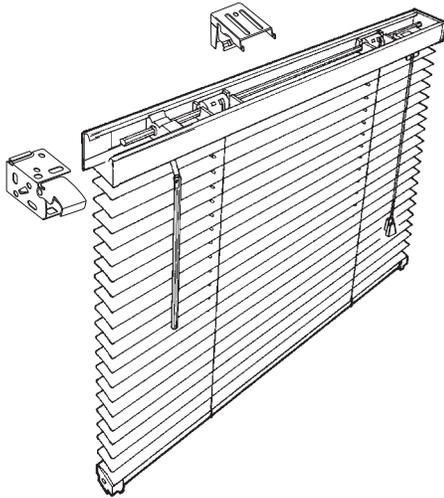

- **Integrated headrail with light blocking lip**
- **AFT delivers anti-static performance to repel dust**
- **Low HAP, low VOC paint process**
- **Snap-in hidden brackets**
- **Disengaging clutch**
- **Crash proof cord lock**
- **Enclosed bottomrail**
- **Privacy slat option**
- **Perforated slat option**
- **1/2" slat option (S4000 Micro)**
- **Box bracket option**
- **Lifetime warranty**

Product Specifications

BALI® S3000™ MINI BLINDS

Headrail shall be 1" high x 1-1/2" wide x .025" thick steel valance-free design with a curved front profile, rolled edges at the top and a light blocking lip at the lower back side. The steel finishing process includes phosphate treatment for corrosion resistance, a chrome-free sealer, a low HAP urethane primer and a topcoat of low HAP polyester baked enamel.

Tilter shall be made of injection-molded thermoplastics for smooth low-friction operation and will incorporate a clutch mechanism to prevent damage due to over tilting.

Tilt rod shall be electro-zinc coated solid steel measuring 1/4" square.

Tilt wand shall be clear polycarbonate with a hexagonal cross section measuring approximately 1/4" diameter and attached to the tilter shaft by means of a spring clip for easy removal.

Cord lock shall be metal of a snap-in design incorporating a floating, shaft-type locking pin and shall incorporate a crash proof safety feature that will lock blind automatically upon release of cord.

Drum and cradles shall be low-friction thermoplastic and provided for each ladder.

Installation brackets shall be top loading, zinc plated steel with a snap-in design for easy installation.

Braided ladder shall be made of 100% polyester yarn incorporating two extra strength rungs per ladder for slat support. Standard ladder spacing shall be 21.5mm.

Slats shall be 5000 series cold-rolled aluminum containing the maximum allowable recycled content to produce a high strength and corrosion resistant flexible product. Slats shall be nominally 1" wide x .006" thick and processed with Advanced Finishing Technology (AFT), providing a smooth, hard, less porous surface. AFT delivers anti-static performance to repel dust. Slats shall be treated with a topcoat of polyester baked enamel.

Bottomrail shall be completely enclosed tubular shape made of phosphate-treated steel for corrosion resistance and finished with a chrome-free sealer, low HAP urethane primer and a topcoat of low HAP polyester baked enamel and shall measure .025" thick.

- Options:**
- .008 slat
 - 20mm ladder spacing
 - Perforated slat (6% openness)
 - Privacy slat with 18mm spacing
 - Tilt limiter
 - Ring tilter
 - Top lock cord lock
 - Ring pull
 - Box brackets
 - Extension brackets
 - Hold down brackets
 - Cut outs