Shower Valve Applications

Vandal Re	esistance by Valve type
Abuse	Facility Type

Abuse Level	Facility Type	HD/NAV	SV	AST/TT	EF	C5
Most	Prison	•	•	•		
↑	School	•	•	•	•	•
	Park and Rec	•	•	•	•	•
	Industrial Plant	•	•	•	•	•
	Student Housing	•			•	•
	Stadiums/Arenas	•			•	•
	Health Club	•			•	•
	Hospital	•			•	•
\downarrow	Hotel				•	•
Least	Nursing Home				•	•

● - recommended option for facility type

HD/NAV – Equa-Flo HD and Navigator EF – Equa-Flo SV – Single compression valve C5 – Equa-Flo AST/TT – Air metering valve and TouchTime

Bradley Shower Options



TouchTime in a corner wall shower



Equa-Flo HD in an ADA wall shower



Equa-Flo HD in a column shower



Equa-Flo EF in a recessed ADA wall shower



Equa-Flo C5 with a commercial showerhead



Navigator with hand shower



Air metering in a group wall shower



Equa-Flo HD in a wall shower



Shower Valves

Air Metering
Electronic Metering
Pressure Balancing
Single Compression
Thermostatic





Shower Valves

Reliable. Diverse. Stylish.

Bradley Corporation offers the most diverse assortment of shower valves and shower fixtures in the industry. These anti-scald and metering valves present a unique blend of vandal resistance, style, and function to meet all your shower room applications, including:

- Ceramic pressure balancing cartridge with no-wearing parts, providing years of reliable service
- Vandal resistant brass materials that can withstand up to 50 ft/lb of force
- Electronic metering that is not susceptible to humidity or moisture, providing reliable timing upon every activation



All of these valves can be integrated into a wide variety of shower fixtures such as column showers, wall showers, and in-wall showers. With so many choices you're guaranteed to find the right product for your next shower room project.

Electronic Metering Valve

TOUCHTIME®*

- Reliable metering of water for showers
- Electronically-controlled 60 or 180 second metering cycle
- Electronics sealed into push-button pod
- Safe low voltage
- ADA-compliant





Air Metering Valve*

- Timing from 5 to 45 seconds
- Industry exclusive valve design provides reliable metering performance
- Easily accessible for service
- ADA compliant



Single Compression Valve*

- Vandal resistant
- Single temperature on/off control



^{*} For safe showering temperatures, these valves should be supported by Bradley Navigator thermostatic mixing valves.

Commercial Pressure Balancing Valves

EQUA-FLO™ EF

- Sturdy blade handle
- Durable chrome finish
- Available for all shower configurations



EQUA-FLO C5


- Eye-catching decorative handle
- High-polished chrome finish
- Available for in-wall shower configurations



Commercial Pressure Balancing Valve Body

EQUA-FLO EF & C5


- ASSE 1016, UPC and cUPC certified
- Ceramic cartridge with no wearing parts
- Stainless steel balancing piston
- Tamper-resistant brass limit stops
- Easy installation and serviceability
- Factory assembled and tested
- Uniform casting used for all valves

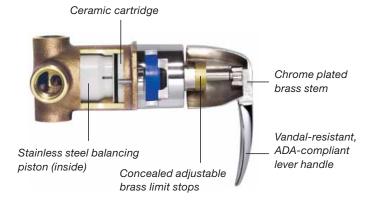

Heavy Duty Pressure Balancing Valve

EQUA-FLO HD

- ASSE 1016 certified
- Most durable and vandal-resistant valve available
- Factory assembled and tested
- Easy installation and serviceability
- Tested to withstand 50 ft/lbs of force at the handle
- Uniform casting used for all valves

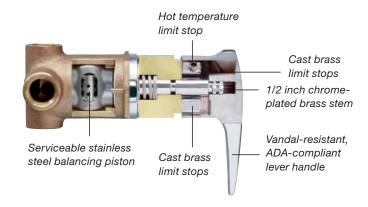

Heavy Duty Thermostatic Shower Valve

NAVIGATOR®

- ASSE 1016, UPC and cUPC certified
- Reliable wax-filled thermostat
- Adjustable set point within temperature limit
- Easy installation and serviceability
- Factory assembled and tested
- Uniform casting used for all valves

