



# Infinity™ RD (Reveal Edge for 5/8" Drywall) Engineered

## Product

### Applications

Free-floating islands, projections and transitions between ceiling heights.

### Features

- Pre-fabricated perimeter for drywall ceilings.
- Continuous reveal along outer edge.
- Two heights: 4" and 6".
- Straight sections with mitered corners.
- Integrates with standard drywall grid ceiling suspension systems.
- Accepts 5/8" gypsum panels.
- Grooved tapping flange for drywall compound and paint.
- Sturdy extruded aluminum.
- Single piece construction.

### Benefits

- Smooth monolithic surface with fewer visible lines.
- Ease of installation compared to drywall framing.
- Engineered to project specifications
- Exceptional adhesion to joint compound and paint.
- Sustainable: 75%-100% post consumer recycled content, 100% locally recyclable.

### Material:

Extruded aluminum primed on outer surface.

### Components:

1. **Trim:** Straight with square cut or mitered ends. Includes trim, splice clips, grid clips.

#### Surface Primed

Outside only

#### Straight

04671S (4" H = 3-13/16")       04672S (6" H = 5-13/16")


2. **Splice Plate:** Joins trim.

414.00 Straight       417.00 Inside corner (vertical)       429.00 Outside corner (vertical)


3. **Grid Clip (2 parts):** Joins grid to trim.

430.00


### Profile

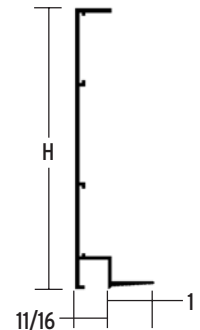

### Sections

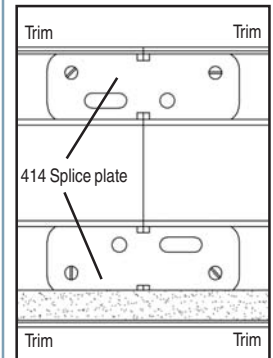


### Splice

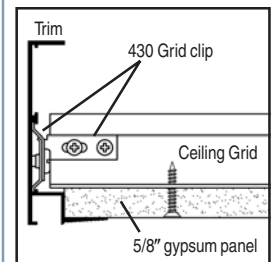

Drywall grid to trim (gypsum panel by others)


### Reflected Ceiling Plan Example

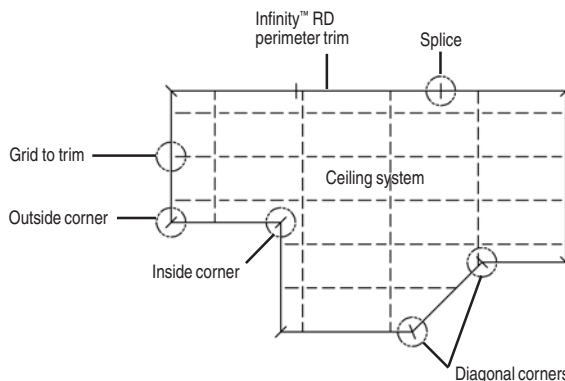

M  
METAL

Infinity™ RD (Reveal Edge for 5/8" Drywall) Engineered

Details

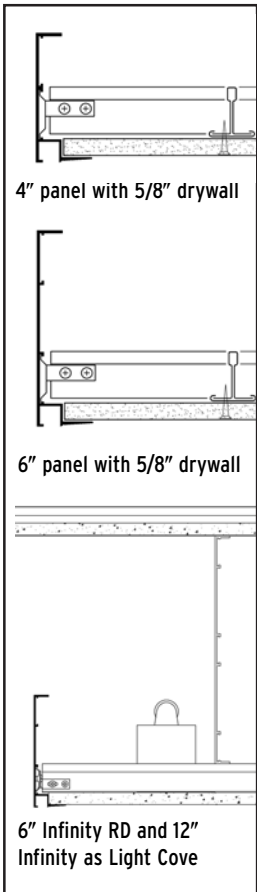

Physical Data

MATERIAL:	Extruded aluminum
SURFACE:	Smooth, primed on outer surface
SIZE:	Depths: 4", 6"
FIRE:	Class A: flame 0, smoke 0 per ASTM E-84
PERFORMANCE:	Interior applications
SUSPENSION:	Drywall grid
CLASSIFICATION:	Type XX, pattern C, G per ASTM E 1264
WARRANTY:	1 year limited
SUSTAINABILITY:	75% - 100% recycled content, 100% locally recyclable,

