

#### 09 30 00.11/BOS BuyLine 1107



- Waterproofing
- Crack Isolation
  - Patches & Underlayments



• Mortars



- Grouts
- Epoxies



- Adhesives
- Caulks & Sealants

Product information also available at:



www.bostik-us.com

### PRODUCT SELECTION CHART

PRODUCT NAME	DESCRIPTION	TILE TYPES	SUBSTRATES	SPECIFICATION	PAGE
SURFACE PREPARATION SY	ISTEMS				3-5
SL-150	Self-Leveling Underlayment	N/A	1,2,4,5,7		3
SL-155 Fast Set	Self-Leveling Underlayment	N/A	1,2,4,5,7		3
Fast Patch 102	Fast Setting Feather to 1/2"	N/A	1,2,4,5,6,7		3
Natural Cork	1/4" Sound Deadening			ISO-R-140	
				Standard for IIC	
		N/A	1,2,4	Requirements	3
Bostik - Universal Primer			1,2,4,5		3
Ultra-Set Advanced (low odor)	Waterproofing & Crack				
	Isolation Membrane	ABCDEFGH	1,2,3,4,5,6,7,8	ANSI A118.10	4
Gold	Waterproofing & Crack				
	Isolation Membrane	N/A	1,2,3,4,5	ANSI A118.10	5
Black-Top 90210	Waterproofing & Crack				
	Isolation Membrane	N/A	1,2,3,4,5,6,7	ANSI A118.10	5
MORTARS & THIN-SETS					6-7
ReFlex	High Performance, Flexible	ABCDEFH	1,2,3,4,5,6,7	A118.4 & A118.11	6
Single-Flex F.S.	Fast Setting, Latex Thin-Set	ABCDEFH	1,2,3,4,5,6,7	A118.4 & A118.11	6
Single-Flex	Premium Multi-Purpose	THEODELITI	1,2,5,1,5,0,1	71110. j @ 71110.11	0
onge-riex	Latex Thin-Set	ABCDEFH	1,2,3,4,5,6,7	A118.4 & A118.11	6
Big Tile & Stone	Premium Latex Medium	THEODEITT	1,2,5,1,5,0,1	71110. j @ 71110.11	0
big file & stolle	Bed Mortar	ABCDEFH	1,2,3,4,5,6,7	A118.4 & A118.11	6
DitraSet Thin-Set Mortar	Premium Portland Cement	Mbeblin	1,2,5,1,5,0,1	A118.1,	0
DitiaSet Thin-Set Mortai	Thin-Set Mortar	ABCDEFH	1,2,3,4,5,6,7	(A118.4 & A118.11)*	7
Hydroment PM	General Purpose, Latex Thin-Set	ABCDEFH	1,2,3,4,5,6,7	A118.4 &A118.11	6
Porcelain-Mate	Thin-Set Mortar	ABCDEFH	2,4	A118.1 & A118.4	7
Tile-Mate Premium	Premium Portland Cement	ADODENT	2,7	A118.1,	(
me-mate riemum	Thin-Set Mortar	ABCDEFH	1,2,3,4,5,6,7	(A118.4 & A118.11)*	7
Hot Weather Mix	Premium Portland Cement	ADODENT	1,2,3,7,3,0,7	A118.1	(
flot weather Mix	for Hot & Dry Environments	ABCEFH	1,2,3,4,5,6,7	(A118.4 & A118.11)*	7
	Portland Cement	ADCEITI	1,2,3,7,3,0,7	A118.1,	(
The-Mate Floor & Wall	Thin-Set	ABCDEFH	1,2,3,4,5,6,7	(A118.4 & A118.11)*	7
	*mixed with 425 Multi-Purpose Acrylic Late			(1110.) @ /1110.11)	
ADMIXTURES	mixed with 425 Middler arpose Act you Law	ex rumixture of 447 The.	x-7 I-Lusiic		8
				4110 4 4110 4	0
425 Multi-Purpose Acrylic	Acrylic Admixture for Cement	ADODEEU	1224565	A118.4, A118.6,	0
Latex Admixture	Grout, Thin-Set, Mortarbeds & Priming	ABCDEFH	1,2,3,4,5,6,7	A118.7 & A118.11	8
447 Flex-A-Lastic Flexible	High Performance				
Mortar Admixture	Flexible Admixture	ADODEEU	1224565	A 110 4 8 A 110 11	0
MASTICS (ORGANIC ADHI	for Tile-Mate Thin-Sets	ABCDEFH	1,2,3,4,5,6,7	A118.4 & A118.11	8
					9
Hydroment Ultra-Premium Mastic	Interior Applications, Walls, Ceilings,				
	Floors & Countertops	ABCDFH	1,2,3,4,5	A136.1 Type 1 & 11	9
Hydroment Multi-Purpose Mastic	Interior Applications, Walls, Ceilings,				
	Floors & Countertops	ABCDF	1,2,3,4,5	A136.1 Type 1 & 11	9
Hydroment Professional Grade Mastic	Interior Applications, Walls, Ceilings,				
	Floors & Countertops	ABCDF	1,2,3,4,5	A136.1 Type 1 & 11	9
GROUTS					10-11
Hydroment Ceramic Tile Grout	Portland Cement Grout				
(sanded)	1/8" to 1 1/2"	ABCDEFGH	N/A	A118.6 & A118.7 **	10
Hydroment Dry Tile Grout	Portland Cement Grout				
(unsanded)	1/8" or less	ABCDEFGH	N/A	A118.6 & A118.7**	10
Hydroment 100% Solids Epoxy	Non-Staining Chemical Resistant				
Grout and Mortar	100% Solids Epoxy Grout	ABCDEFGH	N/A	A118.3	10
	**mixed with 425 Multi-Purpose Acrylic La	utex Admixture			
TILE TYPES		SUBSTRATES			
A Non-Vitreous	G Moisture Sensitive Stone	1 Plywood	6	Properly Prepared Vin	yl/
B Semi-Vitreous	(i.e. Russo LeVanto and	2 Concrete		VCT Tile	
C Vitreous	Nero Marquina Marble or Green Marble and	3 Gypsum Wallbo			
<ul><li>D Impervious/Porcelain</li><li>E White Translucent Marbles</li></ul>	their Agglomerates)	4 Cementitious B 5 Properly Prepare		(interior – dry only) Clean Steel	
F Granite, Stable Stones, Slate	H Large Ceramic Tile, Stable	Ceramic Tile		Cicui Oteei	
	Stone and Granite				

### PATCHES/UNDERLAYMENTS

09 30 00.11/BOS BuyLine 1107



#### SL-150<sup>™</sup>

SL-150 is a high compressive strength, self-leveling, cement-based underlayment used to repair, smooth and level concrete as well as existing ceramic, terrazzo or approved plywood sub-floors

prior to the installation of carpet, vinyl, VCT, laminate, solid and engineered hardwood flooring, ceramic or natural stone. SL-150 is suitable for thickness from featheredge to 1" thick; or up to 5" thick when mixed as designed with pea gravel. Use on, above or below grade. Use SL-150 in smaller installations where it may be mixed by hand; or use underlayment pump to quickly cover large jobs. Mix with water. Prime all surfaces with Bostik Universal Primer.

Available in 50 lb. bags.



#### SL-155<sup>™</sup> FAST SET

SL-155 FAST SET is a high compressive strength, self-leveling, cement based underlayment used to repair, smooth and level concrete as well as existing ceramic, terrazzo or approved plywood

sub-floors prior to the installation of carpet, vinyl, VCT, laminate, solid and engineered hardwood flooring, ceramic or natural stone. SL-155 FAST SET is suitable for thickness from featheredge to 1" thick; or up to 5" thick when mixed as designed with pea gravel. Use on, above or below grade. Use

SL-155 FAST SET in smaller installations where it may be mixed by hand; or use underlayment pump to quickly cover large jobs.

Mix with water. Prime all surfaces with Bostik Universal Primer.



#### FAST PATCH 102<sup>™</sup>

Fast Patch 102 is a fast setting, high performance, polymer-modified cement-based patch used to repair holes, cracks, and uneven surfaces from feather edge to 1/2" thick.

Mix with water. May require priming with 425 Multi-Purpose Acrylic Latex Admixture.

Available in 25 lb. bags.

#### NATURAL CORK SOUND CONTROL UNDERLAYMENT

1/4" thick rolled cork underlayment provides a sound barrier for all types of tile and stone flooring. Install Natural Cork with a Hydroment mastic. Set tile over the underlayment with a Hydroment latex-modified thin-set mortar. This system offers a single source warranty!



#### **UNIVERSAL PRIMER**

Universal Primer is designed for use with Hydroment SL-150<sup>™</sup> Self Leveling Underlayment and all Self Leveling Underlayments. Use Universal Primer over concrete, approved

plywood substrates; cement backer board, existing ceramic tile, marble, granite, and terrazzo or cut back adhesive residues.

Available in 5 gal. and 1 gal. containers.

TYPICAL PHYSICAL PROPERTIES								
PRODUCT	SET TIME	COMPRESSIVE STRENGTH	MAX Depth					
SL-150	2 hours	5500 psi	1"*					
SL-155	1.5 hours	5500 psi	1"*					
Fast Patch 102	2 hours	4900 psi	1/2"					
		* 5" with	bea gravel.					


Available in 50 lb. bags.

Here are just a few of the places you'll find Hydroment® products at work...

Best Western Hotels Epcot Center Holiday Inns J.C. Penny McDonald's Restaurants Sears & Roebuck Co. Texaco United Nations Plaza Burger King The Gap Clothing Stores Hyatt Regency Hotels Macy's Neiman-Marcus Stores Shell Oil Co. T.G.I. Friday's Wendy's Outback Steakhouse Applebee's Target Walmart Lowes Menards Wells Fargo Bank of America Coca-Cola Bottling Cos. Hilton Hotels IBM Corporations Proctor & Gamble Co. Taco Bell Trump Tower William Sonoma Stores Kaufman's Lord & Taylor Kohl's Cleveland Brown's Stadium Marriott Hotels Angels Stadium Newark International Airport Ohio Stadium Bank One Headquarters AT CHES/UNDERLAYMENTS

### WATERPROOFING &

#### WATERPROOFING MEMBRANE

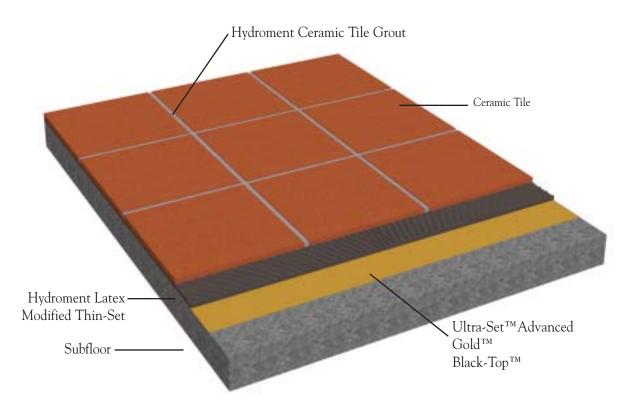



#### ULTRA-SET<sup>®</sup> ADVANCED

U l t r a - S e t Advanced low odor, single-component, trowel applied moisture curing urethanes used as waterproofing

and crack isolation membranes.

Hydroment Ultra-Set Advanced exceeds the requirements of ANSI A118.10 and carries the seal of the Uniform Plumbing Code.

No mixing required. Apply 30 mils thick with a 3/16 x 5/32 V-notch (mastic) trowel. Install tile over the cured membrane with a Hydroment latex modified thin-set.

Use Ultra-Set Advanced to waterproof tilework in showers, commercial kitchens, fountains, hospitals, schools, etc.

Use Ultra-Set Advanced to prevent cracks from damaging thin-set stone and tile installations. Ultra-Set Advanced may also be used to isolate the movement caused by radiant heat. Ultra-Set Advanced is also suitable for use over poured gypsum underlayments such as Gypcrete, Maxxon or Hacker to provide a suitable surface for ceramic tile or stone.

Ultra-Set Advanced may also be used as a specialty adhesive for metal, fiberglass, or laminated substrates.

Ultra-Set Advanced is available in 5 gal. containers.

# Where Ultra-Set Advanced has been performing for over a decade...

Holiday Inns McDonald's Restaurants Steak & Ale Restaurants Hyatt Regency Hotels Ohio State University The Transamerica Building Mariott Courtyards Tysons Corner Mall Vons Groceries Disney World T.G.I. Friday's Applebee's

## CRACK ISOLATION SYSTEMS

09 30 00.11/BOS BuyLine 1107



#### **GOLD**<sup>™</sup>

Gold<sup>TM</sup> is a ready to use, latex waterproofing and anti-fracture membrane for use beneath thin-set ceramic tile installations on vertical and horizontal surfaces.

Gold exceeds the requirements of ANSI A118.10 (specification for waterproof membranes beneath thin set tile and stone) and the proposed ANSI A118 specification for crack isolation membranes.


Use Gold in commercial or residential applications. Apply over concrete, cement block walls, cement backer board, gypsum board, exterior grade plywood (interior, dry installations only) and mortar beds.

Available in 3.5 and 1 gallon containers.

- Dries in 1-3 hours
- Cleans up with water

### AS A CRACK ISOLATION MEMBRANE Hydroment Ceramic Tile Grout Ceramic Tile Ceramic Tile Ceramic Tile Cack Ultra-Set<sup>TM</sup> Advanced Gold<sup>TM</sup>

#### SHOWER DRAIN DETAIL WITH STANDARD CEMENT PREFLOAT

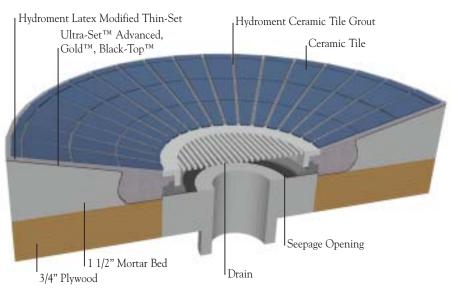

Black-Top™



#### **BLACK-TOP<sup>™</sup> 90210**

A liquid applied, fabric-reinforced waterproofing and crack isolation membrane. Black-Top 90210 may be used for both heavy duty and residential applications.

Use in commercial kitchens, pools, showers, fountains, spas, hospitals, schools, malls, airports, etc.

Applies as easy as paint. Dries in 2-4 hours. minimal thickness does not add elevation. Exceeds the requirements of ANSI A118.10.

Available in 1 gal. and 6 gal. containers.

### MORTARS & THIN-SETS



#### **REFLEX®**

(718 white/918gray)

Use ReFlex for the toughest residential and commercial applications, deflection up to 1/240, difficult tile such as porcelain, or for any job that requires an extremely high performance thin-set.

ReFlex is suitable for setting porcelain, ceramic and stone tile in both interior and exterior applications. ReFlex is recommended for installing tile over plywood, backer board and approved waterproofing/crack isolation membranes and existing ceramic and vinyl flooring. Mix with water only.

Available in 50 lb. bags.



#### SINGLE-FLEX<sup>™</sup> F.S.<sup>™</sup> (FAST SETTING)

(913white/973gray)

Single-Flex F.S. is a rapid setting, multi-purpose latex modified thin-set mortar. For added convenience, Single-Flex F.S. is available in 25 & 50 lb. bags.

Use Single-Flex F.S. where there are limited downtime concerns, or to set and grout tile in the same day.

Mix Single Flex F.S. with water or 425 Multi-Purpose Acrylic Latex Admixture for improved bond strength and flexibility.

Single-Flex F.S. is suitable for setting porcelain, ceramic and stone tile in both interior and exterior applications. Single-Flex is recommended for installing tile over plywood, backer board and approved waterproofing/ crack isolation membranes and existing ceramic and vinyl flooring.

Available in 50 lb. and 25 lb. bags.



#### SINGLE-FLEX<sup>™</sup>

(716 white/916gray)

Single-Flex is suitable for setting porcelain, ceramic and stone tile in both interior and exterior applications. Single-Flex is recommended for installing tile over plywood, backer board and

approved waterproofing/crack isolation membranes, as well as existing ceramic and vinyl flooring. Mix with water only.

Available in 50 lb. bags.



#### **BIG TILE & STONE<sup>™</sup> MORTAR**

(911 white/966 gray)

Big Tile and Stone is a latex-modified medium bed mortar designed for setting large floor tile. Big Tile and Stone is formulated to fill in uneven surfaces from 1/8" to 3/4"

beneath the tile, minimizing lippage between tiles. Big Tile and Stone also contains surface-active agents to provide maximum transfer between the mortar and tile.

Big Tile and Stone is suitable for setting porcelain, ceramic and stone tile in both interior and exterior applications. Big Tile and Stone is recommended for installing tile over plywood, backer board and approved waterproofing/crack isolation membranes and over existing ceramic and vinyl flooring.

Available in 50 lb. bags.



#### HYDROMENT PM<sup>™</sup>

(717 white/ 917 gray)

Polymer-modified thin-set mortar is suitable for setting porcelain, ceramic and stone tile in both interior and exterior applications. Hydroment PM is recommended for installing tile over

plywood, backer board and approved waterproofing/ crack isolation membranes as well as existing ceramic and vinyl flooring.

Available	in	50	lb.	bags

TYPICAL PHYSICAL PROPERTIES									
	ReFlex™	Single-Flex F.S.™ w/425	Single-Flex F.S.™ w/water	Single-Flex™	Big Tile & Stone™	Hydroment PM™			
Final Set 28 day Shear Strength	10-15 hours	60-90 min.	60-90 min.	15 hours	10-15 hours	15 hours			
• Porcelain Tile • Glazed Wall Tile	576 psi. 560 psi.	575 psi. 525 psi.	490 psi. 500 psi.	450 psi. 450 psi.	375 psi. 557 psi.	400 psi. 443 psi.			
•Quarry Tile •Quarry Tile/Wood	425 psi. 300 psi.	450 psi. 260 psi.	400 psi. 250 psi.	440 psi. 250 psi.	300 psi. 250 psi.	300 psi. 200 psi.			
28 day Compressive Strength	3600 psi.	3166 psi.	3100 psi.	3450 psi.	3400 psi.	3000 psi.			



#### **PORCELAIN-MATE**<sup>™</sup>

Porcelain Mate is for setting all types of ceramic, porcelain, granite, slate, marble, limestone, and dimension stone tiles. Use over properly prepared concrete, cement backer board, cured mortar beds, brick and cement block.

Available in 50 lb. bags.



#### TILE-MATE<sup>®</sup> PREMIUM

(710 white/760 gray)

Tile-Mate is a premium dual-purpose Portland cement thin-set mortar. Tile-Mate may be mixed with water for traditional masonry substrates for setting ceramic tile and natural stone in interior applications.

Mix Tile-Mate with 425 Multi-Purpose Acrylic Latex Admixture or 447 Flex-A-Lastic for exterior installations, porcelain tile, applications over plywood, cement board and approved waterproofing/crack isolation membranes, as well as existing ceramic and vinyl flooring.

Hydroment Ceramic Tile Grout

Available in 50 lb. bags.



#### DITRASET<sup>™</sup> THIN-SET MORTAR

DitraSet is composed of select, proprietary chemicals, carefully graded aggregates, inorganic adhesion promoters and purified cements. It provides outstanding workability, excellent durability, and superior bond strengths in exterior applications when used in

interior and

conjunction with Schluter-DITRA uncoupling membrane over substrates approved by Schluter Systems and to set ceramic, porcelain and stone tile of Schluter-DITRA.

Available in 50 lb. bags.

#### TILE-MATE<sup>®</sup> FLOOR & WALL



(712 white/762 gray) A dual purpose Portland cement mortar. Available in 50 lb. bags.

#### HOT WEATHER MIX<sup>™</sup>

DitraSet<sup>™</sup> Thin-Set Mortar

#### (715 white)

Designed for dry high temperature environments, Hot Weather Mix contains additional water retaining additives to prevent skinning in dry, hot climates. Mix with water. Not for porcelain tile or non-masonry substrates. (West Coast Only)

> — DitraSet™ Thin-Set Mortar

Double – Layer Exterior Grade Plywood

Ceramic Tile

Schluter-DITRA Membrane

TYPICAL PHYSICAL PROPERTIES								
	Porcelain-Mate™ w/water	Tile-Mate Premium™ w/447	Tile-Mate Premium™ w/425	Tile-Mate Premium™ w/water	Tile-Mate Floor/Wall w/447	Tile-Mate Floor/Wall w/425	Tile-Mate Floor/Wall w/water	
Final Set Shear Strength	12 hours	9-12 hours	9 hours	12 hours	9-12 hours	9 hours	12 hours	
•Porcelain Tile •Glazed Wall Tile •Quarry Tile •Quarry Tile/Wood	250 psi. 300 psi. 225 psi. N/A	490 psi. 615 psi. 450 psi. 200 psi.	470 psi. 504 psi. 370 psi. 175 psi.	200 psi. 300 psi. 225 psi. N/A	450 psi. 575 psi. 400 psi. 200 psi.	420 psi. 500 psi. 350 psi. 175 psi.	200 psi. 280 psi. 215 psi. N/A	
Compressive Strength	3200 psi.	3200 psi.	3300 psi.	3200 psi.	3200 psi.	3300 psi.	3100 psi.	

**RTARS & THIN-SETS** 

### ADMIXTURES



#### 425 MULTI-PURPOSE ACRYLIC LATEX ADMIXTURE<sup>™</sup>

This admixture is a versatile high solids acrylic emulsion with five primary applications.

Grout Admixture Thin-Set Admixture Mortar Bed Admixture Bond Coat Admixture

425 Multi-Purpose Acrylic Latex Admixture may be mixed with Hydroment Ceramic Tile Grout to comply with ANSI 118.6 and ANSI 118.7 requirements. When mixed with grout, 425 Multi- Purpose Acrylic Latex controls the cure rate, producing excellent physical strengths, flexibility, and color uniformity. The addition of 425 Multi-Purpose Acrylic Latex Admixture to grout helps minimize cracking in wood framed structures and helps reduce staining because it lowers the porosity of the grout.

When mixed with Tile-Mate thin-set mortars, 425 Multi-Purpose Acrylic Latex Admixture exceeds the requirements of both ANSI A118.4 and ANSI A118.11. Use over plywood, existing vinyl or ceramic flooring, and exterior installations subject to moisture and freezing.

Use 425 Multi-Purpose Acrylic Latex Admixture instead of water for preparing mortar beds and bond coats in traditional thick bed applications to improve water resistance and durability.



#### 447 FLEX-A-LASTIC<sup>®</sup>, FLEXIBLE MORTAR ADMIXTURE

This admixture is an extremely high solids, high-performance acrylic emulsion designed to be mixed full strength with Tile-Mate thin-set mortars. Use

447 Flex-A-Lastic wherever maximum performance is desired. Use over difficult, non-traditional substrates, existing vinyl or ceramic flooring, exterior installations subject to moisture and freezing, and floors with deflection up to 1/240. The tacky consistency of Flex-A-Lastic is excellent for setting large wall tile as well.

When mixed with Tile-Mate thin-set mortars, Flex-A-Lastic exceeds the requirements of ANSI A118.4 and ANSI A118.11.

Available in 5 gal. and 2 gal. containers.



8

### MASTICS (ORGANIC ADHESIVES)

09 30 00.11/BOS BuyLine 1107



#### HYDROMENT ULTRA-PREMIUM<sup>™</sup> MASTIC

Ultra-Premium high performance mastic for interior installations of ceramic, porcelain and stone tiles. Hydroment Ultra-Premium is ready to use and provides

excellent vertical grab for large body wall tile.

Ultra-Premium Mastic exceeds the requirements of ANSI A136.1 (Type 1) mastics. Hydroment Ultra-Premium mastic may be used over concrete, cement block, cement backer board, Dens Shield, gypsum wallboard, veneer plaster, Hydroment Ultra-Set, Black-Top 90210 and Gold membranes.

Available in 3.5 gal., 1 gal., and quart containers.



#### HYDROMENT MULTI-PURPOSE<sup>™</sup> MASTIC

A multi-purpose mastic for interior installations of ceramic, porcelain and stone tiles. Hydroment Multi-Purpose is ready to use and provides excellent vertical grab.

Hydroment Multi-Purpose

exceeds the requirements of ANSI A136.1 (Type 1) mastics. Hydroment Multi-Purpose may be used over concrete, cement block, cement backer board, Dens Shield, gypsum wallboard, veneer plaster, Hydroment Ultra-Set, Black-Top 90210 and Gold membranes.

Available in 3.5 gal. and 1 gal. containers.



#### HYDROMENT PROFESSIONAL GRADE<sup>™</sup> MASTIC

Hydroment Professional Grade Mastic exceeds the requirements of ANSI A136.1 (Type 1 & 2) mastics. Hydroment Professional Grade can be used over

concrete, cement block, cement backer board, Dens Shield, gypsum wallboard, veneer plaster.

Available in 3.5 gal. and 1 gal. containers.



9

**IASTICS** 



HYDROMENT<sup>®</sup> CERAMIC TILE GROUT (SANDED)

Hydroment Ceramic Tile Grout is a proven blend of quartz aggregates, specialty cements and colorfast pigments. Hydroment Grouts are available in 46 colors.

Use Hydroment Ceramic Tile Grouts for grouting ceramic tile, porcelain tile, quarry tile, brick pavers, slate, marble, granite and structural glazed block from 1/8" to

1 1/2". Hydroment Ceramic Tile Grout may be used for interior or exterior applications

Hydroment Ceramic Tile Grout meets the requirements of ANSI A118.6 mixed with water and A118.7 mixed with 425 Multi Purpose Latex Admixture.

C.T.G. TYPICAL PHYSICAL PROPERTIES								
1 hour								
1-3 hours 3-8 hours								
ngth								
t 3500 psi) 3500 psi								
4000 psi 5000 psi								

Available in 50 lb., 25 lb. and 9 lb. bags.



#### HYDROMENT<sup>®</sup> DRY TILE GROUT (UNSANDED)

Dry tile grout is a proven blend of quartz aggregates and specialty cements and colorfast pigments.

Use Dry Tile Grout where joints are less than or equal to 1/8" wide. Dry tile grout is ideal for grouting ceramic tile, porcelain tile, marble and granite.

Available in 25 lb. (selective colors) and 5 lb. bags.



#### **HYDROMENT 100% SOLIDS EPOXY GROUT & MORTAR**

Used for interior or exterior, vertical or horizontal installations. Typical applications include commercial kitchens, lobbies, bathrooms, fast food restaurants, breweries, dairies, wineries, factories, shopping malls, meat processors, and distilleries.

As a Mortar: Suitable bonding mortar for interior applications only. Use to set all ceramic, quarry, porcelain, granite, slate, pre-cast Terrazo, dimension stone tiles and moisture sensitive stone. Use over properly prepared concrete; structurally sound exterior grade plywood (interior/dry use only); cementitious backer board; Hydroment Gold, UltraSet Advanced, Black-Top 90210 and existing well bonded vinyl/VCT or ceramic tile. As bonding mortar, Hydroment Epoxy Mortar & Grout should be for interior use only.

As a Grout: Use to grout all ceramic, quarry, porcelain, granite, slate, and pre-cast Terrazo, dimension stone tiles, in joints from 1/16" to 1/2" wide.

The Hydroment Grout Selector Card is the standard for color selection, manufacturing, and quality control. Colors may vary due to jobsite conditions, absorption of tile, mixing ratios, or installation methods or from batch to batch and therefore may vary significantly from Grout Selector Card.



### White HIS2 Astural 11146 ed Beiger H148 Flash Walnut, H141 Char-Black HI35

**19 NEW COLORS** 

Drick	H136
Tenne	HISI
Prenties & Center	
Summer Wheat	H150
C Late	H192
Shadow	H196
Bamboe	HIT
Cashnere	H178
Designe	r Serie
Classic Bone	H150
Alexandream Ale	
Partabella	
Ivery Palata	H185
(I)ahi	
Sand Dame	
Aimanit	+11-1.1
C See	
Myst	H165

Ice Blue H181

Bright White H177

**Regency Series** 

Blass 16191

Willght H193

Schright Blue H172

s Green H175 ion Bard Hillin

	2			
	1			
	٩.			

Please refer to Grout Selector Card for color selection.

CeramaSeal®	Cantera	Granite, Honed	Granite, Polished	Granite, Textured	Limestone, Honed	Limestone, Polished	Limestone, Textured	Marble, Honed	Marble, Polished	Onyx	Sandstone	Slate	Soapstone	Tavertine	TILE/GROUT	Brick Paver	Cement Grout	Cement Tile	Glazed Tile	Porcelain Paver	Saltillo Tile	Terra Cotta
CLEANERS																						
Acidic Cleaner		✓	✓	<ul> <li>Image: A start of the start of</li></ul>							~	✓				✓	X	X		✓	✓	1
Alkaline Cleaner	✓	1	1	✓	✓	1	1	1	1	✓	✓	✓	1	1		✓	✓	✓	~	1	✓	1
Hydroclean	~	1	1	1	✓		1	1		1	✓	~	1	~		✓	✓	1	~	1	1	~
Stone Soap	~	~		X	<		1	1		~	<	~	~	1		<	<	~		~	<	~
Tile & Stone Cleaner	~	1	~	~	~	1	1	1	1	~	~	~	1	1		~	✓	1	~	~	✓	~
SEALERS/REPELLENTS																						
Grout & Tile Sealer																	✓					
Magic Seal	~	~	1																	x	1	
			v	1	✓	1	1	$\checkmark$	1	✓	~	✓		$\checkmark$		X	✓	X		<b>^</b>		<b>v</b>
Marble Sealer		×		✓ ×	✓ ×	✓ ✓	✓ ×	✓ ✓	✓ ✓	<ul> <li></li> <li></li> </ul>	<ul> <li></li> <li></li> </ul>	✓ ×		✓ X		×	✓ 	×		^		•
Marble Sealer Silox 8	✓	× ✓					-									× ×	<ul> <li></li> <li></li> </ul>	×			<ul> <li>✓</li> </ul>	✓ ✓
	\ \ \		×	×	×	<ul> <li>Image: A start of the start of</li></ul>	×	1	✓	✓		×		X								
Silox 8		✓ ✓	×	×	× ✓	<ul> <li>Image: A start of the start of</li></ul>	×	✓ ✓	✓	<ul> <li></li> <li></li> </ul>		×		× ✓		×	Image: A state of the state	×				
Silox 8 Siloxane 220 <b>POLISHES/SPECIALTY</b>		✓ ✓	×	×	× ✓	<ul> <li>Image: A start of the start of</li></ul>	×	✓ ✓	✓	<ul> <li></li> <li></li> </ul>		×		× ✓		×	Image: A state of the state	×				

09 30 00.11/BOS BuyLine 1107

111

11

✓ Recommended

XX

✓ X

Quarry Polish

**✗** May use, in some cases



All Bostik warranties require applicable ANSI A108 specifications are followed along with the proper procedures outlined in Bostik most recently published literature for surface preparation, setting and grouting.

In the event of breach of warranty, Bostik will pay for replacement of tile, labor and related finishing materials on a square foot basis only on the portion of the installation that is proven to be defective. This payment is to include all reasonable materials and labor. Bostik is not responsible for workmanship not in accordance with Bostik most recently published literature or damages due to hydrostatic head. This warranty does not cover industrial applications subject to chemical and mechanical abuse or improper selection of tile. Bostik is not liable for damage caused by excessive structural movement; natural disasters such as earthquakes, fires, floods, and hurricanes; or for losses due to delays or any consequential damages.

25 Year	Substrate Description Concrete on/above grade; or Ultra-Set Advanced waterproofing/crack isolation membrane/Black-Top 90210.	Setting Materials Single Flex F.S. mixed with #425 Multi-Purpose Admix, Tile-Mate 710/760 mixed with #447 Flex-A-Lastic, ReFlex, or Big Tile & Stone Mortar.	<b>Grouting Materials</b> Ceramic Tile Grout mixed with #425 Multi-Purpose Admix, or Hydroment 1900 Epoxy.
10 Year	Concrete/Cement Backer Units; Exterior Grade Plywood; or Gold, Ultra-Set Advanced waterproofing/crack isolation membrane.	Single Flex F.S., Single Flex, Tile-Mate 710/760 mixed with #425 or Multi-Purpose Admix.	Ceramic Tile Grout mixed with #425 Multi-Purpose Admix.
5 Year	Concrete/Cement Backer Units; Exterior Grade Plywood; or Gold, Ultra-Set Advanced waterproofing/crack isolation membrane.	Hydroment PM, Tile-Mate mixed with water, or Porcelain Mate mixed with water.	Ceramic Tile Grout mixed with water.
5 Year Wall Tile	Concrete, Cement Backer Board, Cement Block, Cement Mortar, Gypsum Board, Veneer, Plaster.	Ultra Premium Mastic. TIES ARE NOT TRANSFERABI	Ceramic Tile Grout mixed with water.

Contact Bostik Technical Service for job specific recommendations and warranties.



Boston Street, Middleton, MA 01949 Phone: (800) 7-BOSTIK (800-726-7845) or (888) 592-8558 Fax: (978) 750-7212 Technical Service: (800) 523-6530 Email: hydroment@bostik-us.com Visit our website @ www.bostik-us.com

