




FLUSH PANEL

FP10

www.dmimetals.com

FP10 PANEL PROFILE:

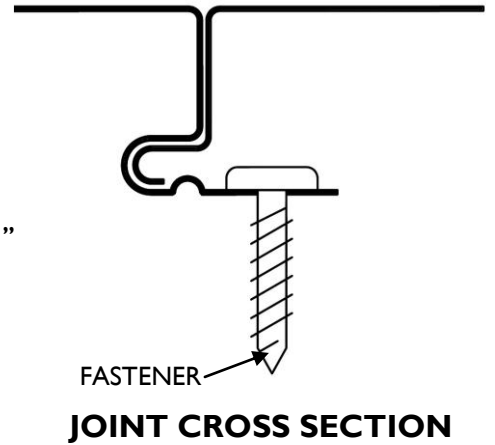

OPTIONAL STIFFENER PATTERNS:



OPTIONAL VENTING:

(.032 Aluminum Only)



FLUSH PANEL FP10 (continued)

STANDARD PRODUCT OFFERING

24 ga., 22 ga. Steel, .032 and .040 Aluminum:

<u>MODEL NO</u>	<u>SEAM ON-CENTER</u>
FPI008	8"
FPI012	12"
FPI020	20"

Custom panel widths are available. Consult DMI for costs and lead times.

PRODUCT: FLUSH-PANEL FP10 is a light structural panel system that provides a flush, aesthetic appearance upon installation. The product is an integral interlocking system by design meaning the panels install in one direction from a given starting point.

NOTE: DMI recommends a maximum panel length of 20'-0". Minimum panel length is 2'-6".

22 Ga. Steel and .040 aluminum are not stocked in all colors. Minimum order quantities and extended lead times may accompany panel orders when utilizing these substrates

Oil-canning, the slight waviness inherent with light gauge metal, does not affect the finish or structural integrity of the panel and is therefore not cause for rejection.


The flush panel is available in smooth or perforated material. DMI recommends the use of .032 Aluminum when perforating.

CONSTRUCTION ASSEMBLIES: FLUSH-PANEL FP10 may be applied over various supports including: light gauge framing, hat channels, wood stringers (each of which are to be spaced no more than 24" o.c.), or over a solid substrate.

PRODUCT USES AND APPLICATIONS: Product uses include vertical walls and fascia bands, equipment screens, and soffit.

ADVANTAGES:

1. No Panel Clips: fast and easy installation
2. Flush Seam Design: simplifies flashing and trim fabrication and installation
3. 7.5% net free area with perforations.

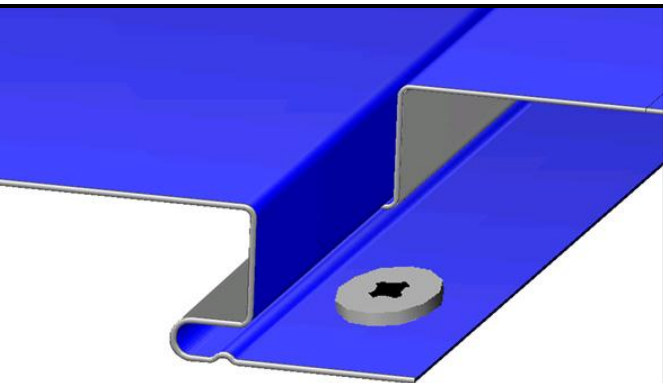

DIMENSIONAL METALS, INC.

DMI has specialized in the manufacturing of Architectural Metal Panel Systems and Fabricated Architectural Sheet Metal for the construction industry for over 20 years. We use the most technologically advanced Fixed Base Roll-Forming Equipment with in house quality control so that we can offer the highest product quality available.

Please contact our Engineering Department today for technical assistance.

Headquarters
58 Klema Drive North
Reynoldsburg, OH 43068
Tel: 800-828-1510
Fax: 740-927-3319

North Carolina
Tel: 800-919-1510

Web: www.dमितals.com
E-mail: sales@dmमितals.com

