




# STANDING SEAM METAL ROOFING

## SUPERLOK®

SuperLok® is a mechanically field-seamed, vertical leg standing seam roof system that combines a 2" tall slim rib with exceptional uplift resistance. It is available in both 12-inch and 16-inch widths. SuperLok® has been designed to withstand the most rigorous weather conditions. SuperLok® can be installed directly over purlins or bar joists. SuperLok® does not require a solid substructure for support.

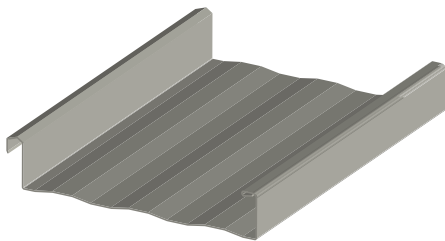

### Features and Benefits:

- SuperLok® panels are standard with striations to minimize oil canning.
- Low and high clips are available to allow for various thicknesses of insulation to be installed between the panels and purlins.
- Numerous UL 580 Construction rating are available, as well as UL 790, Class A for external fire, numerous roof assemblies for UL 263 for internal fire and the UL 2218 Class 4 impact rating.
- SuperLok® carries FM, Florida and Dade County approval ratings.

### Product Specifications

- **Applications:** Roof
- **Coverage Widths:** 12", 16"
- **Minimum Slope:** 1/2:12
- **Panel Attachment:** Concealed Fastening System, Low, High (fixed or floating), Utility (no insulation clearance)
- **Gauges:** 24 (standard); 22 and 26 (optional)
- **Finishes:** Smooth Striated (standard); Embossed Striated (optional)
- **Coatings:** Galvalume Plus®, Signature® 200, Signature® 300, Signature® 300 Metallic

[www.mbc.com](http://www.mbc.com)

HOUSTON, TX | 877.713.6224  
ADEL, GA | 888.446.6224  
ATLANTA, GA | 877.512.6224

ATWATER, CA | 800.829.9324  
DALLAS, TX | 800.653.6224  
INDIANAPOLIS, IN | 800.735.6224

LUBBOCK, TX | 800.758.6224  
MEMPHIS, TN | 800.206.6224  
OKLAHOMA CITY, OK | 800.597.6224

OMAHA, NE | 800.458.6224  
PHOENIX, AZ | 888.533.6224  
RICHMOND, VA | 800.729.6224

ROME, NY | 800.559.6224  
SALT LAKE CITY, UT | 800.874.2404  
SAN ANTONIO, TX | 800.598.6224

**MBCI**  
Metal Roof and Wall Systems®

# STANDING SEAM METAL ROOFING

## SUPERLOK®

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
<b>ENVIRONMENTAL</b>	Air Leakage Through Roof Panel Joints	ASTM E1680	Determines the air leakage characteristics of metal roof panels under specified air pressure differences at ambient conditions	0.0035 cfm/ft <sup>2</sup> at 1.57 psf static pressure 0.007 cfm/ft <sup>2</sup> at 6.24 psf static pressure
	Water Penetration Through Roof Panel Joints	ASTM E1646	Determines the resistance to water penetration of metal roof panels under uniform static air pressure difference	No uncontrolled water penetration through the panel joints at a static pressure of 12.00 psf
	Impact Resistance	UL 2218	Determines Impact Resistance of prepared Roof Covering Materials	Class 4 Rating
<b>FIRE RESISTANCE</b>	Room Fire Performance	UL 790	Standard for Standard Test Methods for Fire Tests of Roof Coverings	See Class A Fire Rating Data Sheet
	Room Fire Performance	UL 263	Standard for Fire Tests of Building Construction and Materials	For use in Design Nos. P225, P227, P230, P237, P265, P268, P508, P510, P512, P701, P711, P720, P722, P726, P731, P734, P801, P815, P819.
<b>STRUCTURAL</b>	Uplift Resistance	ASTM E 1592	Provides a standard procedure to evaluate or confirm structural performance under uniform static air pressure difference	See Load Chart Section
	Gravity Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section
<b>ROOF LISTINGS</b>	Roof Performance FM Global	FM 4471	Sets performance standards for panel roofs including uplift resistance	See FM Engineering Tech Bulletin
	Roof Performance Underwriters Laboratories	UL 580	Determines the uplift resistance of roof assemblies consisting of the roof and roof coverings materials	Class 90 Rating - Construction Number 90, 176, 180, 238B, 437, 449, 451, 452 and 487
	Roof Performance Miami-Dade County	TAS 125 TAS 201 TAS 100 FM 4471 App. G	The Product Control Approval System establishes a protocol to evaluate the standards of products used in construction in Miami-Dade County. Miami-Dade County, with its inclusion in the High Velocity Hurricane Zone (HVHZ) has the most stringent code requirements of the Florida Building Code. Therefore, all products that comprise the structure's building envelope — doors, shutters, windows, prefabricated buildings and truss plates — require the issuance of an approval in order to be used for construction in Miami-Dade County	See NOA # 12-0123.07 24 ga. Material See NOA # 12-0911.02 22 ga. Material
	Roof Performance Florida Approval	ASTM E 1592 FM 4471 UL 790	Florida product approval is the approval of products and systems, which comprise the building envelope and structural frame, for compliance with the structural requirements of the Florida Building Code.	See FL# 11819.4
	Roof Performance Texas Department of Insurance	ASTM E 1592	TWIA provides windstorm and hail insurance in areas exposed to hurricanes and currently provides windstorm and hail coverage in the following 14 "first tier" Texas coastal counties: Aransas, Brazoria, Calhoun, Cameron, Chambers, Galveston, Jefferson, Kenedy, Kleberg, Matagorda, Nueces, Refugio, San Patricio and Willacy.	See RC-392