


ULTIMA® Health Zone™

Square Lay-in, Tegular
fine texture



Ultima Health Zone with Suprafine® 9/16" suspension system



Visit Armstrong.com
Photo Gallery to view more
installation photos

SEARCH: ultima


KEY SELECTION ATTRIBUTES

- Clean Rooms up to ISO Class 5 (Class 100) (Items 1935 & 1937)
- Exceeds FGI Guidelines for acoustics and cleanability in general healthcare spaces
- Meets USDA/FSIS guidelines for use in food processing areas
- Long-lasting water-repellency; Washable and Scrubbable
- Smooth, clean, durable finish – Impact-resistant, Scratch-resistant, and Soil-resistant; safe for use with disinfectants
- Excellent sound absorption
- 30-Year Limited System Warranty against visible sag, mold/mildew, and bacterial growth

TYPICAL APPLICATIONS

- Clean Rooms (items 1935 & 1937)
Healthcare
- Patient rooms
 - Treatment rooms
 - Nurses' stations
 - Emergency rooms
 - Corridors
 - Lavatories and restrooms
 - Kitchen/food prep areas

DETAIL (Other Suspension Systems compatible. Refer to listing on page 206.)

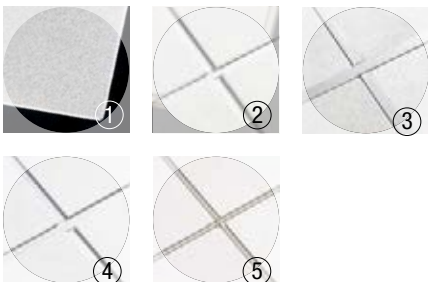

1. Ultima Health Zone Square Lay-in
2. Ultima Health Zone with Suprafine® 9/16" suspension system
3. Ultima Health Zone Square Lay-in with Clean Room™ 15/16" suspension system
4. Ultima Health Zone Square Tegular with Prelude XL 15/16" suspension system
5. Ultima Health Zone Square Tegular with Interlude® XL® HRC 9/16" suspension system

COLOR



White

Create! colors available on item 1935. See pages 165-167.

ULTIMA® Health Zone™

Square Lay-in, Tegular
fine texture

UP TO 77% RECYCLED CONTENT

LEED®

- energy management
- construction waste mgmt
- regional materials*
- design for flexibility
- EPD
- recyclable/extended producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

Calculate LEED contribution at armstrong.com/greengenie

*LOCATION DEPENDENT

VISUAL SELECTION

PERFORMANCE


Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 273-277 armstrong.com/catdwgs	Item No.	Dimensions (Inches)	Acoustics		Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability						Primary (Embodied) Energy	Recycled Content+	Recycle Program	Warranty*	
				NRC	CAC						Water Repel	Wash	Scrub	Impact	Scratch	Soil					Below 11MJ/SF
ULTIMA Health Zone				UL Classified	BioBlock+	Humi-Guard+															
15/16" Square Lay-in	1, 6, 7	1935	24 x 24 x 3/4"	0.70	38	Class A	0.86	•	•	•	•	•	•	•	•	•	•	•	High	•	30
15/16" Beveled Tegular	1, 6, 7	1938**	24 x 48 x 3/4"	0.70	38	Class A	0.86	•	•	•	•	•	•	•	•	•	•	•	High	•	30
15/16" Beveled Tegular	15, 16	1937	24 x 24 x 3/4"	0.70	38	Class A	0.86	•	•	•	•	•	•	•	•	•	•	•	High	•	30
9/16" Beveled Tegular	29, 44, 48, 52, 56, 60	1936	24 x 24 x 3/4"	0.70	38*	Class A	0.86	•	•	•	•	•	•	•	•	•	•	•	High	•	30

* CAC 36 if installed with Suprafine®, Interlude® XL® HRC, Sonata® XL

** Item does not have painted edges

SUSPENSION SYSTEMS

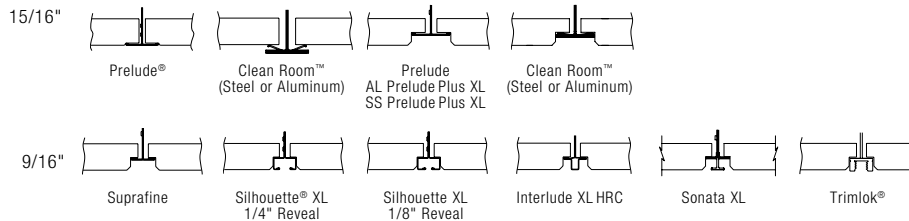

PHYSICAL DATA

Material

Wet-formed mineral fiber with DuraBrite® acoustically transparent water-repellent membrane

Surface Finish

DuraBrite with factory-applied latex paint

Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

ASTM E1264 Classification

Type IV, Form 2, Pattern E
Fire Class A

Sag Resistance

HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications.

Anti Mold/Mildew & Bacteria

BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

VOC Emissions

Third party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Primary (Embodied) Energy

See all LCA information on our EPD's.

High Recycled Content+

Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value

R Factor – 2.2 (BTU units)
R Factor – 0.39 (Watts units)

30-Year Performance Guarantee & Warranty†

When installed with Armstrong Suspension System. Details at armstrong.com/warranty

Cleaning Recommendations

To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface. To disinfect panel, lightly spray surface and wipe clean with a clean, white cloth. Acceptable colorless disinfectants include:

- Sodium hypochlorite
- Hydrogen peroxide
- Quaternary ammonium

Weight; Square Feet/Carton

1935, 1936, 1937, 1938 – 1.08 lbs/SF; 48 SF/ctn

Minimum Order Quantity

1 carton

