




## Series 526

### 2 1/2" x 5" Impact/Blast Grade Thermal Impact Storefront Frame

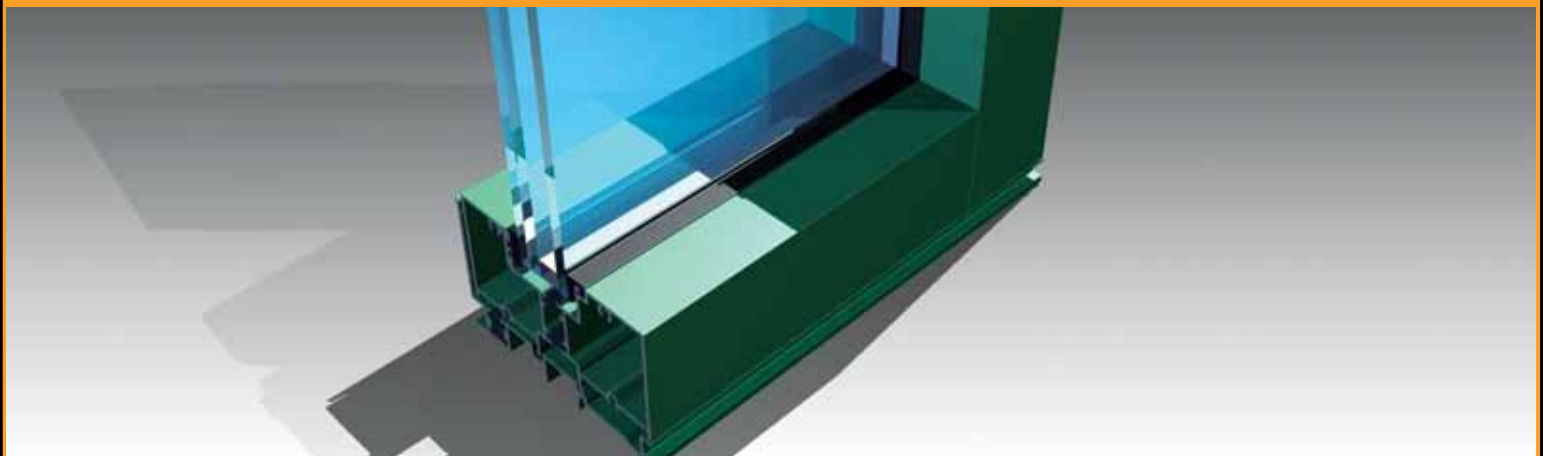

#### CONFIGURATIONS

Outside Glazed • Inside Glazed

Series 526 is an impact rated storefront product that incorporates the use of a polyurethane thermal barrier for improved CRF and U values. It can also be used with all standard and heavy duty EFCO impact rated entrance packages. The series 526 has applications for both small and large missile impact resistant "dry gasket" glazing and has been tested for High Velocity Hurricane Zone (HVHZ) with 1 5/16" insulating glass utilizing inboard 9/16" laminated glass with .090" Dupont™ Sentry Glass® Plus interlayer. Florida Product Approvals 13599.8.

#### Features

#### Benefits

Screw spline construction	Allows assembly of sections prior to installation
Thermally broken with E-Strut™ at sill and subsill	Decreases installation time
Thermally broken with pour & debridge polyurethane	Enhanced Thermal Properties
Integral door adaptors	Compatible with all 1-3/4" EFCO doors Contact EFCO Product Technical Support Department for 2" Doors
Joint fasteners are #12	Strengthens system Simplifies fabrication
Horizontals are square cut	Eliminates notching Easier fabrication and assembly
Dry Glazed	Assures a positive weather seal for high performance. Reduced labor cost.
Interlocking legs at sub-sill	Holds sill in place No "blind" seals are required at the sill
Head and jamb anchors are inside the glazing pocket	Anchors are not visible
Accessory line of perimeter anchors, pocket fillers, door adaptors, etc.	Increased product versatility
Anodized or painted finishes available	Multiple options to answer economic and aesthetic concerns

