ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
10	27258-8.50	RAIL, 1-1/4" X 8.50L,	4
20	27258-19.50	RAIL, 1-1/4" X 19.50L,	2
30	27258-42.00	RAIL, 1-1/4" X 42.00L,	4
40	27258-58.25	RAIL, 1-1/4" X 58.25L,	6
50	1985-36.00	CHAIN, SAFETY, STL, ZPS	1
510	27185	FTG, ELBOW,	4
520	27186	FTG, CROSS ELBOW,	4
525	27231	FTG, DBL TEE,	4
535	27260	BOLT, LIFTING EYE, 3/8-16,	2
540	27266	SPRING, CLIP 2, ZINC	2
545	27261	FTG, No. 78 SHORT COLLAR,	2
595	27327	FTG, No. 46 BASE, OVAL,	4

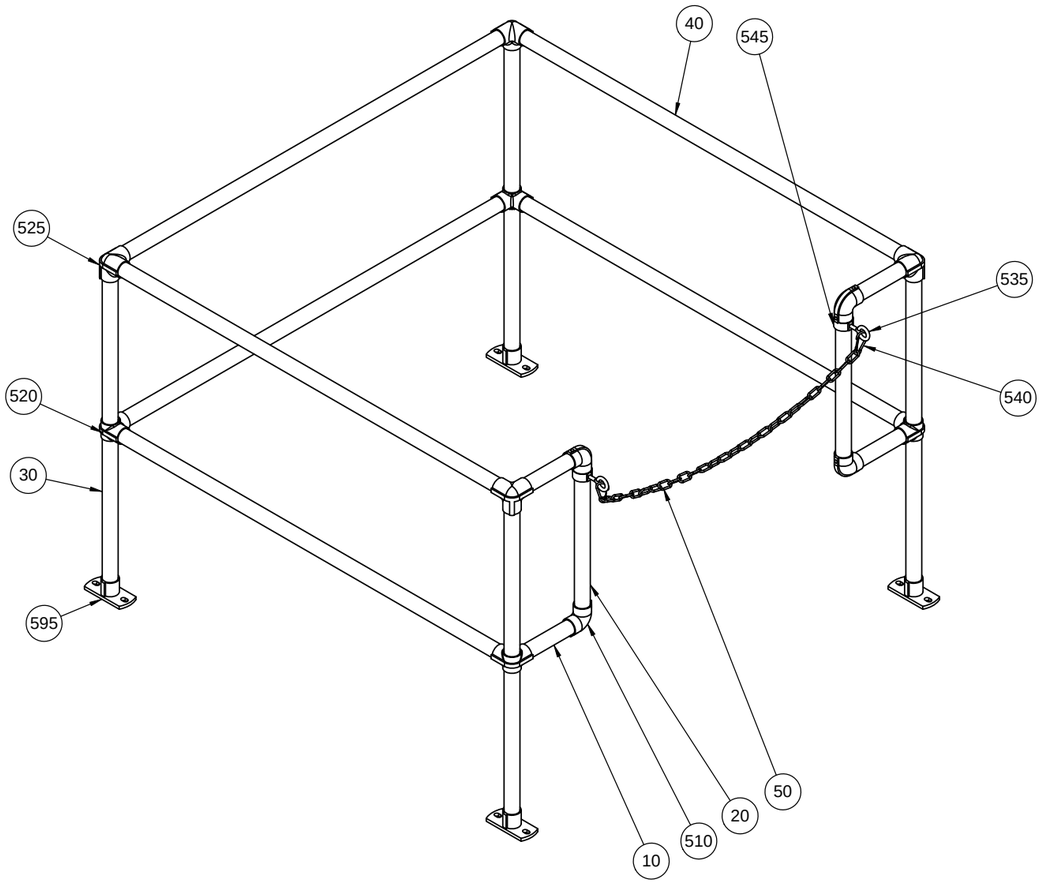

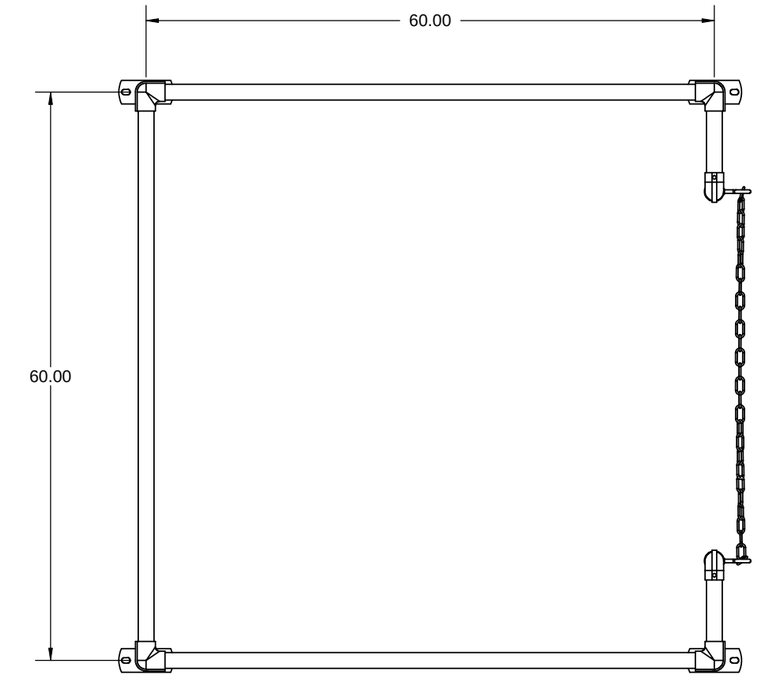

SPECIFICATIONS

RAILS, POSTS: GALVANIZED PIPE 1 1/4" I.D. SCH 40 A53 GRADE B SEAMED STEEL

CHAIN: ZINC PLATED, SPRING CLIPS ON BOTH ENDS

RAILING FITTINGS AND PLUGS: MANUFACTURER'S STANDARD CAST WITH SET SCREW HOLD

FITS FLOOR HATCHES WITH UP TO 36" X 36"

CERTIFICATIONS: MEETS OSHA 29 CFR 1910.23 GUARDING FOR OPENINGS REQUIREMENTS; SUPPORTS 200 LBS. FORCE

SRTG36X36FC

Babcock-Davis®
Always right there.
9300 73rd Avenue North
Brooklyn Park, MN 55428

TITLE:
Safety Railings for Floor Hatch
36X36, Front Exit,
Steel, Galvanized, Chain

	NAME	DATE
DRAWN	DKL	6/23/10
RELEASED	-	-

SIZE B | DWG. NO. SRTG36X36FC | REV A

WEIGHT: 109.68 | SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.