$MATOPSION^{TM}$

M-700RT MAT DETAIL

OUR ALUMINUM HINGE ROLL-UP MATS HAVE ALL ALUMINUM RAILS. UNLIKE MATS WITH HIDDEN VINYL UNDER-CHANNELS OR VINYL RAILS, ALUMINUM RAIL MATS ARE SUITABLE FOR COMMERCIAL APPLICATIONS. THEY MAINTAIN THEIR INTEGRITY IN ALL WEATHER SO THE TREADS STAY IN THE RAILS


DETAIL NOTES:


- 1-TREAD RAILS MUST RUN PERPENDICULAR TO TRAFFIC DIRECTION.
- 2-MAT DIMENSIONS ALLOW FOR CLEARANCE BETWEEN MAT SECTIONS AND FRAME IN THE WIDTH DIMENSION ONLY.
- 3-TRIM THE FILLER TO ENSURE A TIGHT FIT IN THE TRAFFIC DIMENSION

3

SPECIFICATIONS:

MATDESIGN MODEL M-700RT HAS OUR RUBBER TREAD.
WHICH IS EXTRUDED BLACK VULCANIZED RUBBER WITH
CONVEX SHAPE AND CONTINUOUS SERRATIONS. RAILS ARE
MADE WITH 6063-T52 ALLOY RAILS AND ARE 3/8" (9.5MM) DEEP
AND, SPACED 2" (50.8MM) ON CENTER. FRAMES USED WITH
THE M-700RT ARE: TYPE F-3 RECESSED; TYPE F-4 SURFACE MOUNT;
TYPE F-6 THIN LINE; F-6R THIN LINE CAST IN PLACE FRAMES
WHICH ARE MADE OF ALUMINUM. IN ADDITION OUR F-5
SURFACE FRAME IS AVAILABLE IN VINYL.

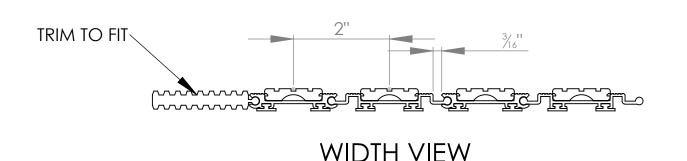

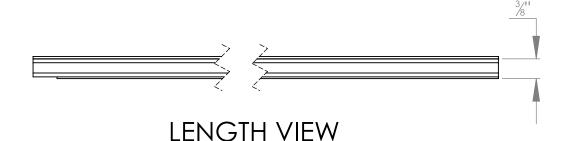

Arden
Architectural
Specialties, Inc.™

9300 73rd Avenue North
Brooklyn Park, MN 55428

JOB REF.

MODEL NO. M-700RT

RELEASED DATE 6/3/2010

SHEET 1 OF 1

OPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED

7 6 5 4

2

1