


B

B

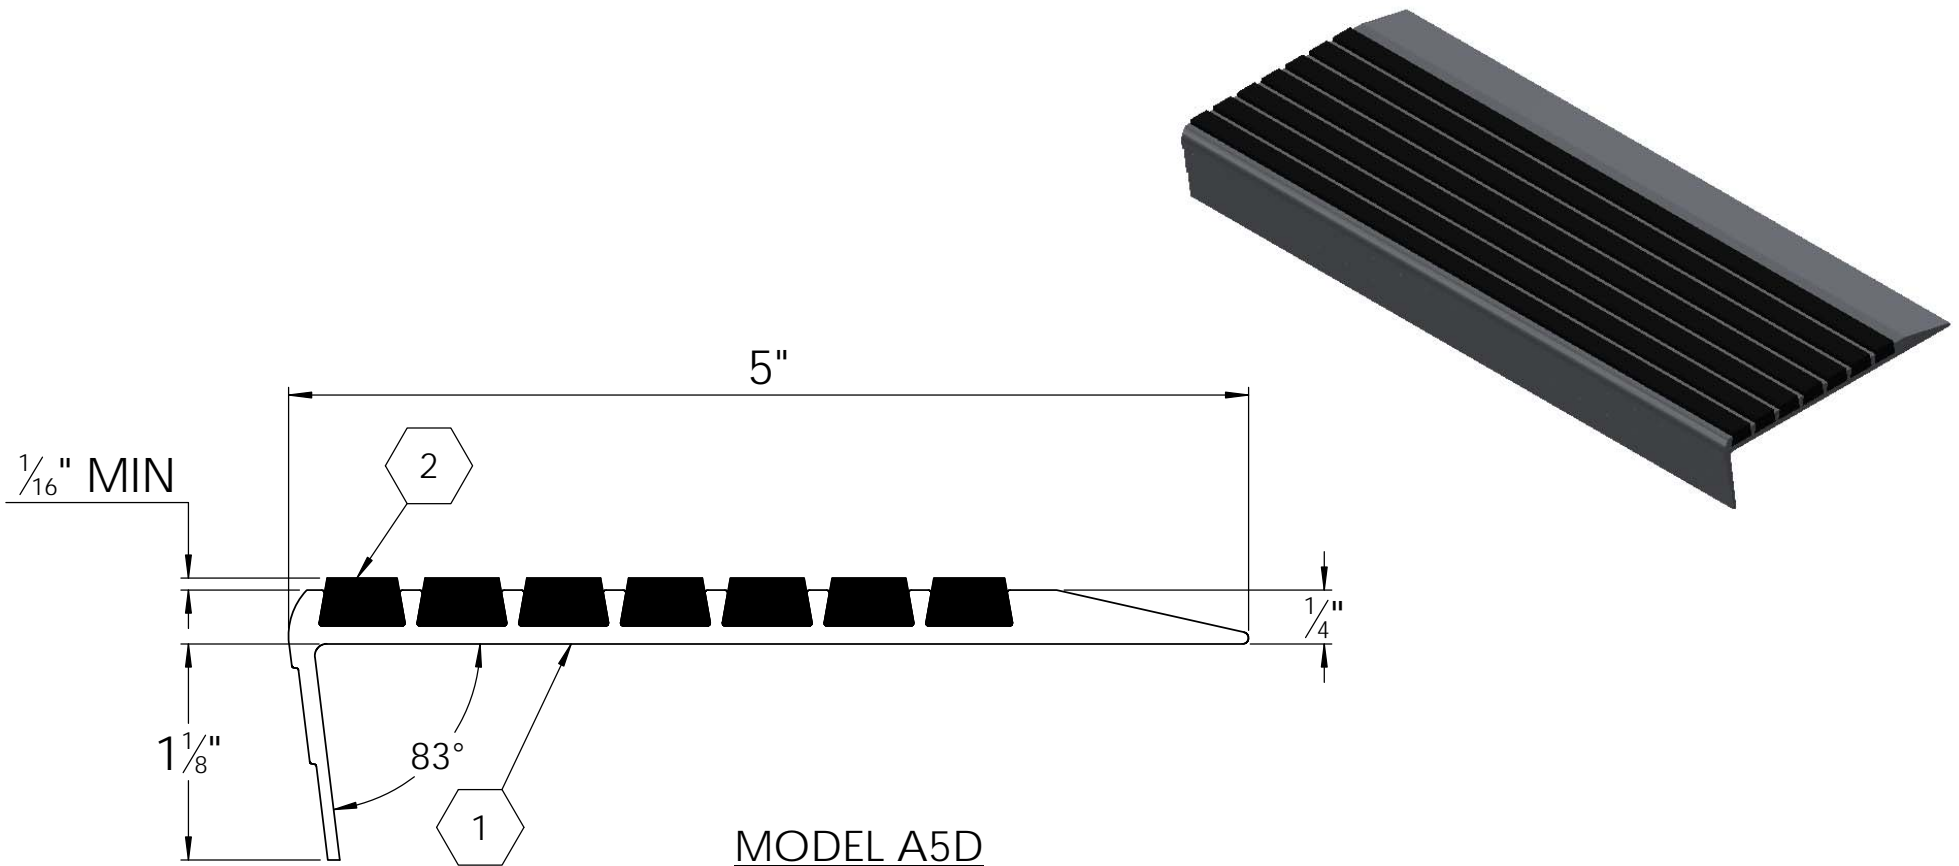

## MODEL A5D

(RENOVATION RIBBED ABRASIVE BARS)

### SPECIFICATIONS:

- ① **BASE:** HEAT TREATED EXTRUDED ALUMINUM  
ALLOY 6063 T-5
- ② **ABRASIVE:** ALUMINUM OXIDE SILICON CARBIDE  
GRANULES IN A UV PROTECTED, 2 PART EPOXY,  
LOCKED INTO EXTRUDED CHANNELS
3. **BASE FINISH:** MILL
4. **POURED CONCRETE STAIRS:** NOSING SHALL  
TERMINATE NO MORE THEN 3" FROM END OF STEPS
5. **CONCRETE FILLED STEEL PAN STAIRS:** NOSING  
SHALL BE FULL LENGTH OF STEPS, LESS 1/8"  
CLEARANCE
6. **COLOR:** BLACK (STANDARD), SAFETY YELLOW,  
GRAY, RED, BROWN, GREEN, BURGUNDY, BLUE,  
BUFF, LUMINESCENT

7. **LENGTH:** 12'0" MAXIMUM
8. COUNTER SUNK HOLES PRE-DRILLED FOR A #10  
FASTENER SPACED 3" FROM ENDS AND  
APPROXIMATELY 12" TO 15" O.C.
9. UL 1994 LISTED: COMBINED WIDTH OF PHOTO-  
LUMINESCENT MATERIAL SHALL NOT BE LESS  
THAN 1"

LENGTH	QTY	COLOR

PROJECT:					
ARCHITECT:					
CONTRACTOR:					
QTY:					
PART#:				STRB-A5D	
<b>NYSTROM</b> <small>Right to site.</small> 9300 73rd Avenue North Brooklyn Park, MN 55428				TITLE:	
				V470S, Stair Tread, Bar Ribbed Abrasive, Long Nose Angled, Drilled For Bolt In,	
	NAME	DATE	SIZE	DWG. NO.	REV
DRAWN	BMH	3/11/11	A	STRB-A5D	A
RELEASED	PE	3/11/11	WEIGHT: 2 LB	SHEET 1 OF 1	

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.

A

A