


В

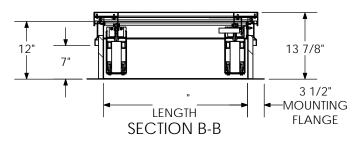

SPECIFICATIONS:

В

- (1) COVER: 11 GA ALUM COVER STIFFENED TO WITHSTAND A LIVE LOAD OF 40PSF WITH A MAX DEFLECTION OF 1/150 OF THE SPAN
- (2) LINER: 18 GA ALUM
- (3) CURB AND COUNTERFLASH W/ EZ TAB:

11 GA ALUM

- 4 FINISH: MILL FINISH
- (5) SPRING/HINGE ASSEMBLY: ZINC PLATED STEEL TAMPER-PROOF HINGE CONTAINED WITHIN SPRING/HINGE ASSEMBLY. TELESCOPIC TUBES CONTAIN COIL STEEL COMPRESSION SPRINGS FOR LIFT ASSISTANCE
- (6) HOLD OPEN ARM: LOCKS COVER IN FULLY OPEN POSITION ZINC PLATED STEEL WITH RED VINYL GRIP HANDLE PULL RELEASE
- (7) LATCH: SINGLE POINT LATCH SLAM LATCH HOLDS COVER CLOSED AGAINST 20 PSF WIND UPLIFT. INTERNAL AND EXTERNAL TURN HANDLES WITH PADLOCK HASPS

- 8 insulation:
- 1" POLYSTYRENE (R4) IN COVER, AND 1" FIBERBOARD (R2.8) IN CURB
 - GASKET: ADHESIVE BACKED EPDM RUBBER EXTRUSION
- 10 SIZING: WIDTH X LENGTH DIMENSIONS ARE MEASURED INSIDE CURB TO INSIDE CURB WHERE THE WIDTH IS HINGE TO LATCH AND LENGTH IS HINGED SIDE WITH SPRINGS

ROOF HATCH SIZE " (WIDTH) X " (LENGTH)

CLEAR OPENING " (WIDTH) X " (LENGTH)

ROUGH OPENING " (WIDTH) X " (LENGTH)

PROJECT: ARCHITECT: CONTRACTOR: QTY: PART#: Roof Hatch, Personnel Series, Babcock-Davis

9300 73rd Avenue North
Brooklyn Park, MN 55428 Sngl Dr, Zinc Hdw, Alum Curb and Cover, Mill Finish, Sngl Wall Curb NAME DATE SIZE DWG. NO. REV Α DRAWN ELW 9/10/12 RELEASED WEIGHT: VARIES SHEET 1 OF 2

2

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.

1

