

**GEBERIT** 

Duravit "Vero" toilet with Geberit Monolith in White Glass

# EBERIT Geberit Product Catalog

May 2013

KNOW HOW INSTALLED

# **Table of Contents**

#### **Geberit Installation Systems**

Product features, installation scenarios, system components	Page 3-5
Systems for Wall-Hung Toilets	
Geberit Duofix Carrier with Sigma Concealed Tank, 2x6 Installations	6-7
Geberit Duofix Carrier with Sigma Concealed Tank, 2x4 Installations	8-9
Geberit Duofix Carrier with Kappa Concealed Tank, Pre-Wall Installations	10-11
Systems for Wall-Hung Urinals	
Geberit Duofix Carrier, Actuators and Accessories, All Installations	12
Systems for Wall-Hung Bidets	
Geberit Duofix Carrier, Actuators and Accessories, All Installations	13
Systems for Wall-Hung Lavatories	
Geberit Duofix Carrier and Accessories, All Installations	14
Geberit Flushing System	
Systems for Floor-Mounted, Back Outlet Toilets	45.47
Geberit Sigma Concealed Tank, Actuators and Accessories, 2x6 Installations	15-17
Geberit Monolith EW Systems for Floor-Mounted Back-Outlet Toilets Geberit Monolith Module	20
System for Wall-Hung Toilets	20
Geberit Monolith Module	20
	20
Geberit Bath Waste & Overflow Systems	
Trim Finishes and Rough-In Unit Materials	22-23
Selecting the Right Size Bath Waste and Overflow	24-25
TurnControl BWO Systems	
Geberit BWO Rough-in and Complete Units, Trim Kits and Accessories	26-28
PushControl BWO Systems	
Geberit BWO Complete Units and Accessories	29
TurnControl BWO Systems with Cascading Tub Fillers	
Geberit BWO Complete Units and Accessories	29
Limited Warranty	30

Geberit North America is part of the Geberit Group, a European market leader and global provider of sanitary technology. Located in Des Plaines, Illinois, Geberit North America provides concealed tank and carrier systems for wall-hung and floor-mounted toilets and fixtures. Geberit systems improve the look of any bathroom by hiding the unsightly toilet tank. Replacing a standard tank and toilet with the Geberit system results in more usable space, improved hygiene and better accessibility. The unique dual-flush valve saves water and is practically maintenance free. Geberit also offers cable-controlled bath waste and overflows in a variety of designer finishes. Critical working parts are outside the waterway, ensuring years of trouble-free operation.

# For more information, contact your Geberit sales representative, call 800/566-2100 or go to $\rightarrow$ geberit.us.

Possession of this Catalog does not constitute an offer to sell Geberit product. Please refer to → geberit.us for our comprehensive terms and conditions.



# Distinctive...Sustainable...Uncompromising

Geberit Installation Systems keep the unsightly out of sight.

#### Aesthetics

Safely hidden behind the wall, Geberit's in-wall technology allows unique beauty from floor to ceiling.

### Water Saving

Geberit Dual-Flush Technology provides an effective flush volume of 1.1 GPF, exceeding the 1.28 GPF High Efficiency (HET) standard.

### Space Saving

Design possibilities are realized with elegance when the toilet is off the floor. For confined spaces, it's the ideal choice.

### Easy to Clean

Because the toilet is off the floor, cleaning the entire area is easy.

#### Flexibility

The adjustable-height carrier allows you to position the toilet 15" to 19" off the floor for meeting ADA requirements or personal preference.

#### **Strength and Stability**

The Geberit Installation System supports up to 880 lbs., exceeding ASME A112.6.2 strength requirements.

### **Accessible Maintenance**

The Geberit Installation System offers easy access to all internal components, including the fill and flush valves, through decorative actuator flush panels. No tools are needed for simple changeouts.











### **Installation Scenarios**


Geberit Duofix Carriers are simple and easy to install. They require either a  $2^{"} \times 4^{"}$  or a  $2^{"} \times 6^{"}$  wood frame or metal frame construction. The studs must be placed 23-1/4" apart for  $2^{"} \times 4^{"}$  installation and 19-3/4" apart for  $2^{"} \times 6^{"}$  installation where the carrier will be positioned inside a wall. For pre-wall installations, frame to wall anchors are needed. Wood frame in-wall installation, front activation.



Metal frame in-wall installation, front activation.




Pre-wall installation, front activation.



Pre-wall installation,

top or front

### System Components

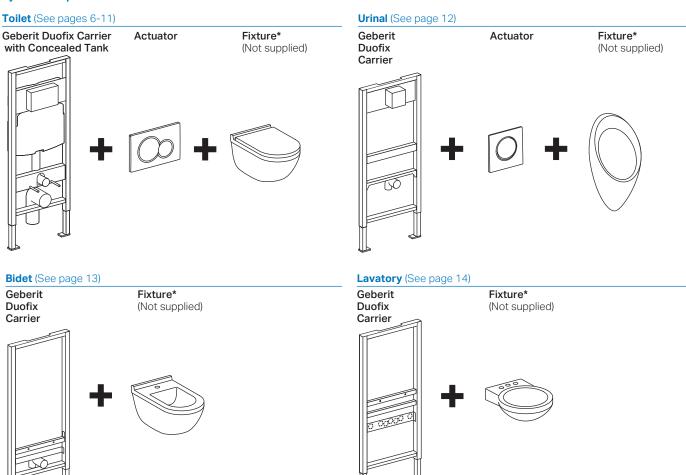

\* Contact vitreous china manufacturer for complete selection of products. Refer to **→** geberit.us for recommended manufacturers.

# Systems for Wall-Hung Toilets, 2x6 Installations

# **Dual-Flush Actuators**

### Dimensions: 9.75" x 6.5" (24.6 cm x 16.4 cm)

Style	Material	Finish	Model No.	List Price
Bolero	Plastic	Alpine White	115.777.11.1	\$108.00
		Polished Chrome	115.777.21.1	140.00
		Matte Chrome	115.777.46.1	140.00
Sigma01	Plastic	Alpine White	115.770.11.5	80.00
		Polished Chrome	115.770.21.5	108.00
9		Matte Chrome	115.770.46.5	108.00
		Star White	115.770.FR.5	80.00
Sigma20	Metal	Br Ni-Polish-Br Ni*	115.778.ID.1	225.00
		Br SS-Polish-Br SS*	115.778.SN.1	226.00
00		Br Ni-Polish-Br Ni* Vandal Resistant	115.781.ID.1	260.00
		Br SS-Polish-Br SS* Vandal Resistant	115.781.SN.1	260.00
	Plastic	Polish-Matte-Polish*	115.778.KH.1	167.00
		White-Polish-White*	115.778.KJ.1	116.00
		Black-Polish-Black*	115.778.KM.1	143.00
Sigma50	Die Cast	Customer supplied inlay	115.788.00.1	334.00
		Alpine White	115.788.11.1	334.00
		Black	115.788.DW.1	334.00
		Brushed Chrome	115.788.GH.1	431.00
		White Pattern Glass	115.788.SC.1	431.00
		Smoke Glass	115.788.SD.1	431.00
		Green Satin Glass	115.788.SE.1	431.00
Sigma60	Die Cast	Complete Rough-in and Trim Set	115.792.GH.1	556.00
$\square$		Rough-In Set***	115.795.21.1	167.00
		Brushed Chrome Trim Set***	115.796.GH.1	389.00
-				

# **Dual-Flush Push Buttons**

Dimensions: Round - 3.25" (8 cm) diameter Square - 4.25" x 4.25" (10.8 cm x 10.8 cm) Bectangle -5.06" x 2.91" (12.9 cm x 7.4 cm)

	$12.9 \text{ cm} \times 7.4 \text{ cm}$				
Style	Material	Finish	Model No.	List Price	
Round	Plastic	Polished Chrome	115.999.21.1	\$143.00	
Ø					
Square	Plastic	Alpine White	115.942.11.1	110.00	
D		Polish-Matte**	115.942.KA.1	143.00	
Rectangle	Plastic	Polish-Matte**	115.932.KA.1	143.00	
	Metal	Brushed Chrome	115.932.GH.1	226.00	

### Single-Flush Push Buttons Dimensions: Round - 2.5" (6.2 cm) diameter

### Square - 4.25" x 4.25" (10.8 cm x 10.8 cm)

Round	Plastic	Alpine White	115.114.11.1	94.00
0		Polished Chrome	115.114.21.1	110.00
-	Metal	Brushed SS	115.114.FW.1	226.00
Square	Plastic	Alpine White	115.941.11.1	94.00
D		Polish-Matte**	115.941.KA.1	143.00

6<sup>5</sup>/8" (168 mm)

26<sup>3</sup>/8 (670 mm)

Х 12"-16'

(305– 407 mm)

45"- 49"

(1143– 1245 mm)

 $5^{1}/2^{"}$ 

ວ ′/2" \_▶ -(140 mm) min.

NPT 1/2"

П

Refer to Cover Plates for use with Buttons" on next page

#### Geberit Duofix Carrier Model No. Description

\_\_\_19<sup>3</sup>/4" (500 mm

\$

GEBERIT

0

111.335.00.5

UPC .

71/8" or

9<sup>1</sup>/8"

(180 or

230 mm)

4" (100 mm

### List Price Carrier frame with Sigma concealed tank, 2x6 installations 519.00

2<sup>3</sup>/8"

(60 mm)

22'

(558 mm)

Finished Rim Height (FRH)

FRH = X plus 3"

Stud Front

Center Pipe

→ 3<sup>1</sup>/2" ←

(90 mm)

∇ FF

FRH

▼

Single-Flush Actuators

### Dimensions: 9.75" x 6.5" (24.6 cm x 16.4 cm)

Tango	Die Cast	Alpine White	115.760.11.1	221.00
		Polished Chrome	115.760.21.1	221.00
		Matte Chrome	115.760.46.1	221.00
		Oil Rubbed Bronze	115.760.HM.1	372.00
		ForeverShine <sup>™</sup> PVD Polished Nickel	115.760.IB.1	372.00
		ForeverShine™ PVD Brushed Nickel	115.760.ID.1	372.00

# Hands Free Actuators

### Dimensions: 9.75" x 6.5" (24.6 cm x 16.4 cm)

Mambo	Metal	Brushed SS (AC Power) <sup>++</sup>	115.890.00.1	721.00
		See page 7 for transformers for AC	power.	
		Brushed SS (Battery/DC Power)	115.891.00.1	721.00

Finishes follow this pattern = Plate-Ring-Button \*\*

Finishes follow this pattern = Frame-Button Polish = Polished Chrome

Matte = Matte Chrome

Br SS = Brushed Stainless Steel

Br Ni = Brushed Nickel

Rough-in Set and Trim Set can be ordered separately. Both sets needed for installation.

New product name or new items – Available May 1, 2013
 Requires 230 V, 50 Hz or transformer to 120 V, 60 Hz. Suggested accessory 115.861.00.1.

NOTES

FF  $\nabla$ 

→ min. 4"

31/2

(90 mm)

Concealed tank shipped dual-flush ready
 Geberit Duofix Carrier for 2-hole washdown style wall-hung toilet fixtures only

3. Refer to → geberit.us for latest list of Code approved Compatible toilet fixtures, including certified WaterSense combinations

TOIL FT

TOLLET

# **Optional Accessories**

Mounting <i>I</i>	Accessories 1	or	Geberit	Duofix	Carrier	Frames

Description		Model No.	List Price
Dang Dang	Frame to wall anchoring for 5.125"-7.875" (13-20 cm) thick unfinished pre-wall	111.815.00.1	\$30.00
Contraction of the second	Frame to wall anchoring for 5.125"-7.875" (13-20 cm) thick unfinished pre-wall corner installations	111.835.00.1	30.00
	Support brackets for wall-hung toilets with small contact surface (thin profiles)	111.847.00.1	40.00
6	Fire protection set for Sigma concealed tank 90 min. fire resistance to DIN EN 1364-1:1999-10	111.863.00.1	464.00
	Frame to wall anchoring where foot installations into floor are not allowed for 5.125"-7.875" (13-20 cm) thick unfinished pre-wall	111.867.00.1	61.00
	Frame to stud fastening set for extended stud spacing from 19.75"-25.56" (50-65 cm)	111.869.00.1	30.00
ß	Frame to wall anchoring extensions for 7.875"-15.75" (20-40 cm) thick unfinished pre-wall	111.887.00.1	11.00
Waste Fittings			
	HDPE straight connector with socket for Ø3.50" (Ø90 mm) push fit piping and Ø3.50" (Ø90 mm) outlet x 12" (31 cm) long	366.887.16.1	30.00
	HDPE connector with offset for LH horizontal drain connections (as viewed from sitting position), 1 x 90° bend with socket for Ø3.50" (Ø90 mm) push fit piping, with 45° offset and Ø3.50" (Ø90 mm) outlet for 5.5" (13.97 cm) minimum walls onl	366.913.16.1 y.	67.00
	HDPE connector with offset for RH horizontal drain connections (as viewed from sitting position), 1 x 90° bend with socket for Ø3.50" (Ø90 mm) push fit piping, with 45° offset and Ø3.50" (Ø90 mm) outlet for 5.5" (13.97 cm) minimum walls onl	366.914.16.1	67.00
	Cast iron outlet bend; 1 x 90° bend with socket for Ø3.50" (Ø90 mm) push fit piping and 3" CIP outlet	367.071.18.1	138.00
	HDPE "Back-to-back" connector for horizontal drain connections; 2 x 90° bends with sockets for Ø3.50" (Ø90 mm) push fit piping, with 45° offs and expansion to Ø4.375" (Ø110 mm) for 10.75" (27.31 cm) minimum walls of	outlet	138.00
	HDPE "Back-to-back" connector for vertical drain connections; 2 x 90° bends with sockets for Ø3.50" (Ø90 mm) push fit piping and expansion to Ø4.375" (Ø110 mm) outle for 10.75" (27.31 cm) minimum walls of		138.00

### Transformers for AC Power



Model No. List Price 115.861.00.1 \$100.00 Transformer for Mambo AC powered hands free actuator.

### Cover Plates for use with Push Buttons

Cover plate for Sigma concealed tanks 2x6 and 2x4. Die Cast, Alpine White	115.765.11.1	228.00
Cover plate for Sigma concealed tanks 2x6 and 2x4. Die Cast, Matte Chrome	115.765.46.1	228.00
Cover plate for Sigma concealed tanks 2x6 and 2x4. Metal, Brushed SS	115.798.00.1	180.00

### Bowl Connection Sets and Accessories for Finished Walls up to 3.5" (9 cm) Thick

			,
	Connector set with mounting hardware (bowl installation kit), HDPE; Alpine White cover caps	152.404.11.1	38.00
	HDPE connection set with 1" (2.5 cm) offset and mounting hardware (bowl installation kit); with socket for Ø3.50" (Ø90 mm) push fit piping and Ø55 supply inlet; Matte Chrome cover caps	405.116.00.1	205.00
0000	Cover caps with leveling washer, Plastic, Alpine White	217.713.11.1	5.00
0	Acoustic insulation set for wall-hung toilets and bidets	156.050.00.1	15.00


### Bidet Seat Accessory for Geberit Duofix Carrier Frames

Water supply hose for bidet seat for 111.355.00.5, 111.728.00.1 and 111.255.00.1 carriers with Sigma concealed tanks 2x6 and 2x4 and Kappa concealed tank. For adding bidet seat to an installed carrier.	249.801.00.1	135.00

Required Accessories for 3.50"-7.00" (9-18 cm) Finished Wall Thickness					
	Mounting rod extension set for wall-hung toilet and bidet, M12	242.232.00.1	60.00		
	Mud guard protection housing for Sigma concealed tanks 2x6 and 2x4, Plastic	241.826.00.1	11.00		
J J J J J vvvv	Extension set for actuator plates for Sigma concealed tanks 2x6 and 2x4 and Kappa concealed tank	240.938.00.1	19.00		
6000 6000	HDPE Connector set for extended installation and mounting hardware (bowl installation kit), with socket for Ø3.50" (Ø90 mm) push fit piping and Ø55 supply inlet; Matte Chrome cover	152.438.46.1 caps	50.00		

# Systems for Wall-Hung Toilets, 2x4 Installations

Style	Material	6.5" (24.6 cm x 16.4 cm) Finish	Model No.	List I
Bolero	Plastic	Alpine White	115.777.11.1	\$10
		Polished Chrome	115.777.21.1	14
		Matte Chrome	115.777.46.1	14
Sigma01	Plastic	Alpine White	115.770.11.5	8
$\overline{m}$		Polished Chrome	115.770.21.5	10
0		Matte Chrome	115.770.46.5	10
		Star White	115.770.FR.5	8
Sigma20	Metal	Br Ni-Polish-Br Ni*	115.778.ID.1	22
		Br SS-Polish-Br SS*	115.778.SN.1	22
00		Br Ni-Polish-Br Ni* Vandal Resistant	115.781.ID.1	26
		Br SS-Polish-Br SS* Vandal Resistant	115.781.SN.1	26
	Plastic	Polish-Matte-Polish*	115.778.KH.1	16
		White-Polish-White*	115.778.KJ.1	11
		Black-Polish-Black*	115.778.KM.1	14
Sigma50	Die Cast	Customer supplied inlay	115.788.00.1	33
		Alpine White	115.788.11.1	33
		Black	115.788.DW.1	33
		Brushed Chrome	115.788.GH.1	43
		White Pattern Glass	115.788.SC.1	43
		Smoke Glass	115.788.SD.1	43
		Green Satin Glass	115.788.SE.1	43
Sigma60	Die Cast	Complete Rough-in and Trim Set	115.792.GH.1	55

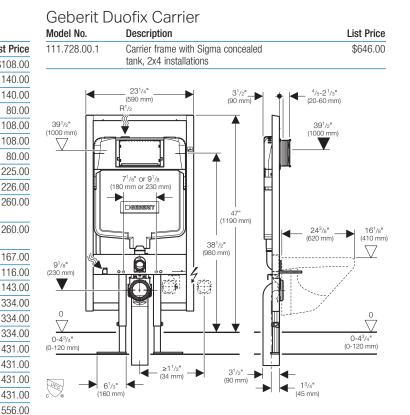

NOTES:

167.00

389.00

115.795.21.1

115.796.GH.1

Concealed tank shipped dual-flush ready

 Geberit Duofix Carrier for 2-hole washdown style wall-hung toilet fixtures only
 Refer to → geberit.us for latest list of Code approved Compatible toilet fixtures, including certified WaterSense combinations

# Single-Flush Actuators

### Dimensions: 9.75" x 6.5" (24.6 cm x 16.4 cm)

Rough-In Set\*\*\*

Brushed Chrome Trim Set\*\*\*

Tango	Die Cast	Alpine White	115.760.11.1	221.00
		Polished Chrome	115.760.21.1	221.00
		Matte Chrome	115.760.46.1	221.00
		Oil Rubbed Bronze	115.760.HM.1	372.00
		ForeverShine <sup>™</sup> PVD Polished Nickel	115.760.IB.1	372.00
		ForeverShine™ PVD Brushed Nickel	115.760.ID.1	372.00

### Single-Flush Push Buttons

Dimensions:	Square - 4.25" x 4.25" (10.8 cm x 10.8 cm)
-------------	--

			,	,	
Square	Plastic	Alpine White		115.991.11.1	94.00
D		Polish-Matte**		115.991.KA.1	143.00

Refer to next page for Cover Plates for Use with Push Buttons.

Finishes follow this pattern = Plate-Ring-Button Finishes follow this pattern = Frame-Button

Polish = Polished Chrome

Matte = Matte Chrome

Br SS = Brushed Stainless Steel

Br Ni = Brushed Nickel

\*\*\* Rough-in Set and Trim Set can be ordered separately. Both sets needed for installation.

† New product name or new items - Available May 1, 2013.

### Optional Accessories

Description		Model No.	List Price
CERCE REAL	Frame to wall anchoring for 5.125"-7.875" (13-20 cm) thick unfinished pre-wall corner installations	111.835.00.1	\$30.00
	Frame to wall anchoring where foot installations into floor are not allowed for 5.125"-7.875" (13-20 cm) thick unfinished pre-wall	111.867.00.1	61.00
ß	Frame to wall anchoring extensions for 7.875"-15.75" (20-40 cm) thick unfinished pre-wall	111.887.00.1	11.00
	Frame to wall anchoring for 5.125"-7.875" (13-20 cm) thick unfinished pre-wall	242.048.00.1	19.00
Naste Fittings			
	HDPE straight connector with socket for Ø3.50" (Ø90 mm) push fit piping and Ø3.50" (Ø90 mm) outlet x 12" (31 cm) long	366.887.16.1	30.00
	HDPE connector with offset for LH horizontal drain connections (as viewed from sitting position), 1 x 90° bend with socket for Ø3.50" (Ø90 mm) push fit piping, with 45° offset and Ø3.50" (Ø90 mm) outlet for 5.5" (13.97 cm) minimum walls onl	366.913.16.1 y.	67.00
	HDPE connector with offset for RH horizontal drain connections (as viewed from sitting position), 1 x 90° bend with socket for Ø3.50" (Ø90 mm) push fit piping, with 45° offset and Ø3.50" (Ø90 mm) outlet for 5.5" (13.97 cm) minimum walls onl	366.914.16.1 y.	67.00
	Cast iron outlet bend; 1 x 90° bend with socket for Ø3.50" (Ø90 mm) push fit piping and 3" CIP outlet	367.071.18.1	138.00
	HDPE "Back-to-back" connector for horizontal drain connections; 2 x 90° bends with sockets for Ø3.50" (Ø90 mm) push fit piping, with 45° offs and expansion to Ø4.375" (Ø110 mm) for 10.75" (27.31 cm) minimum walls of	outlet	138.00
	HDPE "Back-to-back" connector for vertical drain connections; 2 x 90° bends with sockets for Ø3.50" (Ø90 mm) push fit piping and expansion to Ø4.375" (Ø110 mm) outle for 10.75" (27.31 cm) minimum walls of	367.923.16.1 et only.	138.00

#### Cover Plates for use with Push Buttons

Description		Model No.	List Price
	Cover plate for Sigma concealed tanks 2x6 and 2x4. Die Cast, Alpine White	115.765.11.1	\$228.00
	Cover plate for Sigma concealed tanks 2x6 and 2x4. Die Cast, Matte Chrome	115.765.46.1	228.00
	Cover plate for Sigma concealed tanks 2x6 and 2x4. Metal, Brushed SS	115.798.00.1	180.00

### Bowl Connection Sets and Accessories for Finished Walls up to 3.5" (9cm) Thick

Bowl Connection S	ets and Accessories for Finished Wa	lls up to 3.5" (9cm)	) Thick
	Connector set with mounting hardware (bowl installation kit), HDPE; Alpine White cover caps	152.404.11.1	38.00
	HDPE connection set with 1" (2.5 cm) offset and mounting hardware (bowl installation kit); with socket for Ø3.50" (Ø90 mm) push fit piping and Ø55 supply inlet; Matte Chrome cover caps	405.116.00.1	205.00
0000	Cover caps with leveling washer, Plastic, Alpine White	217.713.11.1	5.00
0.000	Acoustic insulation set for wall-hung toilets and bidets	156.050.00.1	15.00

### Bidet Seat Accessories for Geberit Duofix Carrier Frames

	Water supply hose for bidet seat for 111.728.00.1 carrier with Sigma concealed tanks 2x4. For adding bidet seat to an installed carrier. For complete installation order with 249.8	242.413.00.1	43.00
	Water supply hose for bidet seat for 111.355.00.5, 111.728.00.1 and 111.255.00.1 carriers with Sigma concealed tanks 2x6 and 2x4 and Kappa concealed tank. For adding bid seat to an installed carrier.	249.801.00.1 et	135.00
Required Accesso	ries for 3.50"-7.00" (9-18 cm) Finish	ed Wall Thickness	

#### Mounting rod extension set for 242.232.00.1 60.00 wall-hung toilet and bidet, M12 Mud guard protection housing 241.826.00.1 11.00 for Sigma concealed tanks 2x6 and 2x4, Plastic Extension set for actuator plates for 240.938.00.1 19.00 Sigma concealed tanks 2x6 and 2x4 and Kappa concealed tank HDPE Connector set for extended 152.438.46.1 50.00 installation and mounting hardware (bowl installation kit), with socket for Ø3.50" (Ø90 mm) push fit piping and Ø55 supply inlet; Matte Chrome cover caps 9000

LAVATORY

# **Systems for Wall-Hung Toilets, Pre-Wall Installations**

Model No.

115.999.21.1

115.942.11.1

115.942.KA.1

115.932.KA.1

115.932.GH.1

List Price

\$143.00

110.00

143.00

143.00

226.00

### **Dual-Flush Actuators**

**Dual-Flush Push Buttons** Dimensions: Round - 3.25" (8 cm) diameter

Material Finish

Plastic

Plastic

Plastic

Metal

Dimensions: 8.375" x 5.625" (21.1 cm x 14.2 cm)

Style	Material	Finish	Model No.	List Price
Kappa50	Metal	Brushed SS	115.258.00.1	\$226.00
	Die Cast	Alpine White	115.260.11.1	226.00
		Polished Chrome	115.260.21.1	226.00

Square - 4.25" x 4.25" (10.8 cm x 10.8 cm) Rectangle - 5.06" x 2.91" (12.9 cm x 7.4 cm)

#### Geberit Duofix Carrier Model No. Description

\$557.00	Carrier frame with Kappa concealed tank, pre-wall Installations	111.255.00.1
6 <sup>3</sup> /4" (171 mm) min. 35 <sup>11</sup> /16" (910 mm) (910 mm) (90 mm) 29 <sup>1</sup> /2" (90 mm) 29 <sup>1</sup> /2" (750 mm) (750 mm		IPT <sup>1</sup> /2" 29 <sup>3</sup> /4" 755 mm)
→ (48 mm) → 3 <sup>1</sup> / <sub>2</sub> " - 4 <sup>5</sup> / <sub>16</sub> " (90-110 mm)	→ 2 <sup>7</sup> /8" (73 mm) -	JPC ®

List Price

Refer to "Cover Plates for use with Push Buttons" on next page.

Brushed Chrome

Polished Chrome

Alpine White

Polish-Matte\*\*

Polish-Matte\*\*

Finishes follow this pattern = Frame-Button Polish = Polished Chrome Matte = Matte Chrome

### NOTES:

- Concealed tank shipped dual-flush ready
   Carrier for 2-hole washdown style wall-hung toilet fixtures only
   Refer to → geberit.us for latest list of code approved compatible toilet fixtures, including certified WaterSense combinations

Style

Round

Ø Square

 $\square$ 

Rectangle

TOIL FT

	CCESSOTIES ries for Geberit Duofix Carrier Frames		
Description		Model No.	List Price
ERREPAR	Frame to wall anchoring for 5.125"-7.875" (13-20 cm) thick unfinished pre-wall	111.815.00.1	\$30.00
Con a second	Frame to wall anchoring for 5.125"-7.875" (13-20 cm) thick unfinished pre-wall corner installations	111.835.00.1	30.00
	Support brackets for wall-hung toilets with small contact surface (thin profiles)	111.847.00.1	40.00
	Frame to wall anchoring where foot installations into floor are not allowed for 5.125"-7.875" (13-20 cm) thick unfinished pre-wall	111.867.00.1	61.00
	Frame to stud fastening set for extended stud spacing from 19.75"-25.56" (50-65 cm)	111.869.00.1	30.00
	Frame to wall anchoring extensions for 7.875"-15.75" (20-40 cm) thick unfinished pre-wall	111.887.00.1	11.00
Waste Fittings			
	HDPE straight connector with socket for Ø3.50" (Ø90 mm) push fit piping and Ø3.50" (Ø90 mm) outlet x 12" (31 cm) long	366.887.16.1	30.00
	HDPE connector with offset for LH horizontal drain connections (as viewed from sitting position), 1 x 90° bend with socket for Ø3.50" (Ø90 mm) push fit piping, with 45° offset and Ø3.50" (Ø90 mm) outlet for 5.5" (13.97 cm) minimum walls onl	366.913.16.1 y.	67.00
	HDPE connector with offset for RH horizontal drain connections (as viewed from sitting position), 1 x 90° bend with socket for Ø3.50" (Ø90 mm) push fit piping, with 45° offset and Ø3.50" (Ø90 mm) outlet for 5.5" (13.97 cm) minimum walls on	366.914.16.1 y.	67.00
	Cast iron outlet bend; 1 x 90° bend with socket for Ø3.50" (Ø90 mm) push fit piping and 3" CIP outlet	367.071.18.1	138.00
	HDPE "Back-to-back" connector for horizontal drain connections; 2 x 90° bends with sockets for Ø3.50" (Ø90 mm) push fit piping, with 45° offs and expansion to Ø4.375" (Ø110 mm)		138.00

for 10.75" (27.31 cm) minimum walls only.

HDPE "Back-to-back" connector

for vertical drain connections;

2 x 90° bends with sockets for

Ø3.50" (Ø90 mm) push fit piping and expansion to Ø4.375" (Ø110 mm) outlet for 10.75" (27.31 cm) minimum walls only.

#### Cover Plates for Use with Push Buttons Model No. List Price rice Description 115.680.11.1 \$85.00 Push Button Cover plate for Kappa Concealed Tank pre-wall Plastic, Alpine White Cover plate for Kappa Concealed 115.680.21.1 116.00 Tank pre-wall Plastic, Polished Chrome Bowl Connection Sets and Accessories for Finished Walls up to 3.5" (9 cm) Thick Connector Set what means with a cover caps 152.404.11.1 38.00 .00 HDPE; Alpine White cover caps HDPE connection set with 405.116.00.1 \$205.00 1" (2.5 cm) offset and mounting hardware (bowl installation kit); with socket for Ø3.50" (Ø90 mm) push fit piping and Ø55 supply inlet; .00 Matte Chrome cover caps Cover caps with leveling washer, 217.713.11.1 5.00 Plastic, Alpine White Acoustic insulation set for 156.050.00.1 15.00 wall-hung toilets and bidets **Bidet Seat Accessory for Geberit Duofix Carrier Frames** 7.00 Water supply hose for bidet seat 240.839.00.1 69.00 for 111.255.00.1 carrier with Kappa concealed tank pre-wall. For adding bidet seat to an installed carrier. For complete installation order with 249.801.00.1. Water supply hose for bidet seat for 249.801.00.1 135.00 111.355.00.5, 111.728.00.1 and 111.255.00.1 carriers with Sigma concealed tanks 2x6 and 2x4 and ~ 99 Øcto Kappa concealed tank. For adding bidet seat to an installed carrier. Required Accessories for 3.50"-7.00" (9-18 cm) Finished Wall Thickness Mounting rod extension set for 242.232.00.1 60.00 wall-hung toilet and bidet, M12 Extension set for actuator plates for 240.938.00.1 19.00 Sigma concealed tanks 2x6 and 2x4 and Kappa concealed tank HDPE Connector set for extended 50.00 152.438.46.1 installation and mounting hardware 138.00 (bowl installation kit), with socket for Ø3.50" (Ø90 mm) push fit piping and

Ø55 supply inlet; Matte Chrome cover caps

367.923.16.1

0<sub>000</sub>

Material Finish

Die Cast

Metal

Plastic

# **Systems for Wall-Hung Urinals**

Model No.

116.016.00.1

116.016.11.1

116.013.FW.1

116.012.11.1

116.012.21.1

Square - 5.125" x 5.125" (13 cm x 13 cm)

Customer supplied inlay Alpine White

Brushed SS

Alpine White

Polished Chrome

Actuators Dimensions:

Style

Sigma50

 $\square$ 

Mambo

Bolero

### **Optional Accessories**

Mounting Accessories for Geberit Duofix Carrier Frames

List Price	Description		Model No.	List Price
\$506.00 506.00	CR.CR.	Frame to wall anchoring for 5.125"-7.875" (13-20 cm) thick unfinished pre-wall	111.815.00.1	\$30.00
345.00	Carlos and a second	Frame to wall anchoring for 5.125"-7.875" (13-20 cm) thick unfinished pre-wall corner installations	111.835.00.1	30.00
		Frame to wall anchoring where foot installations into floor	111.867.00.1	61.00
299.00		are not allowed for		
299.00		5.125"-7.875" (13-20 cm) thick unfinished pre-wall		
	* h h h h	Frame to stud fastening set for extended stud spacing from 19.75"-25.56" (50-65 cm)	111.869.00.1	30.00
721.00	<i>b</i>	Frame to wall anchoring extensions for 7.875"-15.75" (20-40 cm) thick unfinished pre-wall	111.887.00.1	11.00
721.00	Urinal Connection	on Sets and Accessories		
	Ô	PE syphon trap with horizontal outlet and seal; Ø1.96" (Ø50 mm) outlet	152.983.00.1	31.00

# Hands Free Actuators

Dimensions: Square – 5.125	" x 5.125"	(13 cm x 13 cm)	

Mambo Metal	Brushed SS (Battery/DC Power)	116.033.FW.1	721.00	
		Brushed SS (AC Power – CLASS 2 power supply transformer included)	116.023.FW.1	721.00

### Geberit Duofix Carrier

Model No.	Description	List Price
111.625.00.1	Carrier frame with rough-in box	\$557.0
4 <sup>3</sup> / <sub>4</sub> " − 12 <sup>5</sup> / <sub>2</sub> " (120−320 mm) min. 3 <sup>1</sup> / <sub>2</sub> " (90 mm)	19 <sup>3</sup> /4" (500 mm) (75 mm) min. (75 mm) min. (75 mm) min. (75 mm) min. (170 - 370 mm) (170 - 370 mm)	→ 3 <sup>1</sup> /2" (90 mm) 39 <sup>1</sup> /2" - 46 <sup>1</sup> /2" (1000 - 1180 mm)
0 - 7 <sup>7</sup> /8"		FF 0 - 7 <sup>7</sup> /8" (0 - 200 mm)

NOTES:,

Carrier for 2-hole "Euro" style wall-hung urinal fixtures only
 ASSE 1001 Certified Atmospheric Vacuum Breaker included.

ASSE 1001 Certified Atmospheric Vacuum Breaker included.
 Refer to → geberit.us for latest list of Code approved Compatible urinal fixtures

5. Neren to Y genericus for latest list of Code approved Compatible Urinal

Y	Ø1.96" (Ø50 mm) outlet
	PE syphon trap with vertical outlet and seal; Ø1.97" (Ø50 mm) outlet

### Required Accessories for 3.50"-7.00" (9-18 cm) Finished Wall Thickness

quilled Accessor	
	Mounting rod extension set for wall-hung urinal, M8
	Mud guard protection housin and extension set for urinal

r wall-hung urinal, M8 lud guard protection housing 241.930.00.1 17.00 nd extension set for urinal carrier

152.984.00.1

242.318.00.1

31.00

40.00

# eberit In **Sys**


TOIL FT

GEBERIT INSTALLATION SYSTEMS

# **Systems for Wall-Hung Bidets**

Geberit D	Duofix Carrier	
Model No.	Description	List Price
111.520.00.1	Carrier frame, standard height	\$557.00
391/2" ♥ (1000 mm) _▽	19 <sup>3</sup> / <sub>4</sub> " (500 mm) (40 mm)	
FF V 0 - 7 <sup>7</sup> /8" (0 - 200 mm)		

Model No.	Description
111.524.00.1	Carrier frame, short height (matches 111.255.00.1)

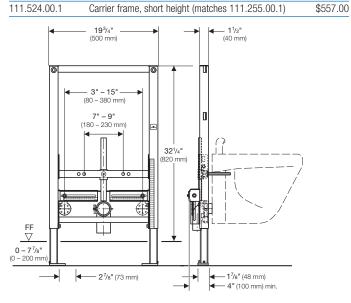

N		
	~ .	

Geberit Duofix Carrier for 2-hole wall-hung bidet fixtures only
 Refer to → geberit.us for latest list of Code approved Compatible bidet fixtures

Description		Model No.	List Price
AND	Frame to wall anchoring for 5.125"-7.875" (13-20 cm) thick unfinished pre-wall	111.815.00.1	\$30.00
ER NO VO	Frame to wall anchoring for 5.125"-7.875" (13-20 cm) thick unfinished pre-wall corner installations	111.835.00.1	30.00
	Frame to wall anchoring where foot installations into floor are not allowed for 5.125"-7.875" (13-20 cm thick unfinished pre-wall	111.867.00.1 )	61.00
h h h h	<ul> <li>Frame to stud fastening set for</li> <li>extended stud spacing from</li> <li>19.75"-25.56" (50-65 cm)</li> </ul>	111.869.00.1	30.00
b	Frame to wall anchoring extensions for 7.875"-15.75" (20-40 cm) thick unfinished pre-wall	111.887.00.1	11.00
	Elbow supply fitting set, Gun Metal	465.034.00.1	33.00
Bowl Connecti	on Accessories		
0, , , , , , , , , , , , , , , , , , ,	Acoustic insulation set for wall-hung toilets and bidets	156.050.00.1	15.00

	wall-hung toilets and bidets		
0000	Cover caps with leveling washer, Plastic, Alpine White	217.713.11.1	5.00

#### Required Accessories for 3.50"-7.00" (9-18 cm) Finished Wall Thickness


Mounting rod extension set for wall-hung toilet and bidet, M12	242.232.00.1	60.00

TOLLET


List Price

# **Systems for Wall-Hung Lavatories**

# Geberit Duofix Carrier

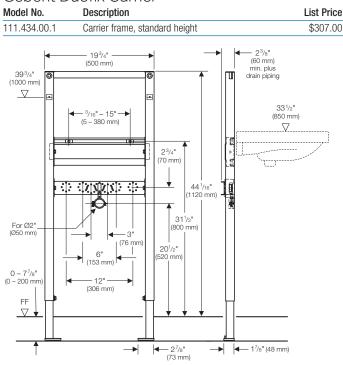

#### Model No. Description List Price 111.490.00.1 Carrier frame, short height (matches 111.255.00.1) \$307.00



### NOTES:

Geberit Duofix Carrier for 2-hole wall-hung lavatory fixtures only
 Refer to → geberit.us for latest list of Code approved Compatible lavatory fixtures

### **Optional Accessories**

Mounting Accessories for Geberit Duofix Carrier Frames

Description		Model No.	List Price
CRACE RANK	Frame to wall anchoring for 5.125"-7.875" (13-20 cm) thick unfinished pre-wall	111.815.00.1	\$30.00
Contraction of the second s	Frame to wall anchoring for 5.125"-7.875" (13-20 cm) thick unfinished pre-wall corner installations	111.835.00.1	30.00
	Frame to wall anchoring where foot installations into floor are not allowed for 5.125"-7.875" (13-20 cm) thick unfinished pre-wall	111.867.00.1	61.00
IN THE	Fastening set for sinks with 14.9"-22.8" (38-58 cm) mounting centers	111.868.00.1	103.00
	Frame to stud fastening set for extended stud spacing from 19.75"-25.56" (50-65 cm)	111.869.00.1	30.00
	Frame to wall anchoring extensions for 7.875"-15.75" (20-40 cm) thick unfinished pre-wall	111.887.00.1	11.00
© \$2,, ©©	Elbow supply fitting set, Gun Metal	465.034.00.1	33.00

#### Lavatory Connection Accessories

	Cover caps with leveling washer,	217.713.11.1	5.00
CCC	Cover caps with leveling washer, Plastic, Alpine White		

### Required Accessories for 3.50"-7.00" (9-18 cm) Finished Wall Thickness



Mounting rod extension set for 242.233.00.1 40.00 wall-hung lavatory, M10

TOIL FT

# **Geberit Flushing System**



Safely hidden behind the wall, Geberit's in-wall technology creates clean lines to show unique beauty from floor to ceiling. The concealed tank with actuator in-wall technology enables plumbing fixtures to be mounted without the cumbersome tank – providing a clean, refined look that enhances design.

"Behind-the-wall" does not mean "out of reach." The fill and flush valves and the supply stop are hidden from sight, yet these components are easily accessible through elegant actuator flush panels from Geberit for tool-free maintenance.

Available in single- and dual-flush options.

# **Geberit Concealed Tank for Floor Mounted, Back Outlet, 2x6 Installations**

# **Dual-Flush Actuators**

Dimensions: 9 75" x 6 5" (24 6 cm x 16 4 cm)

Style	Material	Finish	Model No.	List Price
Bolero	Plastic	Alpine White	115.777.11.1	\$108.00
		Polished Chrome	115.777.21.1	140.00
		Matte Chrome	115.777.46.1	140.00
Sigma01	Plastic	Alpine White	115.770.11.5	80.00
m		Polished Chrome	115.770.21.5	108.00
9		Matte Chrome	115.770.46.5	108.00
		Star White	115.770.FR.5	80.00
Sigma20	Metal	Br Ni-Polish-Br Ni*	115.778.ID.1	225.00
		Br SS-Polish-Br SS*	115.778.SN.1	226.00
00		Br Ni-Polish-Br Ni* Vandal Resistant	115.781.ID.1	260.00
		Br SS-Polish-Br SS* Vandal Resistant	115.781.SN.1	260.00
	Plastic	Polish-Matte-Polish*	115.778.KH.1	167.00
		White-Polish-White*	115.778.KJ.1	116.00
		Black-Polish-Black*	115.778.KM.1	143.00
Sigma50	Die Cast	Customer supplied inlay	115.788.00.1	334.00
$\square$		Alpine White	115.788.11.1	334.00
		Black	115.788.DW.1	334.00
		Brushed Chrome	115.788.GH.1	431.00
		White Pattern Glass	115.788.SC.1	431.00
		Smoke Glass	115.788.SD.1	431.00
		Green Satin Glass	115.788.SE.1	431.00
Sigma60	Die Cast	Complete Rough-in and Trim Set	115.792.GH.1	556.00
		Rough-In Set***	115.795.21.1	167.00
		Brushed Chrome Trim Set***	115.796.GH.1	389.00

# Single-Flush Actuators

Dimensions: 9.75" x 6.5" (24.6 cm x 16.4 cm) Tango

)	Die Cast	Alpine White	115.760.11.1	221.00
1	Polished Chrome	115.760.21.1	221.00	
		Matte Chrome	115.760.46.1	221.00
		Oil Rubbed Bronze	115.760.HM.1	372.00
		ForeverShine™ PVD Polished Nickel	115.760.IB.1	372.00
		ForeverShine™ PVD Brushed Nickel	115.760.ID.1	372.00

Hands Free Actuators
Dimensions: 0.75" x 6.5" (24.6 cm x 16.4 cm)

Dimensio	15: 9.75	X 0.5 (24.0 CIII X 10.4 CIII)		
Mambo	Metal	Brushed SS (AC Power) <sup>++</sup>	115.890.00.1	721.00
		See page 7 for transformers for AC	power.	
		Brushed SS (Battery/DC Power)	115.891.00.1	721.00
-				

Finishes follow this pattern = Plate-Ring-Button \*\* Finishes follow this pattern = Frame-Button

Polish = Polished Chrome

Matte = Matte Chrome Br SS = Brushed Stainless Steel

Br Ni = Brushed Nickel

\*\*\* Rough-in Set and Trim Set can be ordered separately. Both sets needed for installation.

† New product name or model number. Available May 1, 2013. 11 Requires 230 V, 50 Hz or transformer to 120 V, 60 Hz. Suggested accessory 115.861.00.1.

### **Dual-Flush Push Buttons**

Dimensions: Round - 3.25" (8 cm) diameter Square - 4.25" x 4.25" (10.8 cm x 10.8 cm) Rectangle - 5.06" x 2.91" (12.9 cm x 7.4 cm)

Style	Material	Finish	Model No.	List Price
Round	Plastic	Polished Chrome	115.999.21.1	\$143.00
Ø				
Square	Plastic	Alpine White	115.942.11.1	110.00
D		Polish-Matte**	115.942.KA.1	143.00
Rectangle	Plastic	Polish-Matte**	115.932.KA.1	143.00
	Metal	Brushed Chrome	115.932.GH.1	226.00

### Single-Flush Push Buttons Dimensions: Round - 2.5" (6.2 cm) diameter


### Square - 4.25" x 4.25" (10.8 cm x 10.8 cm)

Round	Plastic	Alpine White	115.114.11.1	94.00
Ø		Polished Chrome	115.114.21.1	110.00
	Metal	Brushed SS	115.114.FW.1	226.00
Square	Plastic	Alpine White	115.941.11.1	94.00
D		Polish-Matte**	115.941.KA.1	143.00

Refer to Cover Plates for use with Buttons" on next page.

# Concealed Tank

Model No.	Description	List Price
109.304.00.5	Sigma concealed tank 2x6 installations	\$374.00



NOTES:

- 1.
- Concealed tank shipped dual-flush ready Tank for floor-mounted, back outlet washdown style toilet fixtures only Refer to → geberit.us for latest list of code approved compatible toilet fixtures, including 3
- certified WaterSense combinations

	CCESSORIES harge Configurations			Transformers for A	C Power		
				Description		Model No.	List Price
					Transformer for Mambo AC powered hands free actuator.	115.861.00.1	\$100.00
				Cover Plates for us	se with Push Buttons		
A. Floor-Mount Rear Discharge into W	all Discharge into Floor				Cover plate for Sigma concealed tanks 2x6 and 2x4. Die Cast, Alpine White	115.765.11.1	228.00
Waste Fittings (Not Description	te: Mounting collar/clamp by installer)	Model No.	List Price		Cover plate for Sigma concealed	115.765.46.1	228.00
	HDPE waste fitting outlet bend, 1 x 90° bend with socket for	366.061.16.1	\$19.00		tanks 2x6 and 2x4. Die Cast, Matte Chrome	115.705.40.1	220.00
(For A discharge)	Ø3.50" (Ø90 mm) push fit piping and Ø3.50" (Ø90 mm) outlet				Cover plate for Sigma concealed tanks 2x6 and 2x4. Metal,	115.798.00.1	180.00
	HDPE connector with offset for LH horizontal drain connections (as viewed from sitting position), 1 x 90° bend with socket for Ø3.50"	366.913.16.1	67.00	Paguirad Assessor	Brushed SS	od Woll Thickno	
(For A discharge)	(Ø90 mm) push fit piping, with 45° offset and Ø3.50" (Ø90 mm) outlet for 5.5" (13.97 cm) minimum walls on!	у.		Required Accessor	ies for 3.50"–7.00" (9–18 cm) Finish Mud guard protection housing for Sigma concealed tanks 2x6 and 2x4, Plastic	241.826.00.1	\$11.00
	HDPE connector with offset for RH horizontal drain connections (as viewed from sitting position), 1 x 90° bend with socket for Ø3.50" (Ø90 mm) push fit piping, with 45° offset and Ø3.50" (Ø90 mm) outlet	366.914.16.1	67.00	144 144 144	Extension set for actuator plates for Sigma concealed tanks 2x6 and 2x4 and Kappa concealed tank	240.938.00.1	19.00
(For A discharge	for 5.5" (13.97 cm) minimum walls only	у.		$\sim$	HDPE Connector set for extended installation and mounting	152.438.46.1	50.00
(For A discharge)	Cast iron outlet bend; 1 x 90° bend with socket for Ø3.50" (Ø90 mm) push fit piping and 3" CIP outlet	367.071.18.1	138.00	6090 6090	hardware (bowl installation kit), with socket for Ø3.50" (Ø90 mm) push fit piping and Ø2.16" (Ø55 mm) supply inlet; Matte Chrome cover caps		
(For A discharge)	HDPE "Back-to-back" connector for horizontal drain connections; 2 x 90° bends with sockets for Ø3.50" (Ø90 mm) push fit piping, with 45° offs and expansion to Ø4.375" (Ø110 mm) for 10.75" (27.31 cm) minimum walls of	outlet	138.00				
(For A discharge)	HDPE "Back-to-back" connector for vertical drain connections; 2 x 90° bends with sockets for Ø3.50" (Ø90 mm) push fit piping and expansion to Ø4.375" (Ø110 mm) outle for 10.75" (27.31 cm) minimum walls of		138.00				
(For A or B discharge)	PP connector set with bend for Floor-Mount toilets with mounting hardware, 1 x 90° bends with socket for Ø4.375" (Ø110 mm) push fit piping for Ø3.82"–4.21" (Ø97–107 mm) male connection and expansion to Ø4.375" (Ø110 mm) outlet	152.647.00.1	103.00				

# Geberit Monolith

.......

Duravit "Starck 3" toilet with Geberit Monolith in White Glass The Geberit Monolith radically alters the look of the toilet tank while offering all the advantages of Geberit in-wall systems. As a slim and attractive alternative to a typical toilet tank, the Geberit Monolith is secured to the wall and can be adapted to any bathroom or powder room.

Showcasing the latest water-conserving technology, the Geberit Monolith uses a dual-flush mechanism that is built into the top of the housing. The system's large and small levers offer two water-saving flush choices: 1.6 GPF (6 LPF) and 0.8 GPF (3 LPF), respectively.

The Geberit Monolith modular structure is made of high-quality materials, and is available with black or white tempered glass. All valves are easily accessible for simple maintenance. The Geberit Monolith housing hides the toilet tank, as well as the fill and flush valves, for a sleek, modern look.

Catalano "Verso" toilet with Geberit Monolith in Black Glass

# System for **Floor-Mount Toilets**

### Geberit Monolith

Model Number	Description	List Price
131.144.SF.1	Geberit Monolith for floor-mounted toilets, White Glass with Duravit Starck 3 WC and Seat/Lid	\$1,185.00
131.144.SG.1	Geberit Monolith for floor-mounted toilets, Black Glass with Duravit Starck 3 WC and Seat/Lid	1,185.00
Consists of: (1) Geberit Monolith (1) Geberit Toilet Ou	131.126.xx.1 (SF=white; SG=black) ıtlet 131.127.29.1	

(1) Duravit Starck 3 Floor Mounted Elongated Toilet, White 131.128.11.1 (Duravit 215809) (1) Soft Close Seat and Lid for Duravit Starck 3 131.142.11.1 (Duravit 006339)


131.145.SF.1	Geberit Monolith for floor-mounted toilets, White Glass with Outlet	500.00
131.145.SG.1	Geberit Monolith for floor-mounted toilets, Black Glass with Outlet	500.00

Consists of:

(1) Geberit Monolith 131.126.xx.1 (SF=white; SG=black)

(1) Geberit Toilet Outlet 131.127.29.1 Mates with Duravit Starck 3 Floor Mounted Elongated Toilet, White 215809 (sold separately) Contact Duravit.


Mates with any Seat and Lid for Duravit Starck 3 Elongated (sold separately) Contact Duravit.

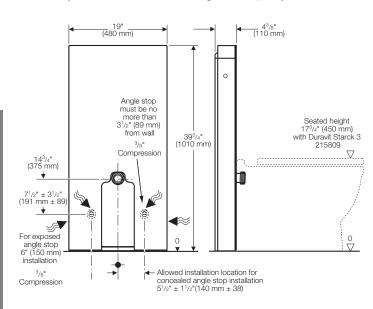

# **System for Wall-Hung Toilets**

### Geberit Monolith

Model No.	Description	List Price
131.028.SI.1	Geberit Monolith for wall-hung toilets, White Glass	\$1,236.00
131.028.SJ.1	Geberit Monolith for wall-hung toilets, Black Glass	1,236.00



1900 ×

NOTES:

Concealed tank shipped dual-flush ready 1.

2

Geberit Monolith for 2-hole washdown style wall-hung toilet fixtures only Refer to → geberit.us for latest list of code approved compatible toilet fixtures, including 3 certified WaterSense combinations

# **Optional Accessories**

Mounting Accessories for Geberit Monolith Des

scription		Model No.	List Price
	Support brackets for wall-hung toilets with small contact surface (thin profiles		\$40.00

#### **Bowl Connection Sets and Accessories**



The information and pricing contained in this document is subject to change without notice.

# Geberit Bath Waste & Overflow Systems

# **Trim Finishes and Rough-In Unit Materials**

# It's Geberit It's Cable-Operated

Unlike other styles of bath drains, the Geberit Bath Waste & Overflow (BWO) critical working parts are outside the waterway and away from the flow of water to prevent clogging. The high quality cable is crafted from Teflon® coated stainless steel and has a plastic sleeve to deliver years of trouble-free service.

#### **Styles to Meet Your Needs**

PushControl BWO The Geberit PushControl BWO offers a thin, elegant look.

### Traditional TurnControl BWO

The Geberit "original" was first-to-market over 25 years ago.

### Cascading Tub Filler BWO

An integrated system that combines the functionality of filling and draining into one component.

### Euro TurnControl BWO

Stylish with a distinctive contour, the Geberit Euro TurnControl BWO delivers.







#### Selecting a trim finish

The distinctive contoured handles are offered in a wide variety of finishes to match almost any décor. ForeverShine<sup>™</sup> finishes have been developed to ensure that the quality and look of the product on which it is applied will last a lifetime. Clean up is simple and requires no abrasive cleansers or chemicals so maintaining the initial factory finish is easy.

We are so confident of this finish process that we provide a limited lifetime warranty on ForeverShine<sup>™</sup> products installed in residential applications.

Finish	Metal	Plastic
Alpine White (11)		
Polished Chrome (21)		
Gold (45)		
Bone (AA)		
White (DY)		
Biscuit (FF)		
Antique Brass (97)		
Old Silver Pewter (98)		
Satin Brass (CH)		
Black (EK)		
Satin Chrome (FT)		
ForeverShine <sup>™</sup> PVD Brass (GG)		
ForeverShine <sup>™</sup> PVD Pearl Nickel (HD)		
ForeverShine <sup>™</sup> PVD Satin Sheen (HI)		
ForeverShine <sup>™</sup> PVD Platinum (HJ)		
Hard Coat Oil Rubbed Bronze (HM)		
ForeverShine <sup>™</sup> PVD Polished Nickel (IB)		
ForeverShine <sup>™</sup> PVD Brushed Nickel (ID)		

### **Material Selection**

Tubular Plastic

Plastic (polypropylene) is used chiefly for molded parts, electrical insulation, packaging.

### Tubular Brass

Brass is a yellowish alloy of copper and zinc used for enhancing items such as the Geberit BWO.



### ABS

ABS (Acrylonitrile, Butadiene, Styrene) is a plastic that's hard and durable through a broad range of temperatures.



PVC

PVC, polyvinyl chloride, a widely used thermoplastic polymer, is tough, dentresistant; and maintains properties over long periods of time.



#### **Selecting a Remote**

The Geberit Remote BWO Cable Drain features the same quality and performance as our full line of bath waste and overflow products, but with remote access possibilities. Its unique two-headed design gives you the flexibility of handle placement for ADA applications.



#### Joints

Slip joints are used when the drain will be accessible for maintenance. Glued joints are used for non-accessible drains. Geberit supplies tubing for slip connections with their BWOs, but does NOT supply ABS/PVC piping for glued connections.

# Selecting the Right Size Bath Waste & Overflow


For convenience, use this page when sizing your cable length.

Sizing a Geberit cable drain is simple and easy. Start with acquiring the **Tub Depth** (see **Figure 1**), which serves as a rough guide for your final selection. While the actual definition of "tub depth" varies by manufacturer and model, the measurement is used to get a rough idea of the cable length you will need. Use the **Standard Rough-In Unit Cable Lengths** chart (below, right) to determine that cable length based on your tub depth.

To assure your rough calculations are correct and your BWO will function properly, however, please follow these steps (refer to **Figure 1**).

- 1. Determine the **Overflow Depth (A)** which is the distance from the overflow center to drain mounting surface.
- 2. Determine the **Drain Shoe Length (B)** which is the distance from the drain centerline to the overflow mounting surface.
- 3. Choose material and joint connection type. Because material selection and joint preparations selection are covered by local codes, be sure a professional contractor is involved. Geberit offers the complete spectrum of BWO materials to assure Code Compliance (see page 23). The materials offered are Tubular Polypropylene, Tubular Brass, ABS and PVC.
- 4. To determine the final size of your BWO for Tubular Slip-Joint Plastic/Brass cable drain, use Figure 2 on page 25. To determine the final size of your BWO for glued ABS/PVC cable drain, use Figure 3 on page 25.
- Your information can now be used to find the **part number** on each type of Geberit BWO.

Once you have determined the size and part number, you can also give this information to your sales outlet so they can verify you have the right Geberit model for your needs.

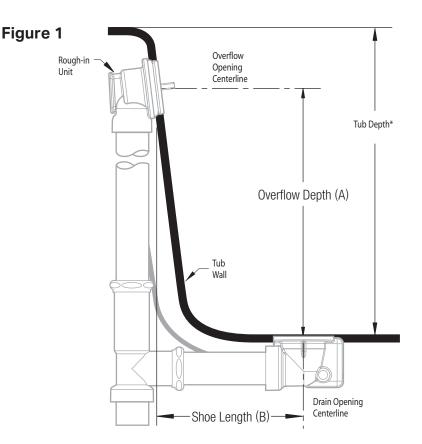

### Standard Rough-In Unit Cable Lengths

Кеу	Typical Tub Depth*	Cable Length
	12"–16" (301–402)	17" (432)
	17"–24" (427–602)	27" (678)
	17"–24" (427–602)	33" (828)
	25"–29" (628–728)	43" (1,079)
	30" (753)	59" (1,481)
	00 (100)	00 (1,10

Geberit makes it easy to select the right drain with the online Bath Drain Selector, → geberit.us.com/drain\_selection.php. Simply select a particular manufacturer and model number, bathtub size and the roughin material.

\* Varies by manufacturer and model number

Non-standard sizes, please refer to www.geberit.us

### Figure 2

### Standard Tubular Slip Joint Rough-In Unit Cable Length Configuration Guide

Use this chart to figure cable needed for Plastic/Brass standard Tubular installations.

#### Example:


(A) Overflow Depth = 14"

B Drain Shoe Length = 7.5"
 Requires a Rough-In Unit with a cable

length of 27".

Custom installations can be achieved using standard Tubular Rough-In Units provided cable length is within acceptable range illustrated by shaded areas in guide.

Geberit recommends you review any custom installations with your sales outlet to assure you have the right model for your needs.

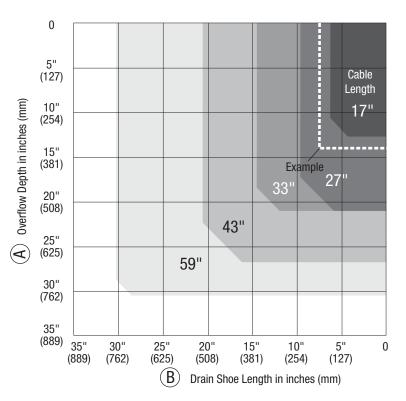

### Figure 3 ABS/PVC Glued Rough-In Unit Cable Length Configuration Guide\*

Use this chart to figure cable length needed for ABS/PVC glued custom installations.

Shaded areas indicate acceptable range of measurements for each cable length.


### Example:

A Overflow Depth = 22.5"

(B) Drain Shoe Length = 12.5" Requires a Rough-In Unit with a cable length of 43".

Geberit recommends you review any custom installations with your sales outlet to assure you have the right model for your needs.

\* ABS/PVC pipes not supplied

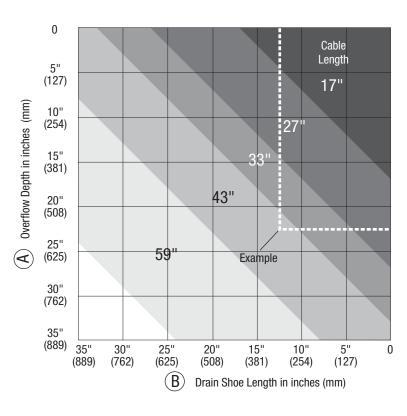

GEBERIT BATH WASTE AND OVERFLOW SYSTEMS

R

# **TurnControl BWO Systems**

# TurnControl Rough-In Unit

Does not include Trim Kit (see page 28) (Fits Tub Wall Thickness 1/16"–5/16") (Figs. A & B)

Description	Model No.	Tub Depth*	Cable Length	Overflow Drain Sho Depth Length	e List Price		
Tubular Plastic Rough-In (Fig. A)	151.501.00.1	12"–16"	17"		\$66.00		
1½" Tubular plastic slip joint with	151.504.00.1	17"-24"	27"		71.00		
PVC Tee connection	151.508.00.1	17"–24"	33"		78.00		
	151.512.00.1	25"-29"	43"		93.00		
	151.515.00.1	30"	59"	Use Figure 2	103.00		
Tubular Brass Rough-In (Fig. A) 1½" Tubular Brass slip joint with Brass Tee connection	151.450.00.1	17"–24"	27"	– on page 25	339.00		
Tubular Brass Rough-In (Fig. A) Brass Chicago Code Tee	151.460.00.1	17"–24"	27"	_	339.00		
ABS Rough-In (Fig. B)	151.502.00.1	12"–16"	17"		66.00		
11/2" ABS Sch 40 for glued joint	151.505.00.1	17"–24"	27"		71.00		
Pipes not supplied)	151.510.00.1	17"–24"	33"		78.00		
	151.513.00.1	25"-29"	43"		93.00		
	151.516.00.1	30"	59"	Use Figure 3	103.00		
PVC Rough-In (Fig. B)	151.503.00.1	12"-16"	17"	on page 25	66.00		
11/2" PVC Sch 40 for glued	151.506.00.1	17"–24"	27"	_	71.00		
oint. (Pipes not supplied)	151.511.00.1	17"–24"	33"		78.00		
	151.514.00.1	25"-29"	43"		93.00		
	151.517.00.1	30"	59"	-	103.00		



JPO .

UPC

Rough-In Unit




Fig. A Tubular Rough-In Unit



# TurnControl Remote Control Rough-In Unit

Does not include Trim Kit (see page 28) (Figs. C & D)


Model No.	Tub Depth*	Cable Length	Overflow Depth	Drain Shoe Length	e List Price		
151.518.00.1	17"–24"	59"	—	_	\$163.00		
151.519.00.1	17"–24"	59"	—	—	163.00		
151.520.00.1	17"–24"	59"	—	—	163.00		
	Model No. 151.518.00.1 151.519.00.1	Tub           Model No.         Depth*           151.518.00.1         17"–24"           151.519.00.1         17"–24"	Tub Depth*         Cable Length           151.518.00.1         17"–24"         59"           151.519.00.1         17"–24"         59"	Tub Depth*         Cable Length         Overflow Depth           151.518.00.1         17"-24"         59"            151.519.00.1         17"-24"         59"	Tub Depth*         Cable Length         Overflow Depth         Drain Shoe Length           151.518.00.1         17"-24"         59"         —         —         —           151.519.00.1         17"-24"         59"         —         —         —		

### TurnControl Rough-In Unit (Non-Standard)

Does not include Trim Kit (see page 28) (Fits Tub Wall Thickness 1/16"-5/16") (Fig. A) Oable Overflow Tech Ducin Chas Lind

Description	Model No.	Depth*	Length	Depth	Length	e List Price
Tubular Plastic Rough-In (Fig. A)	150.183.00.1	17"–24"	33"	30.50"	20.50"	\$102.00
(Non-Standard)	150.184.00.1	25"–29"	43"	30.50"	30.00"	114.00
Fully detailed information can be found at → <b>geberit.us</b>						

\* Tub Depth is only a rough calculation. To ensure proper cable length, refer to information on pages 24 and 25.




ABS/PVC Remote Control Rough-In Unit

### TurnControl Complete Unit

Includes Trim Kit and Tubular Plastic Rough-In Unit (Fits Tub Wall Thickness 1/16"–5/16") (Figs. E & F)

Material	Finish	Tub Depth*	Cable Length	Overflow Depth	Drain Shoe Length	Traditional Model No. (Fig. E)	List Each	Euro Model No. (Fig. F)	() List Each
Metal	ForeverShine <sup>™</sup> PVD Brushed Nickel	17"–24"	27"			150.176.ID.1	\$216.00	—	—
	Polished Chrome	17"–24"	27"			—		151.521.21.1	\$111.00
	Hard Coat Oil Rubbed Bronze	17"–24"	27"			—	—	151.521.HM.1	141.00
	Forevershine <sup>™</sup> PVD Polished Nickel	17"–24"	27"	Use	Figure 2	—	—	151.521.IB.1	138.00
	Forevershine <sup>™</sup> PVD Brushed Nickel	17"–24"	27"	on	bage 25	—	—	151.521.ID.1	138.00
Plastic	Polished Chrome	17"–24"	27"			150.156.21.1	126.00	151.531.21.1	86.00
	White	17"–24"	27"		_	150.156.DY.1	131.00		
	Biscuit	17"-24"	27"	_	_	150.156.FF.1	131.00		
									Up
Include Metal	s Trim Kit and ABS Pipe Rough- Polished Chrome	17"–24"	27"	_		g. G) —		151.522.21.1	\$111.00
				Use	Figure 2	<u> </u>		151.522.21.1 151.522.HM.1	
	Polished Chrome	17"–24"	27"	Use		_			\$111.00
-	Polished Chrome Hard Coat Oil Rubbed Bronze	17"–24" 17"–24"	27" 27"	Use	Figure 2		_	151.522.HM.1	\$111.00 141.00
Metal	Polished Chrome Hard Coat Oil Rubbed Bronze Forevershine™ PVD Polished Nickel	17"–24" 17"–24" 17"–24" 17"–24"	27" 27" 27" 27"	Use on p	Figure 2 page 25		_	151.522.HM.1 151.522.IB.1	\$111.00 141.00 138.00
Metal	Polished Chrome Hard Coat Oil Rubbed Bronze Forevershine™ PVD Polished Nickel Forevershine™ PVD Brushed Nickel	17"–24" 17"–24" 17"–24" 17"–24"	27" 27" 27" 27"	Use on p	Figure 2 page 25		_	151.522.HM.1 151.522.IB.1	\$111.00 141.00 138.00 138.00
Metal	Polished Chrome Hard Coat Oil Rubbed Bronze Forevershine™ PVD Polished Nickel Forevershine™ PVD Brushed Nickel s Trim Kit and PVC Pipe Rough-	17"–24" 17"–24" 17"–24" 17"–24" In Unit (Fit	27" 27" 27" 27" s Tub Wall	Use on p Thickness	Figure 2 page 25		_	151.522.HM.1 151.522.IB.1 151.522.ID.1	\$111.00 141.00 138.00 138.00
Metal	Polished Chrome Hard Coat Oil Rubbed Bronze Forevershine™ PVD Polished Nickel Forevershine™ PVD Brushed Nickel s Trim Kit and PVC Pipe Rough- Polished Chrome	17"-24" 17"-24" 17"-24" 17"-24" In Unit (Fit 17"-24"	27" 27" 27" 27" s Tub Wall 27"	Thickness	Figure 2 page 25 1/16"–5/16") (Fi		_	151.522.HM.1 151.522.IB.1 151.522.ID.1 151.523.21.1	\$111.00 141.00 138.00 138.00 138.00 111.00

Note: ForeverShine™ finishes ensure the quality and look of your Geberit BWO will last a lifetime. Geberit offers a limited lifetime warranty on ForeverShine™ products installed in residential applications. \* Tub Depth is only a rough calculation. To ensure proper cable length, refer to information on pages 24 and 25.

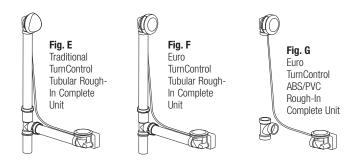

# TurnControl BWO Systems (continued)

### TurnControl Trim Kit – Includes Handle and Plunger

		Model No.			
		$\bigwedge$		$\bigcirc$	
Material	Finish	Traditional Li	ist Price	Euro I	List Price
Metal	Polished Chrome	151.551.21.1	\$93.00	151.553.21.1	\$63.00
	Hard Coat Oil Rubbed Bronze	151.551.HM.1	146.00	151.553.HM.1	94.00
	ForeverShine <sup>™</sup> PVD Polished Nickel	151.551.IB.1	141.00	151.553.IB.1	90.00
	ForeverShine <sup>™</sup> PVD Brushed Nickel	151.551.ID.1	141.00	151.553.ID.1	90.00
	Gold	151.551.45.1	172.00		
	Antique Brass	151.551.97.1	132.00		
	Old Silver Pewter	151.551.98.1	132.00		
	Satin Brass	151.551.CH.1	132.00		
	Black	151.551.EK.1	146.00		
	Satin Chrome	151.551.FT.1	132.00		
	ForeverShine <sup>™</sup> PVD Brass	151.551.GG.1	132.00		
	ForeverShine <sup>™</sup> PVD Pearl Nickel	151.551.HD.1	151.00		
	ForeverShine <sup>™</sup> PVD Satin Sheen	151.551.HI.1	132.00		
	ForeverShine <sup>™</sup> PVD Platinum	151.551.HJ.1	151.00		
Plastic	Alpine White	151.550.11.1	55.00		
	Gold	151.550.45.1	119.00		
	Polished Chrome	151.550.21.1	55.00	151.552.21.1	38.00
	Bone	151.550.AA.1	61.00		
	White	151.550.DY.1	61.00		
	Biscuit	151.550.FF.1	61.00		
	ForeverShine <sup>™</sup> PVD Brass	151.550.GG.1	119.00		



Traditional Metal Handle





Euro Metal Handle




Plunger

# TurnControl, Remote Control Trim Kit

Order Two Trim Kits in desired finish.

### **TurnControl Accessories**

Description	Model No.	List Price
ADA Handle Extension, Polished Chrome For Metal Handles Only	241.789.21.1	\$25.00
Test Plug Kit	240.691.00.1	26.00
Extended Tub Wall Thickness Kit 3/8"–1/2", Tubular Plastic/Brass Rough-In	241.769.00.1	40.00
Extended Tub Wall Thickness Kit 3/8"–1/2", ABS/PVC Rough-In	241.771.00.1	40.00
Extended Tub Wall Thickness Kit 3/8"–1/2", Tub Filler	241.772.00.1	40.00
Extended Tub Wall Thickness Kit 9/16"–3/4", Tubular/Brass Rough-In	241.773.00.1	40.00
Extended Tub Wall Thickness Kit 9/16"–3/4", ABS/PVC Rough-In	241.774.00.1	40.00
Extended Tub Wall Thickness Kit 9/16"–3/4", Tub Filler	241.775.00.1	40.00





# **PushControl BWO Systems**

# PushControl Complete Unit

Includes Trim Kit, Tubular Plastic Rough-In Unit and Installation Tools (Fits Tub Wall Thickness 1/16"–1/2")

(1100 100		110 112)					0.00
Material	Finish	Model No.	Tub Depth*	Cable Length	Overflow Depth	Drain Shoe Length	List Price
Metal	Polished Chrome	151.603.21.1	17"–24"	27"			\$212.00
		151.605.21.1	17"–24"	33"			228.00
	ForeverShine™	151.603.ID.1	17"–24"	27"		igure 2	266.00
	PVD Brushed Nickel	151.605.ID.1	17"–24"	33"	on p	age 25	281.00
Plastic	Polished Chrome	151.602.21.1	17"–24"	27"			160.00
		151.604.21.1	17"–24"	33"			175.00



UPC

PushControl Toolkit

\* Tub Depth is only a rough calculation. To ensure proper cable length, refer to information on pages 24 and 25.

### PushControl Accessories

Description	Model No.	List Price
PushControl Toolkit (Included with purchase of each PushControl Complete Unit)	241.729.00.1	\$31.00

Note: ForeverShine™ finishes ensure the quality and look of your Geberit BWO will last a lifetime. Geberit offers a limited lifetime warranty on ForeverShine™ products installed in residential applications.

# **TurnControl BWO with Cascading Tub Filler Systems**

Material	Finish	Model No.	Tub Depth*	Cable Length	Overflow Depth	Drain Shoe Length	Tub Wall Thickness	List Price	Filler, Trac TurnCont
Metal	Polished Chrome	151.466.21.1	17"–24"	27"			1/16"—5/16"	\$847.00	Complete
		151.467.21.1	17"–24"	27"			3/8"-1/2"	847.00	
		151.468.21.1	17"–24"	27"			9/16"-3/4"	847.00	
	ForeverShine™	151.466.GG.1	17"–24"	27"	llee	Figure 0	1/16"—5/16"	928.00	R C
	PVD Brass	151.467.GG.1	17"–24"	27"		Figure 2 - age 25 _	3/8"-1/2"	928.00	
		151.468.GG.1	17"–24"	27"	- 0116	.ugo 20	9/16"-3/4"	928.00	U
	ForeverShine™	151.466.ID.1	17"–24"	27"			1/16"—5/16"	928.00	
	PVD Brushed Nickel	151.467.ID.1	17"–24"	27"			3/8"-1/2"	928.00	
		151.468.ID.1	17"-24"	27"			9/16"-3/4"	928.00	

\* Tub Depth is only a rough calculation. To ensure proper cable length, refer to information on pages 24 and 25.

# Cascading Tub Filler, TurnControl ADA Handle Extension – For Metal Handles Only

Description	Model No.	List Price
ADA Handle Extension, Polished Chrome	241.789.21.1	\$25.00

Note: ForeverShine™ finishes ensure the quality and look of your Geberit BWO will last a lifetime. Geberit offers a limited lifetime warranty on ForeverShine™ products installed in residential applications.



# **Limited Warranty**

LIMITED WARRANTY - The Company offers limited warranties regarding certain of its products. Such limited warranties can be found in the Company's catalogs and on its website at -> geberit.us. THE COMPANY SHALL NOT BE LIABLE TO BUYER, OR TO ANYONE CLAIMING UNDER BUYER, FOR ANY OTHER OBLIGATIONS OR LIABILITIES, INCLUDING, BUT NOT LIMITED TO, OBLIGATIONS OR LIABILITIES ARISING OUT OF BREACH OF CONTRACT OR WARRANTY, NEGLIGENCE OR OTHER TORT OR ANY THEORY OF STRICT LIABILITY, WITH RESPECT TO THE PRODUCTS OR THE COMPANY'S ACTS OR OMISSIONS OR OTHERWISE. THE COMPANY AND BUYER AGREE THAT THE EXPRESS WARRANTIES DESCRIBED ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES. ALL OTHER EXPRESS WARRANTIES ARE DISCLAIMED. FOR COMMERCIAL PRODUCTS, ALL WARRANTIES IMPLIED BY LAW, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE DISCLAIMED. FOR CONSUMER PRODUCTS, WARRANTIES IMPLIED BY LAW, INCLUDING THOSE OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE EXPRESSLY LIMITED TO THE PERIOD OF THE EXPRESS LIMITED WARRANTY FOR THE RELEVANT PRODUCT. Some States do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to Buyer. IN NO EVENT SHALL THE COMPANY BE LIABLE FOR INCIDENTAL, CONSEQUENTIAL, INDIRECT OR SPECIAL DAMAGES, THE COMPANY'S AGGREGATE LIABILITY WITH RESPECT TO A DEFECTIVE PRODUCT AND THIS CONTRACT SHALL BE LIMITED TO AN AMOUNT EQUAL TO THE MONIES PAID TO THE COMPANY FOR THAT DEFECTIVE PRODUCT. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to Buyer. Please see the

Company's limited warranty statement for details on limitations.

**TO WHOM DOES THIS WARRANTY APPLY? –** The Company extends the following limited warranty to the original user only.

WHAT DOES THIS WARRANTY COVER AND HOW LONG DOES IT LAST? This warranty covers the following Commercial Products:

**BATH WASTE & OVERFLOW PRODUCTS WARRANTY –** Bath Waste & Overflow products are warranted against defects in material and workmanship for the life of the Products.

**GEBERIT INSTALLATION SYSTEMS –** Frame, Flushing Tanks, and Actuators for Geberit Installation Systems are warranted against defects in material and workmanship for the life of the Products. Filling and Flushing valves are warranted against defects in material and workmanship for 10 years from the date of Product purchase. The Company offers NO WARRANTY for Product batteries.

**FIVE YEAR FINISH WARRANTY – RESIDENTIAL –** For Products used in residential applications, the finish of the Product is warranted against material manufacturing defects for a period of five (5) years from the date of Product purchase.

**FOREVERSHINE™ and HARD COAT FINISHES WARRANTY – RESIDENTIAL –** ForeverShine™ and Hard Coat finishes installed in residential-use applications are warranted not to corrode, tarnish or discolor for the life of the Product.

**OTHER WARRANTIES –** All other Products not covered above are warranted against material manufacturing defects for a period of one (1) year from the date of Product purchase.

WHAT THIS WARRANTY DOES NOT COVER – The Company will not be liable for any labor, transportation or consequential expenses not specifically stated above. There is **NO WARRANTY** in cases of damage in transit, negligence, abuse, abnormal usage, misuse, accidents, normal wear and tear, damage due to environmental or natural

elements, failure to follow the Company's instructions, unauthorized repair, incorrectly performed maintenance or repair, improper installation or storage or use of acidic, abrasive cleaning materials. In order for this Warranty to apply, Buyer must retain and provide to the Company receipts showing date of Product purchase and documenting proper maintenance. Any oral or written description of the Products is for the sole purpose of identifying the Products and shall not be construed as an express warranty. THE COMPANY SHALL NOT BE LIABLE TO BUYER, OR TO ANYONE CLAIMING UNDER BUYER, FOR ANY OTHER OBLIGATIONS OR LIABILITIES, INCLUDING, BUT NOT LIMITED TO, OBLIGATIONS OR LIABILITIES ARISING OUT OF BREACH OF CONTRACT OR WARRANTY, NEGLIGENCE OR OTHER TORT OR ANY THEORY OF STRICT LIABILITY, WITH RESPECT TO THE PRODUCTS OR THE COMPANY'S ACTS OR OMISSIONS OR OTHERWISE. THE COMPANY AND BUYER AGREE THAT THE EXPRESS WARRANTIES DESCRIBED ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES. ALL OTHER EXPRESS WARRANTIES ARE DISCLAIMED. FOR COMMERCIAL PRODUCTS, ALL WARRANTIES IMPLIED BY LAW, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE DISCLAIMED. FOR CONSUMER PRODUCTS, WARRANTIES IMPLIED BY LAW, INCLUDING THOSE OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE EXPRESSLY LIMITED TO THE PERIOD OF THE EXPRESS LIMITED WARRANTY STATED ABOVE FOR THE **RELEVANT PRODUCT.** Some States do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. Any assistance the Company provides to or procures for Buyer outside the terms, limitations or exclusions of this warranty will not constitute a waiver of the terms, limitations or exclusions of this limited warranty, nor will such assistance extend or revive the warranty. The Company will not reimburse Buyer for any expenses incurred by Buyer in repairing, correcting or replacing any defective Products, except for expenses incurred with the Company's prior written permission.

**HOW TO GET SERVICE** – For complete warranty details, or to provide notice of a warranty claim or request warranty service, contact your Geberit Sales Representative or Geberit, Customer Service, 2100 S. Clearwater Drive, Des Plaines, Illinois 60018 or 847-803-5000. As the Company's sole and exclusive obligation under this warranty (and Buyer's sole and exclusive remedy), upon prompt written notice of breach from Buyer during the warranty period, the Company will either replace or repair the defective Product or refund the wholesale purchase price, at its option, if an inspection by the Company discloses defects in material or workmanship covered by this warranty. These warranty provisions do not cover the battery shipped with the electronic products.

LIMITATION ON DAMAGES – IN NO EVENT SHALL THE COMPANY BE LIABLE FOR INCIDENTAL, CONSEQUENTIAL, INDIRECT OR SPECIAL DAMAGES. WITHOUT LIMITING THE FOREGOING, THE COMPANY SHALL NOT BE LIABLE FOR ANY DAMAGE A PALM DEVICE OR ANY SOFTWARE OR RELATED EQUIPMENT ALLEGEDLY CAUSES TO A SYSTEM OR OTHERWISE. THE COMPANY'S AGGREGATE LIABILITY WITH RESPECT TO A DEFECTIVE PRODUCT AND THIS CONTRACT SHALL BE LIMITED TO AN AMOUNT EQUAL TO THE MONIES PAID TO THE COMPANY FOR THAT DEFECTIVE PRODUCT.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

**HOW DOES STATE LAW APPLY? –** This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

**Restrictions Apply** 

Geberit 2100 S. Clearwater Drive Des Plaines, IL 60018 USA

P 800-566-2100 F 847-803-5454

→ geberit.us



 $\ensuremath{\textcircled{\sc 0}}$  2013 Geberit. Product specifications subject to change without notice.

GNA7089 04/13