

fischer Zykon-Panel Anchor FZP-II

Product description

Undercut anchor for natural stone from 2 cm panel thickness.
Application with reveal angle or other attachment parts.


Advantages / benefits

- Stress-free fixing in natural stone
- Anchoring not visible from front of facade
- Static optimised position of anchor
- Higher collapse loads than traditional systems
- Fast and easy installation of reveal

Installation

Special drilling machines from fischer, are necessary for the drilling of the undercut hole. The anchor will be installed by a special fischer setting tool.

Drilling / anchor setting

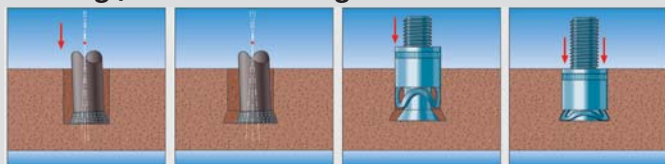

Approval



Technical data

Type	Item	Installed anchor length mm a	Drill hole-Ø mm	Anchorage depth mm	Thread diameter	Bolt projection length mm b	Box quantity pieces
FZP-II 11x12 M6/13 A4*	512 131	12	11	12	M6	13	250
FZP-II 11x12 M6/18 A4*	512 133	12	11	12	M6	18	250
FZP-II 11x15 M6/10 A4*	512 134	15	11	15	M6	10	250
FZP-II 11x15 M6/18 A4*	512 135	15	11	15	M6	18	250
FZP-II 13x15 M8/10 A4*	512 136	15	13	15	M8	10	250
FZP-II 13x15 M8/15 A4*	512 137	15	13	15	M8	15	250
FZP-II 13x15 M8/23 A4*	512 138	15	13	15	M8	23	250
FZP-II 13x15 M8/28 A4*	512 139	15	13	15	M8	28	250
FZP-II 13x17 M8/17 A4*	512 140	17	13	17	M8	17	250
FZP-II 13x21 M8/9 A4**	512 141	21	13	21	M8	9	250
FZP-II 13x21 M8/17 A4**	512 142	21	13	21	M8	17	250
FZP-II 13x21 M8/22 A4**	512 143	21	13	21	M8	22	250

* European Technical Approval ETA-11/0145

Application example

■ **Anchor in panel**
FZP-II, granite




■ Reveal

Facade panel with FZP-II and reveal angle assembled



■ Natural stone facade

with FZP-II and reveal angle



ACT Service

fischerwerke GmbH & Co. KG

Werk Altheim · Hindenburgstr. 81 · D-72160 Horb

Phone +49 (0)74 43 12-45 53 · Fax +49 (0)74 43 12-49 07

act@fischer.de · www.fischer.de