

**Metal Sales
Manufacturing Corporation**

This specification data sheet is provided by Metal Sales Manufacturing Corporation as a technical support tool incident to the sale of its Image II, 1" Mini-Batten, 1.5" Mini-Batten, Curved 1" Mini-Batten, and Stile products. Contact Metal Sales for more information on these and other products. Telephone: 800.406.7387 www.metalsales.us.com

Section 07 41 13 - METAL ROOF PANELS

1. PRODUCT NAMES

Image II, 1" Mini-Batten, 1.5" Mini-Batten, Curved 1" Mini-Batten, and Stile architectural metal roof panels.

2. MANUFACTURER

Metal Sales Manufacturing Corporation
545 South 3rd Street, Suite 200
Louisville, KY 40202
Toll Free: 800.406.7387
Phone: 502.855.4300
Fax: 502.855.4200
Web: www.metalsales.us.com
E-Mail: info@metalsales.us.com


3. PRODUCT DESCRIPTION

Basic Use

For more than 50 years, Metal Sales has earned a reputation as the premier provider of metal building components and accessories. Metal Sales maintains the industry's largest professional sales and service team, supported by 21 branches located throughout the United States, and offers a full line of high quality metal roof and wall panels for agricultural, commercial, architectural, industrial, and residential projects of every shape and size for both new construction and retrofit applications. Metal Sales is dedicated to leading the metal building component industry, by setting new standards for operating efficiency, product design, active service management and lasting value.

Manufacturer Memberships and Affiliations

CRRC - Cool Roof Rating Council
MCA - Metal Construction Association
CSI - Construction Specifications Institute
MRA - Metal Roofing Alliance
NRCA - National Roofing Contractors Association
USGBC - United States Green Building Council
ENERGY STAR® Partner

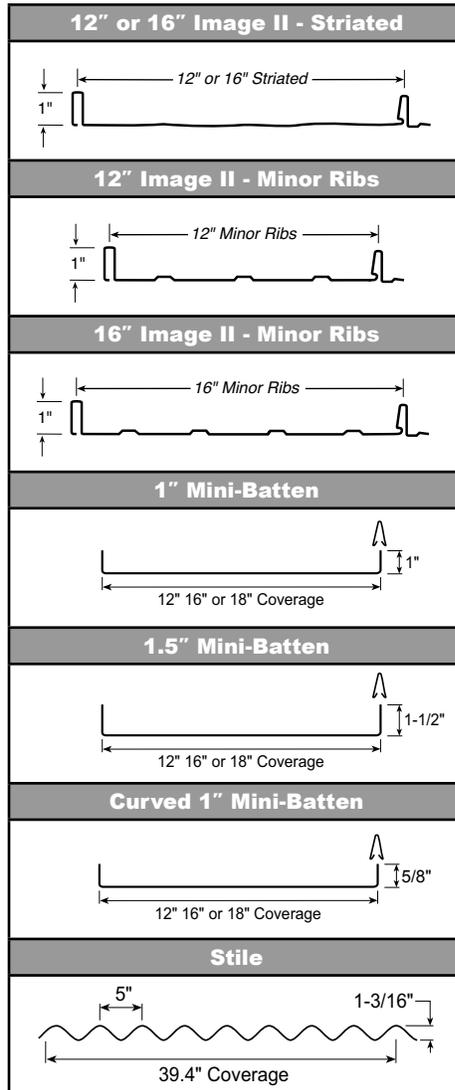

4. TECHNICAL DATA

Applicable Standards

ASTM International (ASTM):

- ASTM A 653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
- ASTM A 792 - Standard Specification for Steel Sheet, 55% Aluminum-Zinc Alloy-Coated by the Hot-Dip Process.
- ASTM A 1011 - Standard Specification for Steel, Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength.
- ASTM B 209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.



Denzinger Dentist Office, New Albany, IN

- ASTM D 2244 - Standard Practice for Calculation of Color Tolerances and Color Differences from Instrumentally Measured Color Coordinates.
 - ASTM D 4214 - Standard Test Methods for Evaluating the Degree of Chalking of Exterior Paint Films.
 - ASTM E 119 - Standard Test Methods for Fire Tests of Building Construction and Materials.
 - ASTM E 1514 - Standard Specification for Structural Standing Seam Steel Roof Panel Systems.
 - ASTM E 1592 - Standard Test Method for Structural Performance of Sheet Metal Roof and Siding Systems by Uniform Static Air Pressure Difference.
 - ASTM E 1637 - Standard Specification for Structural Standing Seam Aluminum Roof Panel Systems.
 - ASTM E 1646 - Standard Test Method for Water Penetration of Exterior Metal Roof Panel Systems by Uniform Static Air Pressure Difference.
 - ASTM E 1680 - Standard Test Method for Rate of Air Leakage through Exterior Metal Roof Panel Systems
 - ASTM E 2140 - Standard Test Method for Water Penetration of Metal Roof Panel Systems by Static Water Pressure Head.
- Underwriters Laboratories (UL):
- UL 263 - Fire Tests of Building Construction and Materials.
 - UL 580 - Tests For Uplift Resistance of Roof Assemblies.

●UL 790 - Standard Test Methods for Fire Tests of Roof Coverings.

●UL 2218 - Impact Resistance of Prepared Roof Covering Materials.

Approvals

Miami-Dade County: Code Approvals, Notice of Acceptance (NOA).

State of Florida: Florida Building Code 2010 Test Protocols for High-Velocity Hurricane Zones

Texas Windstorm Evaluation.

Physical Properties:

Test reports are available to design professionals upon request.

Note: Industry designation for material thickness is moving away from "gauge" to decimal thickness in inches. Metal Sales Manufacturing Corporation recommends use of a minimum thickness requirement of 0.018-inch (0.46-mm) instead of 26 gauge, 0.0236-inch (0.60-mm) instead of 24 gauge, and 0.0296-inch (0.75-mm) instead of 22 gauge.

Technical Properties for Image II Products:

▶ Panel Coverage: 12 inches (304.8 mm) or 16 inches (406.4 mm).

▶ Rib Height: 1 inch (25.4 mm).

▶ Material: Aluminum-zinc alloy-coated steel sheet, ASTM A 792, Class AZ50 or AZ55 coating designation, structural quality, Grade 50, 0.0236-inch (0.60-mm) minimum thickness. Select AZ50 for painted material or AZ55 for unpainted material.

▶ Material: Aluminum sheet, ASTM B 209, 0.032 inch (0.813 mm) or 0.040 inch (1.016 mm) thick.

▶ Minimum Roof Slope Capability: 3:12 over solid substrate.

▶ Side Lap: Snap seamed.

▶ Attachment: Concealed direct fastened panel.

▶ Application: Designed for application over solid substrate.

▶ Panel Surface Configuration: Striations or minor ribs.

▶ Surface Finish: PVDF (Kynar 500 or Hylar 5000), MS Colorfast45 or Acrylic Coated Galvalume.

▶ Color: Contact Metal Sales Manufacturing Corporation for information on color availability.

▶ Testing: Fire Resistance Rating: Designed for compliance with UL 263 and UL 790 Class A Fire Resistance Ratings.

Impact Resistance: Complies with UL 2218, Class 4. Water Infiltration: No leakage when tested according to Florida Building Code TAS 100.15.

Wind Uplift Resistance: Complies with UL 580, Class 90 Wind Uplift, Construction 529.

Code and Testing Agency Approvals:

Complies with Miami-Dade County Approval NOA 08-0229.12.



Residence, Louisville, KY

Complies with 2010 State of Florida Building Code Approval: 11560.2, 11560.3, 11560.4 and 14645.10. Complies with Texas Windstorm Evaluation RC-162.

Technical Properties for 1" Mini-Batten, 1.5" Mini-Batten or Curved 1" Mini-Batten Products:

▶ Panel Coverage: 12 inches (304.8 mm), 16 inches (406.4 mm) or 18 inches (457.2 mm).

▶ Rib Height: 1 inch (25.4 mm) or 1-1/2 inches (38.1 mm).

▶ Material: Aluminum-zinc alloy-coated steel sheet, ASTM A 792, [AZ50] [AZ55] coating designation, structural quality, Grade 50, [minimum thickness].

▶ Minimum Roof Slope Capability: 3:12.

▶ Minimum Convex Radius Capability (barrel shape): 4'-0".

▶ Minimum Concave Radius Capability (u-shape): 4'-0".

▶ Side Lap: Snap-on batten cap.

▶ Attachment: Concealed clip designed for thermal movement.

▶ Application: Designed for application over solid substrate.

▶ Surface Finish: PVDF (Kynar 500 or Hylar 5000), MS Colorfast45, Acrylic Coated Galvalume.

▶ Color: Contact Metal Sales Manufacturing Corporation for information on color availability.

▶ Testing: Fire Resistance Rating: Complies with UL 263 and UL 790 Class A Fire Resistance Ratings.

Impact Resistance: Complies with UL 2218 Class 4. Wind Uplift Resistance: Comply with UL 580, Class 90 Wind Uplift, Construction 397, 397A, and 430. (Applies to 1" Mini-Batten panels.)

Wind Uplift Resistance: Comply with UL 580, Class 90 Wind Uplift, Construction 352. (Applies to 1.5" Mini-Batten panels.)

Technical Properties for Stile Products:

▶ Panel Coverage: 39.4 inches (1000 mm).

▶ Rib Height: 1-3/16 inches (30.2 mm).

▶ Material: Galvanized steel sheet, ASTM A 653, G90 coating designation, structural quality, Grade 40, minimum thickness.

▶ Minimum Roof Slope Capability: 3:12 over solid substrate.

▶ Side Lap: Mechanically fastened.

▶ Attachment: Exposed direct fastened panel.

▶ Application: Designed for application over solid substrate.

▶ Surface Finish: PVDF (Kynar 500 or Hylar 5000).

▶ Color: Spanish Clay, Slate Grey, Ocean Blue, Classic Green, Regal Red, Tudor Brown, White.

▶ Testing: Fire Resistance Rating: Complies with UL 790 Class A Fire Resistance Ratings.

Impact Resistance: Complies with UL 2218 Class 4. Water Penetration: No leakage when tested according to Florida Building Code TAS 100.

Wind Uplift Resistance: Complies with UL 580, Class 90 Wind Uplift, Construction 533.

Code and Testing Agency Approvals:

Complies with Miami-Dade County Approval NOA 08-0229.11.

Complies with 2010 State of Florida Building Code Approval: 11560.7, 11560.8.

Complies with Texas Windstorm Evaluation RC-163.

Environmental Considerations

Construction metals generally are readily recyclable at the end of their service life. The raw materials used in manufacture of standing seam panels also come from recycled sources. Post industrial and post consumer recycled content varies.

Fire Performance

Flame-Spread Index: 25 or less (Class A).

Smoke-Developed Index: 450 or less.

5. INSTALLATION

Handling and Storage

Handle and store product according to Metal Sales recommendations. Deliver materials in original, unopened, undamaged containers with identification labels intact. Store materials above ground, under waterproof covering, protected from exposure to harmful weather conditions and at temperature and humidity conditions recommended by manufacturer. Provide proper ventilation of metal panel system to prevent condensation build-up between each panel and trim or flashing component. Store metal panel products in manufacturer's unopened packaging until ready for installation. Exercise caution in unloading and handling metal panel system to prevent bending, warping, twisting and surface damage.

Preparation

Install substrate boards over roof deck and sheathing over entire roof surface using recommended fasteners. Install furring, eave angles, sub-purlins, and other miscellaneous roof panel support members and anchor according to metal roof panel manufacturer's recommendations.

Underlayment Installation

Install self-adhering sheet underlayment and felt underlayment as required. Apply slip sheet over underlayment prior to installing metal roof panels. Install flashing in compliance with requirements in Division 07 Section "Sheet Metal Flashing and Trim."

Thermal Insulation Installation

Install polyethylene vapor retarder if required. Install board insulation if required, in compliance with installation requirements in Division 07 Section "Thermal Insulation."

Install blanket insulation if required, in compliance with installation requirements in Division 07 Section "Thermal Insulation."

Metal Roof Panel Installation

Verify that site conditions are acceptable for installation. Do not proceed with installation until unacceptable conditions are corrected. Comply with panel manufacturer's installation instructions including but not limited to special techniques, interface with other work, and integration of systems. Fasten metal roof panels to supports with concealed clips at each standing-seam joint at location, spacing, and using proper fasteners as recommended by panel manufacturer. Comply with installation tolerances as required.

Accessory Installation

Install accessories using techniques recommended by manufacturer and which will assure positive

anchorage to building and weather tight mounting. Provide for thermal movement. Coordinate installation with flashings and other components. For Flashing and Trim, comply with performance requirements, manufacturer's written installation instructions, and the SMACNA "Architectural Sheet Metal Manual." Provide concealed fasteners where possible, and install units to true level. Install work with laps, joints, and seams that will be permanently watertight.

Field Quality Control

If requested by Owner, provide manufacturer's field service consisting of product use recommendations and periodic site visits for inspection of product installation in accordance with manufacturer's instructions.

Precautions, Cleaning and Protection

Touch-up paint is used to cover and protect unexpected scratches on the paint finish that may occur during installation of panel. Touch-up paint will not weather as well or at the same rate as the original system. Test in an area that will not be noticeable. Metallic paint colors are available at an additional charge. Minor differences in color and appearance are normal and to be expected.

To minimize possible differences in appearance, an entire project should be painted at one time, from one batch of paint, using the same application equipment. Additionally, fabricated panels, flat sheet, and flashings should be oriented in the same direction.

After installation remove temporary coverings and protection of adjacent work areas. Repair or replace any installed products that have been damaged. Clean installed panels in accordance with manufacturer's instructions prior to Owner's acceptance. Remove and lawfully dispose of construction debris from Project site. Protect installed product and finish surfaces from damage during construction.

Building Codes

Current data on building code requirements and product compliance may be obtained from Metal Sales technical support specialists. Installation must comply with the requirements of authority having jurisdiction.

6. AVAILABILITY AND COST

Availability

Metal Sales products are nationally distributed and supported from 21 convenient locations nationwide, including Alaska. Metal Sales has the ability to ship worldwide. Contact Metal Sales for information on local availability.

Cost

Budget installed cost information may be obtained from a local Metal Sales distributor or through the manufacturer.

7. WARRANTIES

Paint Finish Warranty

Metal Sales' standard PVDF (Kynar 500®) Fluorocarbon System Warranty for film integrity, chalking and fade rating in which manufacturer agrees to repair or replace panels that show evidence of deterioration within specified warranty period. Deterioration shall include but is not limited to color fading of more than 5 Hunter units when tested according to ASTM D 2244, chalking in excess of a No. 8 rating when tested according to ASTM D 4214 or cracking, checking, peeling or failure of paint to adhere to bare metal. Warranty Period for film integrity is 45 years and for chalking and fade rating is 35 years.

8. MAINTENANCE

No specific maintenance is required for properly installed Metal Sales standing seam panel products. Periodic roof inspection to verify system integrity, drainage functionality and repair of storm damage is advised.

9. TECHNICAL SERVICES

Technical assistance, including more detailed information, product literature, test results, project lists, assistance in preparing project specifications and arrangements for application supervision, is available by contacting Metal Sales.

10. FILING SYSTEMS

Additional product information is available from the manufacturer upon request.

1. McGraw-Hill Sweets
2. ARCAT



Residence